






17CVSS SERIES 304 STAINLESS STEEL CHECK VALVE (THREADED)

Specification:


- Cast 304 stainless steel body and poppet
- Viton O-ring seal
- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 200 PSI
- 200 PSI WOG Non-Shock - WOG pressure rating based on ambient temperature
- Max Temp Rating: 180°F (82°C)

Certification:

- NSF/ANSI Standard 372 Certified

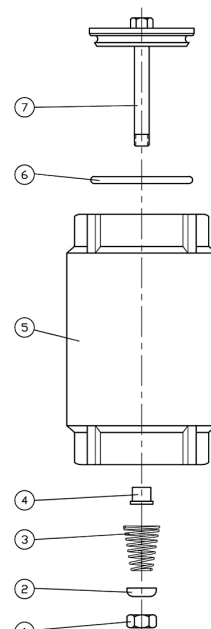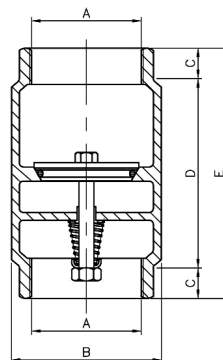

Material List		
No.	Part Name	Material
1	Hex Nut	304 Stainless Steel
2	Cup Washer	304 Stainless Steel
3	Spring	304 Stainless Steel
4	Bushing	Polyethylene
5	Body	304 Stainless Steel
6	O-ring	Viton
7	Poppet	304 Stainless Steel

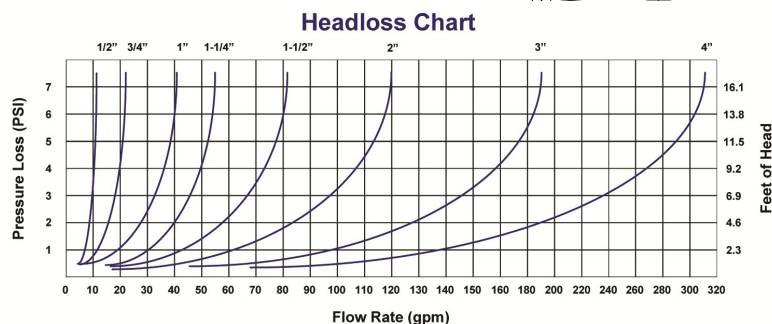

Dimensions										
Part No.	A	B		C		D		E		Weight
		inches	mm	inches	mm	inches	mm	inches	mm	grams
17CVSS-050	1/2" FPT	1.260	32	0.394	10.01	1.646	41.81	2.433	61.798	170
17CVSS-075	3/4" FPT	1.496	38	0.402	10.21	1.909	48.49	2.717	69.012	230
17CVSS-100	1" FPT	1.772	45.01	0.472	11.99	2.283	57.99	3.228	81.991	330
17CVSS-125	1-1/4" FPT	2.126	54	0.531	13.49	2.559	65	3.622	91.999	550
17CVSS-150	1-1/2" FPT	2.362	59.99	0.610	15.49	2.823	71.70	4.043	102.69	650
17CVSS-200	2" FPT	3.031	76.99	0.650	16.51	3.740	95	5.039	127.99	1240
17CVSS-300	3" FPT	4.213	107	1.181	30	4.921	124.99	7.283	184.99	4050
17CVSS-400	4" FPT	5.512	140	1.969	50.01	6.457	164.01	10.394	264.01	8070
17CVSSMF-125-100	1" FPT x 1-1/4" MPT	1.772	45.01	0.472	11.99	2.283	57.99	3.228	81.991	370



25 Whaley Ave., Milverton, Ontario, Canada N0K 1M0

Tel: (519)-595-4444

Fax: (519)-595-4380

Toll Free: (800)-561-3164

Web: www.boshart.com