




**WD SERIES**  
Tag: \_\_\_\_\_

**Grease Interceptor**

**SPECIFICATION:** Watts Drainage Products WD Series epoxy coated inside and outside fabricated steel grease interceptor with flow rating of 75 to 300 gpm and grease capacity of 150 to 600 lbs. Unit shall include one piece removeable baffle assembly, code approved deep seal trap, secured and gasketed non slip cover, NH (MJ) (standard) inlet and outlet and internal flow control.

ISO 9002  
CERTIFIED

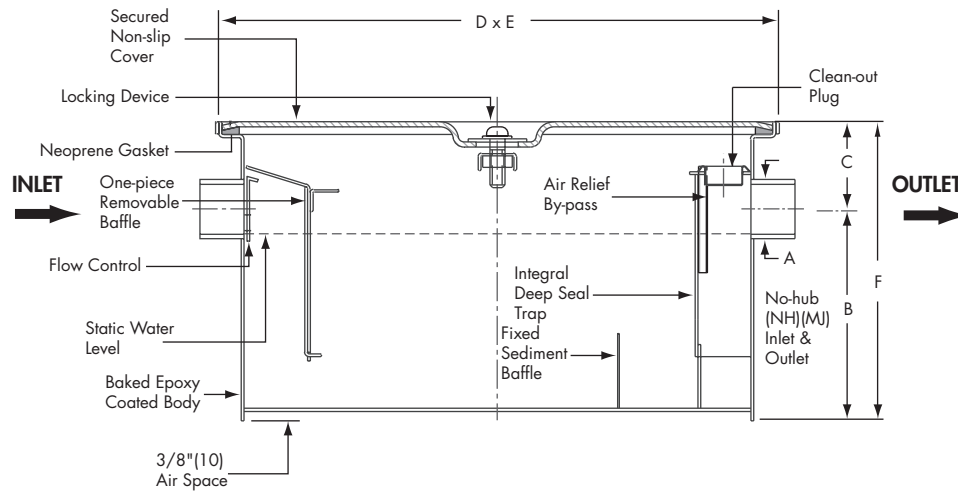

| Flow Rate (Select One) |                                  |
|------------------------|----------------------------------|
| Suffix                 | Description                      |
| 175                    | 75 GPM <input type="checkbox"/>  |
| 210                    | 100 GPM <input type="checkbox"/> |
| 215                    | 150 GPM <input type="checkbox"/> |
| 220                    | 200 GPM <input type="checkbox"/> |
| 225                    | 250 GPM <input type="checkbox"/> |
| 230                    | 300 GPM <input type="checkbox"/> |

| Options (Select One or More) |   |
|------------------------------|---|
| Suffix                       | Description   |
| -B                           | Sediment Bucket <input type="checkbox"/>                    |
| -DI                          | Dual Inlet <input type="checkbox"/>                         |
| -E                           | Electronics <input type="checkbox"/>                        |
| -F                           | Flange <input type="checkbox"/>                             |
| -FC                          | Flange & Clamp Device <input type="checkbox"/>              |
| -HDC                         | Heavy Duty Cover 1,000 lbs. <input type="checkbox"/>        |
| -O                           | Inlet & Outlet other than standard <input type="checkbox"/> |
| -SS                          | Stainless Steel <input type="checkbox"/>                    |
| -MEFC                        | MJ External Flow Control <input type="checkbox"/>           |
| -TEFC                        | Threaded External Flow Control <input type="checkbox"/>     |
| -X#                          | Extension as Required <input type="checkbox"/>              |
| -XHDC                        | Extra Heavy Duty Cover 10,000 lbs. <input type="checkbox"/> |
| -IP                          | Injection Port <input type="checkbox"/>                     |
| -ALC                         | Aluminum Cover <input type="checkbox"/>                     |
| -FSB                         | Fish Scale Bucket <input type="checkbox"/>                  |

| Optional Inlet/Outlet Sizes (When -O is selected above)             |   |
|---|---|
| Suffix  | Description                                   |
| -2  | 2"(51) Inlet/Outlet <input type="checkbox"/>  |
| -3  | 3"(76) Inlet/Outlet <input type="checkbox"/>  |
| -4  | 4"(102) Inlet/Outlet <input type="checkbox"/> |
| -6  | 6"(152) Inlet/Outlet <input type="checkbox"/> |
| ***Threaded Outlet or MEFC/TEFC External Flow Control Not Available |   |

| Interceptor Catalog Number | Grease Capacity lbs. | A              | B              | C             | D         | E         | F            |
|----------------------------|----------------------|----------------|----------------|---------------|-----------|-----------|--------------|
|                            |                      | Inlet & Outlet | Base to Center | Top to Center | Length    | Width     | Height       |
| WD-175                     | 150                  | 4"(102)        | 18-1/2"(470)   | 6"(152)       | 36"(914)  | 24"(610)  | 24-1/2"(622) |
| WD-210                     | 200                  | 4"(102)        | 29"(737)       | 10"(254)      | 40"(1016) | 28"(711)  | 39"(991)     |
| WD-215                     | 300                  | 4"(102)        | 39"(991)       | 10"(254)      | 40"(1016) | 28"(711)  | 49"(1245)    |
| WD-220                     | 400                  | 4"(102)        | 37"(940)       | 10"(254)      | 50"(1270) | 34"(864)  | 47"(1194)    |
| WD-225                     | 500                  | 4"(102)        | 39"(991)       | 10"(254)      | 50"(1270) | 34"(864)  | 49"(1245)    |
| WD-230                     | 600                  | 6"(150)        | 38"(965)       | 10"(254)      | 76"(1930) | 45"(1143) | 48"(1219)    |

Job Name \_\_\_\_\_ Model No. \_\_\_\_\_  
 Job Location \_\_\_\_\_ Contractor \_\_\_\_\_  
 Engineer \_\_\_\_\_ Representative \_\_\_\_\_

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

CANADA: 5435 North Service Road, Burlington, ON L7L5H7 TEL: 905-332-6718 TOLL FREE: 1-888-208-8927 Website: www.wattscanada.ca

ES-WD-WD-SERIES Canada 1417

(Dimension) Denotes Millimeters