




WD-CSA SERIES

Tag: _____

Grease Interceptor

SPECIFICATION: Watts Drainage Products WD-CSA Series epoxy coated inside and outside fabricated steel grease interceptor with flow rating of 4 to 75 gpm and grease capacity of 8 to 150 lbs. Unit shall include one piece removable baffle assembly, code approved deep seal trap, secured and gasketed non slip cover, NH (MJ) (standard) inlet and outlet and external flow control.

ISO 9002
CERTIFIED

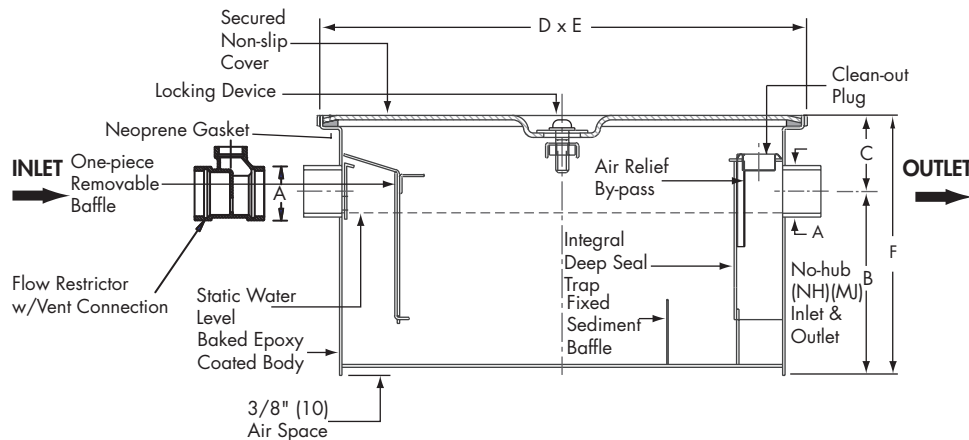

Interceptor Catalog Number	Grease Capacity lbs.	A	B	C	D	E	F
		Inlet & Outlet	Base to Center	Top to Center	Length	Width	Height
WD-104	8	2"(51)	7-3/4"(197)	6"(152)	16"(406)	10"(254)	13-3/4"(349)
WD-107	14	2"(51)	8-1/2"(216)	6"(152)	18"(457)	13"(330)	14-1/2"(368)
WD-110	20	2"(51)	8-1/2"(216)	6"(152)	21-3/4"(552)	14"(356)	14-1/2"(368)
WD-115	30	2"(51)	10-1/2"(267)	6"(152)	22"(559)	15"(381)	16-1/2"(419)
WD-120	40	3"(76)	11-1/2"(292)	6"(152)	24"(610)	15-3/4"(400)	17-1/2"(445)
WD-125	50	3"(76)	12"(305)	6"(152)	26"(660)	16-1/2"(419)	18"(457)
WD-135	70	4"(102)	14"(356)	6"(152)	30"(762)	18"(457)	20"(508)
WD-150	100	4"(102)	16"(406)	6"(152)	32"(813)	22"(559)	22"(559)
**WD-175	150	4"(102)	18-1/2"(470)	6"(152)	36"(914)	24"(610)	24-1/2"(622)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Flow Rate (Select One)		
Suffix	Description	
104	4 GPM	☐
107	7 GPM	☐
110	10 GPM	☐
115	15 GPM	☐
120	20 GPM	☐
125	25 GPM	☐
135	35 GPM	☐
150	50 GPM	☐
175	75 GPM	☐

Options (Select One or More)		
Suffix	Description	
-B	Sediment Bucket	☐
-DI	Dual Inlet	☐
-E	Electronics	☐
-F	Flange	☐
-FC	Flange & Clamp Device	☐
-HDC	Heavy Duty Cover 1,000 lbs.	☐
-O	Inlet & Outlet Other Than Standard	☐
-SS	Stainless Steel	☐
-X#"	Extension as Required	☐
-XHDC	Extra Heavy Duty Cover 10,000 lbs.	☐
-IP	Injection Port	☐
-ALC	Aluminum Cover	☐
-FSB	Fish Scale Bucket	☐

Optional Inlet/Outlet Sizes		
Suffix	Description	
-2	2"(51) Inlet/Outlet	☐
-3	3"(76) Inlet/Outlet	☐
-4	4"(102) Inlet/Outlet	☐
-6	6"(152) Inlet/Outlet	☐

NOTICE

**WD-175 not CSA certified, comes with internal flow control.

Job Name _____

Contractor _____

Job Location _____

Contractor's P.O. No. _____

Engineer _____

Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

ES-WD-CSA-SERIES-CAN 1624



A Watts Water Technologies Company

© 2016 Watts