

RED-WHITE



Lead Free Cast Bronze
Threaded Gate Valves


206A-LF



- Inside Screw
- Non Rising Stem
- Screwed Ends
- Class 125

FACE TO FACE OR END TO END TOYO STANDARD
END CONNECTION ASME B1.20.1
WALL THICKNESS TOYO STANDARD
PRESSURE TEST TOYO STANDARD

Service conditions:
200 WOG
123 Saturated Steam

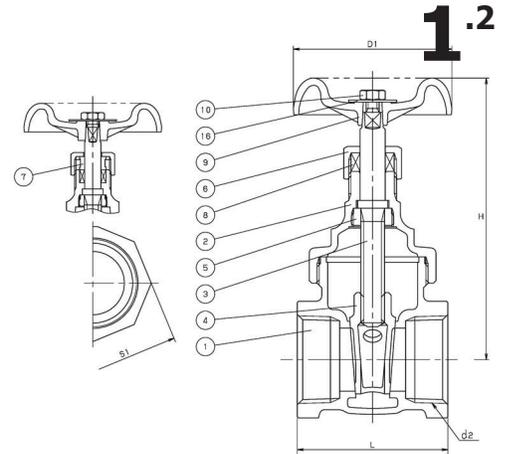

MATERIAL 3421			
PART	MATERIAL	SPECIFICATION	
1	BODY	CAST BRONZE (CAC911 (2))	CDA No. C89530
2	BONNET	CAST BRONZE (CAC911 (2))	CDA No. C89530
3	STEM	BRASS ROD (KSB-4XC (3))	CDA No. C46750
4	DISC	FORGED BRASS (KSB-4XA (3))	CDA No. C46750 1/2 ONLY
		CAST BRONZE (CAC911 (2))	CDA No. C89530 3/4 & OVER
5	LOCK NUT	BRASS ROD (KSB-4XC (3))	CDA No. C46750
6	PACKING NUT	FORGED BRASS	B283 No. C37700
7	GLAND	BRASS ROD	B16
8	GLAND PACKING	ARAMID FIBERS GRAPHITE	
9	HAND WHEEL	ALUMINUM DIE-CAST	B85
10	WHEEL NUT	CARBON STEEL	A307 Gr. B
16	NAME PLATE	ALUMINUM	

(2) CAC911 IS LEAD FREE BRONZE.
(3) KSB-4XA AND KSB-4XC ARE LEAD FREE BRASS.

DIMENSIONS					
SIZE		H	D1	L	S1
mm	in				
15	1/2	80	50	45	28
20	3/4	90	55	50	34
25	1	105	60	57	41
32	1 1/4	118	70	61	50
40	1 1/2	135	80	67	57
50	2	159	90	74	70

