




17YBFVNL SERIES NO LEAD BRASS FOOT VALVE (THREADED)

Specification:

- Cast no lead brass body and poppet
- NBR O-ring seal
- 304 stainless steel screen with .104" dia holes
- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 200 PSI
- 200 PSI WOG Non-Shock - WOG pressure rating based on ambient temperature
- Max Temp Rating: 180°F (82°C)

Certification:



- NSF/ANSI Standard 372 Certified



Third Party
Certified to
NSF / ANSI 372



Material List		
No.	Part Name	Material
1	Hex Nut	304 Stainless Steel
2	Cup Washer	304 Stainless Steel
3	Spring	304 Stainless Steel
4	Body	C89540 Brass
5	O-ring	NBR
6	Poppet	C89540 Brass
7	Screw	304 Stainless Steel
8	Screen Cap	304 Stainless Steel
9	Screen	304 Stainless Steel

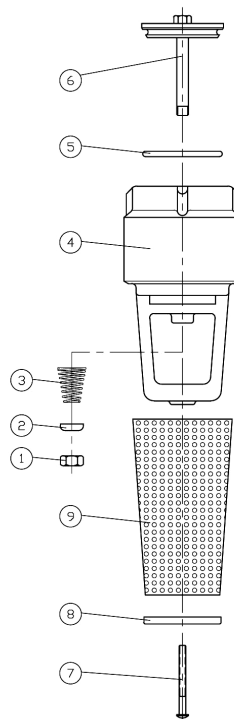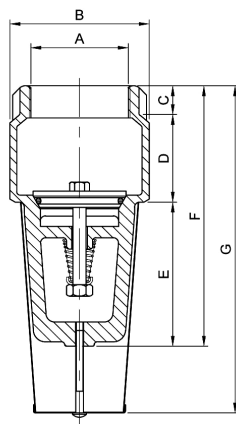

Dimensions														
Part No.	A	B		C		D		E		F		G		Weight
		inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	grams
17YBFV050NL	1/2" FPT	1.220	30.99	0.374	9.5	0.834	21.18	1.575	40.005	2.787	70.79	3.22	81.788	160
17YBFV075NL	3/4" FPT	1.457	37.01	0.394	10.01	0.937	23.8	1.87	47.498	3.201	81.305	3.346	84.988	200
17YBFV100NL	1" FPT	1.732	43.99	0.453	11.51	1.142	29.01	2.146	54.508	3.74	94.996	4.614	117.2	320
17YBFV125NL	1-1/4" FPT	2.087	53.01	0.531	13.49	1.26	32	2.39	60.706	4.181	106.2	5.075	128.91	420
17YBFV150NL	1-1/2" FPT	2.362	59.99	0.610	15.49	1.358	34.49	3.091	78.511	5.059	128.5	5.862	148.89	570
17YBFV200NL	2" FPT	2.953	75.01	0.650	16.51	1.728	43.89	3.268	83.007	5.646	143.41	7.161	181.89	1030
17YBFV300NL	3" FPT	4.685	119	1.181	30	2.52	64.01	4.173	105.99	7.874	200	9.315	236.6	2900
17YBFV400NL	4" FPT	5.906	150	1.378	35	3.386	86	4.98	126.49	9.744	247.5	13.677	347.4	5800



25 Whaley Ave., Milverton, Ontario, Canada N0K 1M0

Tel: (519)-595-4444

Toll Free: (800)-561-3164

Fax: (519)-595-4380

Web: www.boshart.com