

# #40 Split Ring Clamp

**Finishes** Zinc Plated, Rubber Lined

**Materials** Carbon Steel / EPDM Rubber


**Approvals** MSS SP-58 (Type 12)

**Recommended** Recommended for the suspension of insulated and non-insulated pipe lines.

**Notes** UV resistant rubber lining provides for noise reduction and vibration control.

Swing gate style clamp for quick and easy installation (no loose hardware).

Temperature range use -20F to +230F

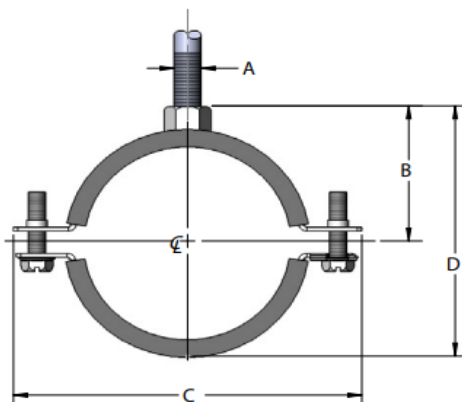

| Iron Pipe Size | Copper Tube Size | Metric Size (mm) | SPECIFICATION DATA |         |         |        | LBS Each | Rec. Max Load (Lbs) |
|----------------|------------------|------------------|--------------------|---------|---------|--------|----------|---------------------|
|                |                  |                  | A                  | B       | C       | D      |          |                     |
| 1/4            | 3/8              | 11-14            | 3/8 - 16           | 7/8     | 2 3/16  | 1 3/8  | .11      | 180                 |
| 3/8            | 1/2              | 15-18            | 3/8 - 16           | 15/16   | 2 3/8   | 1 1/2  | .12      | 180                 |
| -              | 5/8              | 19               | 3/8 - 16           | 1       | 2 3/8   | 1 5/8  | .12      | 180                 |
| 1/2            | 3/4              | 20-23            | 3/8 - 16           | 1 1/16  | 2 9/16  | 1 3/4  | .14      | 180                 |
| 3/4            | 1                | 25-29            | 3/8 - 16           | 1 3/16  | 2 3/4   | 2      | .15      | 180                 |
| 1              | 1 1/4            | 30-35            | 3/8 - 16           | 1 1/4   | 3 1/8   | 2 1/4  | .17      | 180                 |
| 1 1/4          | 1 1/2            | 40-45            | 3/8 - 16           | 1 7/16  | 3 1/2   | 2 1/2  | .19      | 180                 |
| 1 1/2          | -                | 46-51            | 3/8 - 16           | 1 9/16  | 3 3/4   | 2 3/4  | .2       | 180                 |
| -              | 2                | 53-59            | 3/8 - 16           | 1 11/16 | 3 15/16 | 3      | .26      | 180                 |
| 2              | -                | 59-64            | 3/8 - 16           | 1 3/4   | 4 1/8   | 3 1/4  | .27      | 180                 |
| -              | 2 1/2            | 67-71            | 3/8 - 16           | 1 15/16 | 4 7/16  | 3 1/2  | .29      | 300                 |
| 2 1/2          | -                | 72-78            | 3/8 - 16           | 2 1/16  | 4 3/4   | 3 3/4  | .36      | 300                 |
| -              | 3                | 80-84            | 3/8 - 16           | 2 1/4   | 5       | 4 1/16 | .38      | 300                 |
| 3              | -                | 86-92            | 3/8 - 16           | 2 7/16  | 5 7/16  | 4 7/16 | .41      | 300                 |
| -              | 3 1/2            | 95-99            | 3/8 - 16           | 2 1/2   | 5 9/16  | 4 9/16 | .41      | 300                 |
| 3 1/2          | 4                | 100-107          | 3/8 - 16           | 2 3/4   | 6 1/8   | 5 1/16 | .67      | 300                 |
| 4              | -                | 108-116          | 3/8 - 16           | 2 15/16 | 6 7/16  | 5 7/16 | .70      | 300                 |

QWI 4.3.1 Issue Date Apr/23 Rev.4

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at [www.taylorwalraven.ca](http://www.taylorwalraven.ca)

For more information, please contact Customer Service at 1-800-263-8652