


RED-WHITE
Lead Free Bronze Valves
Solder Globe Valves

212A-LF

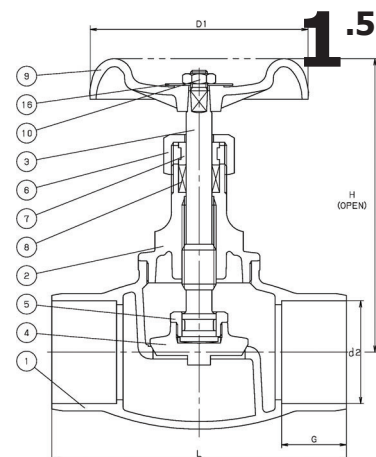

- Screwed Bonnet
- Inside Screw
- Solder-Joint Ends
- Rising Stem
- Lead-Free To .25%

STANDARDS

END TO END TOYO STANDARD
END CONNECTION ASME B16.18

Service conditions:

200 WOG
125 Saturated Steam

MATERIAL LIST		
NO.	NAME OF PART	SPECIFICATION
1	BODY	CAST BRONZE CDA No. C89530 (CAC911 (2))
2	BONNET	FORGED BRASS CDA No. C46750 (KSB-4XA (3))
3	STEM	BRASS ROD CDA No. C46750 (KSB-4XC (3))
4	DISC	BRASS ROD CDA No. C46750 (KSB-4XA (3)) 1/2-1
		CAST BRONZE CDA No. C89530 (CAC911 (2)) 1 1/4-2
5	LOCK NUT	FORGED BRASS CDA No. C46750 (KSB-4XC (3))
6	PACKING NUT	FORGED BRASS B283 No. C37700
7	GLAND	BRASS ROD B16
8	GLAND PACKING	ARAMID FIBERS GRAPHITE
9	HAND WHEEL	ALUMINUM DIE-CAST B85
10	WHEEL NUT	BRASS ROD B16
16	NAME PLATE	ALUMINUM

Notes:

(2) CAC911 IS LEAD FREE BRONZE

(3) KSB-4XA AND KSB-4XC ARE LEAD FREE BRASS

DIMENSIONS							
SIZE		d2		H	D1	L	G
mm	in	MAX	MIN				
15	1/2	16.03	15.93	76	60	64	12.7
20	3/4	22.38	22.28	98	70	84	19.1
25	1	28.75	28.65	108	80	100	23.1
32	1 1/4	35.10	35.00	137	90	115	24.6
40	1 1/2	41.48	41.35	160	100	130	27.7
50	2	54.18	54.05	180	115	155	34.0

