

# Submittal Data

PROJECT:	UNIT TAG:	QUANTITY: 1
REPRESENTATIVE: ANDREW SHERET LTD	TYPE OF SERVICE:	
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




## UPS 26-150 SF


UPS N is a three-speed circulator pump with a corrosion-resistant stainless-steel pump housing designed for hot-water recirculation. The pump provides reliable and maintenance-free operation.

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Liquid: Water	Liquid temperature range: 35.6 .. 230 °F	Max. power input: 370 W
Temperature: 140 °F	Maximum ambient temperature: 104 °F	Mains frequency: 60 Hz
Specific Gravity: 0.985	Type of connection: S.S. Flange	Thermal protection: Internal
	Pipe connection: 2-BOLT FLANGE	
	Product number: 95906632	

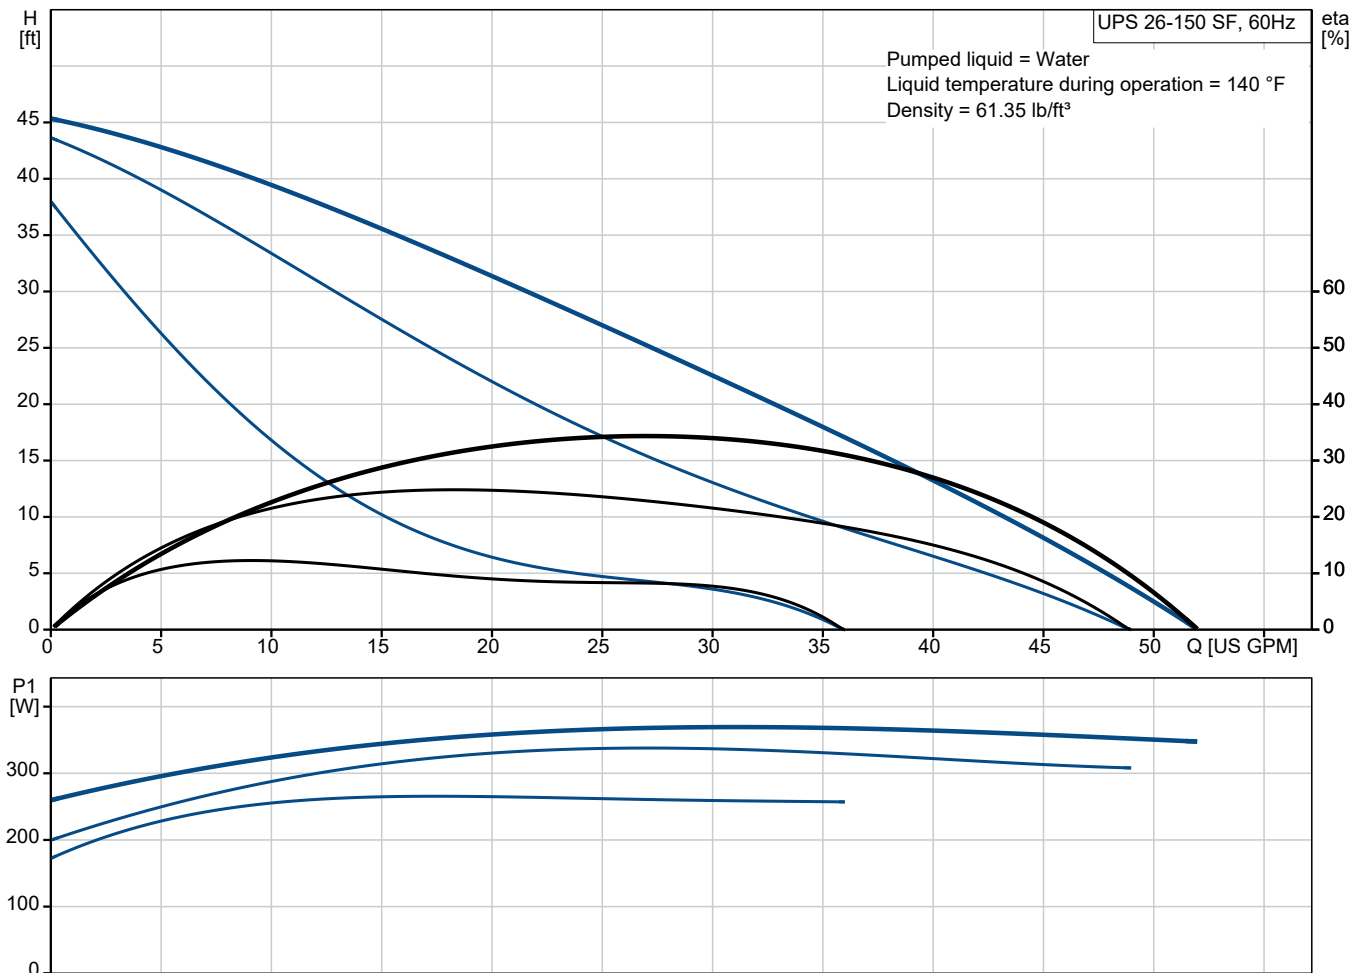

# Submittal Data

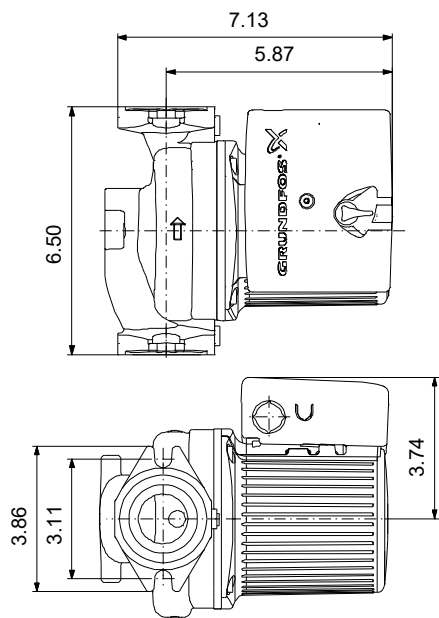

**Materials:**  
Pump housing: Stainless steel  
Pump housing: ASTM A351-CF8  
Impeller: Composite

Qty.	Description
------	-------------

1	UPS 26-150 SF
---	---------------



Note! Product picture may differ from actual product

Product No.: [95906632](#)

Grundfos UPS N circulator pumps have a corrosion-free stainless-steel pump housing and are recommended for domestic hot-water recirculation and underfloor heating systems. UPS N can be connected to an on/off time switch to limit pump operation to periods when hot water is usually required.

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump is characterized by:

- Ceramic shaft and radial bearings.
- Carbon axial bearing.
- Stainless steel rotor can and bearing plate.