

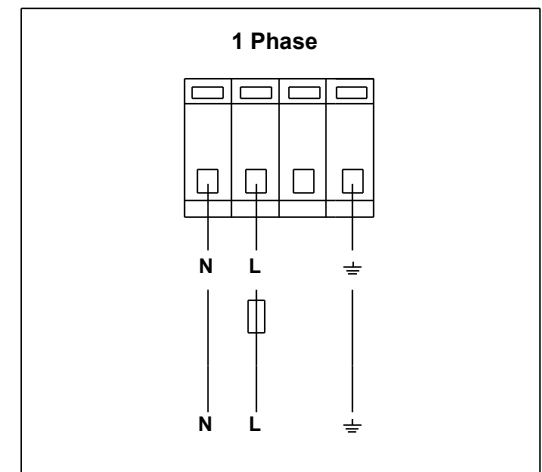
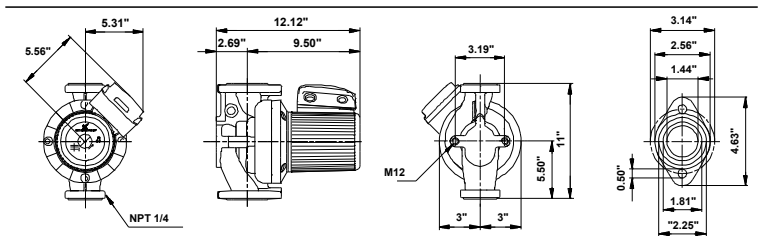


Description	Value
General information:	
Product name:	UPS 32-80 F B
Product No:	96402713
EAN number:	5700390678579
Technical:	
Speed no:	3
Maximum head:	26.25 ft
Approvals:	CCSAUS,IAPMO
Model:	C
Materials:	
Pump housing:	Bronze
Pump housing:	CuSn10
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Installation:	
Range of ambient temperature:	32 .. 104 °F
Maximum operating pressure:	145.04 psi
Type of connection:	DIN
Pipe connection:	GF 15/26
Pressure rating for connection:	PN 10
Port-to-port length:	11 in
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	14 .. 248 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft ³
Electrical data:	
Power input in speed 1:	0.3352 HP
Power input in speed 2:	260 W
Max. power input:	280 W
Mains frequency:	60 Hz
Rated voltage:	1 x 115 V
Current in speed 1:	2.5 A
Current in speed 2:	2.5 A
Current in speed 3:	2.66 A
Cos phi in speed 1:	0.87
Cos phi in speed 2:	0.9
Cos phi:	0.92
Capacitor size - run:	30 µF/400 V
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	F
Built-in motor protection:	CONTACT
Thermal protec:	INT.
R a:	9.55 - 12.6 ohm
R s1:	3.05 - 4.0 ohm
R s2:	6.7 - 8.8 ohm
Controls:	
Relay:	Y
Others:	
Terminal box position:	1.30H
Net weight:	39.2 lb
Gross weight:	46.7 lb
Shipping volume:	2.08 ft ³
Country of origin:	RS
Custom tariff no.:	8413.70.00.23

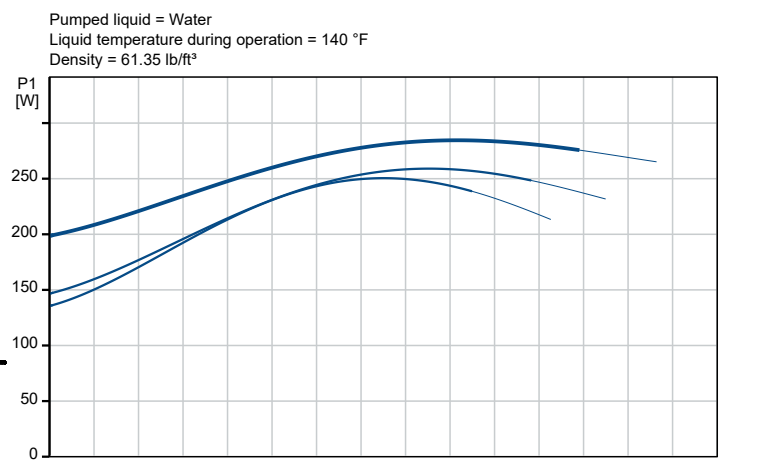

96402713 UPS 32-80 F B 60 Hz

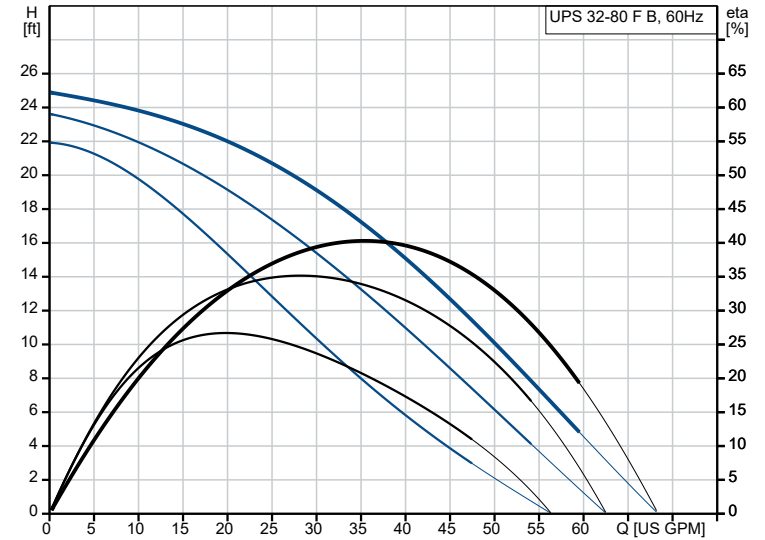