

Municipal Product Catalogue



www.ipexna.com

ISSUE DATE: APRIL 2016

- Pressure Piping Systems
- Water Service Systems
- Sewer Piping Systems
- Specialty Municipal Products

IPEX
Committed to Excellence

We build tough products for tough environments.®

Q-Line®

TEMPEST®

BIONAX®

Ultra-Rib®

IPEX FUSIBLE™

Ultra-X2®

LifeSaver®

Philmac® 3G®

CYCLETOUGH®

Vortex Flow®



20

02



Committed to EXCELLENCE

As a leader in thermoplastic piping systems for over 50 years, IPEX Inc. provides proven products that have withstood the rigours of time – from large diameter transmission pipelines to 3/4" house connections.

Our PVC water and sewer systems do not corrode so they maintain the strength and flexibility required to handle soil movement, high traffic loads and deep burial applications. At IPEX, we ensure our systems outperform our competitors with:

- Quality assurance testing that exceeds standards
- Custom-designed PVC compounds
- Third-party certification of pipe and fittings from organizations such as Canadian Standards Association, Factory Mutual, Underwriter's Laboratories and NSF





10



21



82

Contents

EASY SPECIFICATIONS

01 ▶ PRESSURE PIPING SYSTEMS

- Blue Brute Pipe
- Blue Brute Fittings
- Bionax PVCO Pipe
- Bionax SR Pipe
- IPEX Centurion
- IPEX Fusible
- TerraBrute CR
- CycleTough

33 ▶ WATER SERVICE SYSTEMS

- Blue904
- Q-Line
- Gold 901
- Philmac 3G Compression Fittings

47 ▶ SEWER PIPING SYSTEMS

- Ring-Tite / Enviro-Tite
- Ultra-Rib
- Ultra-X2
- NovaForm PVC Liner
- Solvent Weld Sewer Fittings

79 ▶ SPECIALTY PRODUCTS

- Vortex Flow Inserts
- LifeSaver Manhole & Catchbasin Adjustment Units
- Storm Sewer Inlet Controls

89 ▶ IPEX PRODUCT OVERVIEW

- Industrial Products
- Plumbing & Mechanical Products

MUNICIPAL EASY SPEC

PRODUCT	PRESSURE RATING		SIZE RANGE		STANDARDS	APPLICATIONS
PRESSURE PIPING SYSTEMS						
Blue Brute® PVC Pipe (CIOD)	DR25 DR18 DR14	165 psi (1130 kPa) 235 psi (1620 kPa) 305 psi (2100 kPa)	4 - 12" 4 - 12" 4 - 12"	(100 - 300 mm) (100 - 300 mm) (100 - 300 mm)	CSA B137.3 certified AWWA C900 FM 1612 approved UL 1285 Listed NSF Std. 61 certified BNQ NQ 3624-250*	Municipal transmission mains Municipal distribution mains Sewer forcemains Fire lines Industrial process lines Irrigation piping
Blue Brute® Moulded PVC Fittings (CIOD)		235 psi (1620 kPa)	4 - 12"	(100 - 300 mm)	CSA B137.2 certified AWWA C900 FM 1612 approved UL 1285 Listed NSF Std. 61 certified BNQ NQ 3624-250*	Municipal transmission mains Municipal distribution mains Sewer forcemains Fire lines Industrial process lines Irrigation piping
Bionax® PVC Pipe (CIOD)	CIOD CIOD CIOD	235 psi (1 620 kPa) 235 psi (1 620 kPa) 165 psi (1 137 kPa)	4 - 12" 14 - 18" 14 - 18"	(100 - 300 mm) (350 - 450 mm) (350 - 450 mm)	CSA B137.3.1 certified CIOD AWWA C909, FM approved NSF Std. 14 certified NSF Std. 61 certified BNQ NQ 3660-950*	Municipal transmission mains Municipal distribution mains Sewer forcemains
Bionax® SR PVC Pipe (CIOD)	CIOD	235 psi (1 620 kPa)	6 - 12"	(150 - 300 mm)	CSA B137.3.1 certified CIOD AWWA C909, FM approved NSF Std. 14 certified NSF Std. 61 certified BNQ NQ 3660-950*	Municipal transmission, distribution and sewer mains in seismic sensitive areas
IPEX Centurion® PVC Pipe	SDR51 SDR41 SDR32.5 DR25 DR18 DR14	80 psi (550 kPa) 100 psi (690 kPa) 125 psi (860 kPa) 165 psi (1130 kPa) 235 psi (1620 kPa) 305 psi (2100 kPa)	24 - 60" 14 - 48" 14 - 42" 14 - 36" 14 - 24" 14 - 16"	(600 - 1500 mm) (350 - 1200 mm) (350 - 1050 mm) (350 - 900 mm) (350 - 600 mm) (350 - 400 mm)	CSA B137.3 certified AWWA C905 NSF Std. 61 certified BNQ NQ 3624-250*	Municipal transmission mains Sewer forcemains Irrigation piping Gravity sewer mains
IPEX Centurion Fabricated PVC Fittings (CIOD)		165 psi (1130 kPa) 235 psi (1620 kPa)	14 - 30"	(350 - 750 mm)	CSA B137.3 certified AWWA C905 NSF Std. 61 certified BNQ NQ 3624-250*	Municipal transmission mains Sewer forcemains Irrigation piping Gravity sewer mains
Fusible™ Brute Fused-Joint PVC Pipe (CIOD)	SDR41 SDR32.5 SDR26 DR25 SDR21 DR18 DR14	100 psi (690 kPa) 125 psi (860 kPa) 160 psi (1100 kPa) 165 psi (1130 kPa) 200 psi (1380 kPa) 235 psi (1620 kPa) 305 psi (2100 kPa)	4 - 24" (12.2 m lengths)	(100 - 600 mm)	CSA B137.3 certified AWWA C900 AWWA C905 NSF Std. 61 certified UL 1285 BNQ NQ 3624-250*	Municipal transmission mains Municipal distribution mains Sewer forcemains Reclaimed water piping Storm drains Irrigation piping Process and raw water lines
TerraBrute® CR Restrained-Joint PVC Pipe (CIOD)	DR18 DR14	235 psi (1620 kPa) 305 psi (2100 kPa)	8 - 12" 4 & 6"	(200 - 300 mm) (100 & 150 mm)	CSA B137.3 certified AWWA C900 NSF Std. 61 certified UL 1285 BNQ NQ 3624-250*	Horizontal directional drilling Pipe bursting Seismic zone piping Casing installations Steep slope pipelines
Cycle Tough® PVC Series Pipe (IPSOD)	SDR41 SDR32.5 SDR26 SDR21	100 psi (690 kPa) 125 psi (860 kPa) 160 psi (1100 kPa) 200 psi (1380 kPa)	4 - 24" 3 - 24" 1-1/2 - 24" 1-1/2 - 24"	(100 - 600 mm) (75 - 600 mm) (40 - 600 mm) (40 - 600 mm)	CSA B137.3 certified ASTM D2241 NSF Std. 61 certified	Potable water piping Sewer forcemains Reclaimed water piping Golf course irrigation piping Other irrigation piping Industrial piping
Cycle Tough® 4000 Moulded PVC Fittings (IPSOD)		200 psi (1380 kPa)	1-1/2 - 8"	(40 - 200 mm)	CSA B137.2 Certified 4000 psi HDB 200 psi Pressure Rating	Potable water systems Sewage force mains Golf course and other irrigation
Cycle Tough® 4000 Fabricated PVC Fittings (IPSOD)		160 psi (1100 kPa)	10 - 24"	(250 - 600 mm)	CSA B137.3 Certified	Potable water piping Sewer forcemains Reclaimed water piping Golf course irrigation piping Other irrigation piping Industrial piping

* For BNQ Standards, not all sizes, pressure ratings, and manufacturing facilities are included in certifications.

PRODUCT	PRESSURE RATING	SIZE RANGE	STANDARDS	APPLICATIONS
WATER SERVICE SYSTEMS				
Blue904™ SDR9 PEX Service Tubing (CTS)	160 psi @ 73.4°F (1100 kPa @ 23°C) 100 psi @ 180°F (690 kPa @ 82°C) 80 psi @ 200°F (550 kPa @ 93°C)	3/4 - 2" (20 - 50 mm)	CSA B137.5 certified AWWA C904 ASTM F876, ASTM F877, ASTM F2023 NSF Std. 14 certified NSF Std. 61 certified BNQ NQ 3660-950*	Municipal water service
Q-Line™ PE-AL-PE Service Tubing	200 psi @ 73.4°F (1380 kPa @ 23°C) 100 psi @ 180°F (690 kPa @ 82°C)	3/4 & 1" (20 & 25 mm)	CSA B137.9 certified AWWA C903 ASTM F1282 NSF Std. 14 certified NSF Std. 61 certified BNQ NQ 3660-950*	Municipal water service Reclaimed water
Gold 901™ PE Service Tubing (CTS)	200 psi @ 73°F (1380 kPa @ 23°C)	3/4 - 2" (20 - 50 mm)	CSA B137.1 certified NSF Std. 61 certified BNQ NQ 3660-950*	Municipal water service
SEWER PIPING SYSTEMS				
Ring-Tite® PVC Sewer Pipe (PSM)	DR35	4 - 60" (100 - 1500 mm)	CSA B182.2 certified ASTM D3034 ASTM F679 ASHTO M278 BNQ NQ 3624-130 & 3624-135*	Sanitary sewer Storm sewer Industrial effluent
Enviro-Tite® PVC Sewer Pipe (PSM)	DR35	4 - 15" (100 - 375 mm)	CSA B182.2 certified ASTM D1760 BNQ NQ 3624-130 & 3624-135*	Sanitary sewer Storm sewer Industrial effluent
Ring-Tite® Heavy Wall PVC Sewer Pipe (PSM)	DR28	4 - 6" (100 - 150 mm)	Certified to CSA B182.2 BNQ NQ 3624-130 & 3624-135*	Sanitary sewer laterals Storm sewer laterals Industrial effluent
Enviro-Tite® PVC Sewer Pipe (PSM)	DR28	4 - 6" (100 - 150 mm)	Certified to CSA B182.2 BNQ NQ 3624-130 & 3624-135*	Sanitary sewer laterals Storm sewer laterals Industrial effluent
Ring-Tite® Gasketed Sewer Fittings (PSM)		4 - 42" (100 - 1050 mm)	CSA B182.2 certified ASTM D3034 ASTM F679	Sanitary sewer Storm sewer Industrial effluent
IPEX Centurion® PVC Pipe (CIOD)	DR51 DR41	24 - 48" (600 - 1200 mm)	CSA B137.3 certified AWWA C905 BNQ NQ 3624-250*	Sanitary sewer Storm sewer Industrial effluent
Ultra-Rib® PVC Sewer Pipe (Open profile OD)		8 - 24" (200 - 600 mm)	CSA B182.4 certified ASTM F794 ASHTO M304	Sanitary sewer Storm sewer Highway / culvert
Ultra-Rib® PVC Sewer Fittings (Open profile OD)		8 - 24" (200 - 600 mm)	CSA B182.4 certified ASTM F794	Sanitary sewer Storm sewer Highway / culvert
Ultra-X2® PVC Sewer Fittings (Open profile OD)		30 & 36" (750 & 900mm)	CSA B182.4 ASTM F794	Storm sewer Highway / culvert
NovaForm™ PVC Liner	DR35	6 - 15" (150 - 350 mm)	ASTM F1871	Sewer Rehabilitation Culvert Rehabilitation

* For BNQ Standards, not all sizes, pressure ratings, and manufacturing facilities are included in certifications.

Why swim with all the other fish?




IPEX Municipal Water Systems...innovation at its best!

IPEX FUSIBLE™




FPVC
PRESSURE PIPE

BIONAX®

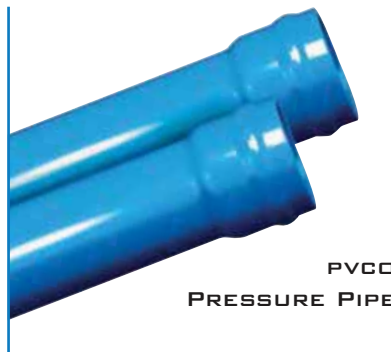

PVC0
PRESSURE PIPE

BLUE904®

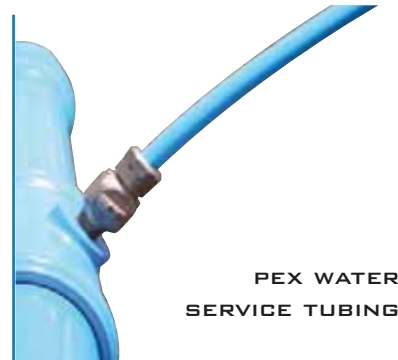

PEX WATER
SERVICE TUBING

- ✓ Available in CIOD & IPS sizes 4" to 24"
- ✓ Achieves higher flow rates
- ✓ Connects directly to existing PVC systems for material consistency
- ✓ Use standard CIOD or IPS fittings

- ✓ Molecularly Enhanced
- ✓ 2X Stronger
- ✓ 3X Tougher
- ✓ 2X More Flexible
- ✓ Code Compliant

- ✓ Corrosion Resistant
- ✓ Lightweight & Flexible
- ✓ Jobsite Safe
- ✓ Fewer Connections

Proven in tough North American climates for more than 50 years, IPEX AWWA municipal pressure pipe & fittings are manufactured from custom engineered PVC compounds to deliver superior strength and corrosion resistance, along with the ability to flex without damage – even under high traffic loads and in deep burial applications. IPEX AWWA PVC pressure pipe offers long-term performance unmatched by any other pipe material.

PRESSURE PIPE & FITTINGS



Blue Brute Pipe	2
Blue Brute Fittings	6
Bionax PVCO Pressure Pipe	10
Bionax SR Pressure Pipe	12
IPEX Centurion	14
IPEX Fusible	20
TerraBrute CR	22
CycleTough Piping Systems	26

BLUE BRUTE PIPE

4" - 12" (100mm - 300mm)

BLUE BRUTE®

Designed for municipal water applications, Blue Brute AWWA C900 pressure pipe delivers superior strength with corrosion-resistant performance and the ability to flex without damage. Made with a high-strength, high-impact PVC compound, Blue Brute pipes perform even under high traffic loads and deep burial conditions.

Manufactured with cast-iron outside diameters, Blue Brute is compatible with existing infrastructure of older iron pipes with no special transition fittings required. Blue Brute pressure pipe is hydrostatically proof tested to two times its pressure class/rating ensuring the integrity of every length of pipe that goes into the ground.

APPLICATIONS

- Municipal Water Systems
- Fire Lines
- Industrial Lines
- Forcemains
- Irrigation Lines

STANDARDS



AWWA
MEMBER



B137.3



ULC



3624-250



UL



FM



NSF
NSF-61

ADVANTAGES

- 1 Corrosion-Proof Performance**
IPEX Blue Brute systems are immune to corrosion from aggressive soils and galvanic action.
- 2 Superior Hydraulics**
The glass-like finish of PVC reduces friction losses and eliminates the tuberculation common in iron pipes. As a result, pumping costs are reduced and water quality is maintained.
- 3 Cast-Iron Outside Diameter (CIOD)**
Blue Brute systems are manufactured with a cast-iron outside diameter (CIOD). This is compatible with waterworks valves, appurtenances and restrainers.
- 4 Bottle-tight Joints, Removable Gaskets**
IPEX's patented gasket system not only withstands many times the rated system pressure, but also withstands full vacuum pressures. The removable gasket system allows special oil-resistant (nitrile) gaskets to be easily installed when working in contaminated soils.
- 5 Third-party Certification**
All IPEX municipal systems are third-party certified as applicable. In addition, IPEX Blue Brute systems have Factory Mutual approval and Underwriter's Laboratories (ULI and ULC) listings.



DID YOU KNOW?

Each piece of Blue Brute is hydrostatically tested to 2 times its pressure class, ensuring excellent performance in the field.

2

BLUE BRUTE PIPE



CONSERVATIVE DESIGN

The pressure class/rating is extremely conservative. For example, for DR18 pipe the pressure capacity is 235 psi (1620 kPa), but the minimum burst pressure is 755 psi (5210 kPa).

Dimension Ratio	AWWA Pressure Class	CSA Pressure Rating
14	305	305
18	235	235
25	165	165



SHORT FORM SPECIFICATIONS

GENERAL

Blue Brute pipe shall be certified to CSA B137.3 "Rigid Polyvinyl Chloride PVC Pipe for Pressure Applications" and shall conform to AWWA C900 "Polyvinyl Chloride (PVC) Pressure Pipe, 4" – 12" for Water Transmission and Distribution." Blue Brute DR25 pipe shall have a pressure class/rating of 1120 kPa (165 psi). DR18 pipe shall have a pressure class/rating of 1620 kPa (235 psi). DR14 pipe shall have a pressure class/rating of 2100 kPa (305 psi).


MATERIAL

Blue Brute pipe shall be made from PVC compound conforming to ASTM D1784 cell class 12454B.

PRODUCT

Pipe shall be suitable for use at maximum hydrostatic working pressure equal to the pressure class/rating at 23°C (73°F). Laying lengths shall be 6.1 metres (20 feet). Pipe shall have cast-iron outside diameters. Each length of pipe must be proof-tested at two times the pressure class.

JOINING



The gasket shall be carefully fitted to the bell groove if not already factory installed. Both bell and spigot shall be clean and free of debris before approved lubricant is applied. The pipe and/or fittings shall be joined by push-fitting bell-and-spigot joint to the depth line marked on the spigot. When pipe has

been cut in the field, the end shall be made square and beveled to a 15° chamfer. All insertion lines should be re-drawn, according to the IPEX Pressure Pipe Installation Guide.

Blue Brute fittings shall conform to AWWA C907 "Polyvinyl Chloride (PVC) Pressure Fittings for Water (4" through 12")" and be certified to CSA B137.2 "PVC Injection Moulded Gasketed Fittings for Pressure Applications." They shall also be UL Listed and FM approved.




FABRICATED FITTINGS

Fabricated fittings shall be made from segments of AWWA C900 PVC pipe. Segments are bonded together and may be over-wrapped with fibreglass-reinforced polyester. The pressure class must match the pipe. The fittings must meet the requirements of CSA B137.3.

PRODUCT SELECTION CHART

Length: 6.1 metres | Colour: Blue



Capped PVC Pressure Pipe

Class/Rating 165
CIOD DR 25

Class/Rating 235
CIOD DR 18


Class/Rating 305
CIOD DR 14

	Size		Product Code	Avg. ID		Min. Wall Thickness		Avg. OD	
	in	mm		in	mm	in	mm	in	mm
	4	100	070104	4.42	112	0.192	5	4.80	122
	6	150	070106	6.35	161	0.276	7	6.90	175
	8	200	070108	8.33	212	0.362	9	9.05	230
	10	250	070110	10.21	260	0.444	11	11.10	282
	12	300	070112	12.15	309	0.527	13	13.20	335
	4	100	070514	4.27	108	0.267	7	4.80	122
	6	150	070516	6.13	155	0.383	10	6.90	175
	8	200	070518	8.05	204	0.502	13	9.05	230
	10	250	070520	9.87	250	0.616	16	11.10	282
	12	300	070522	11.73	297	0.733	19	13.20	335
	4	100	070414	4.11	104	0.343	9	4.80	122
	6	150	070416	5.91	149	0.493	13	6.90	175
	8	200	070418	7.76	198	0.646	16	9.05	230
	10	250	070420	9.51	242	0.793	20	11.10	282
	12	300	070422	11.31	287	0.943	24	13.2	335

IPEX TECHNICAL MANUALS available at www.ipexna.com



Obtaining the most up-to-date technical information has never been easier with our innovative **ON-LINE MANUALS**

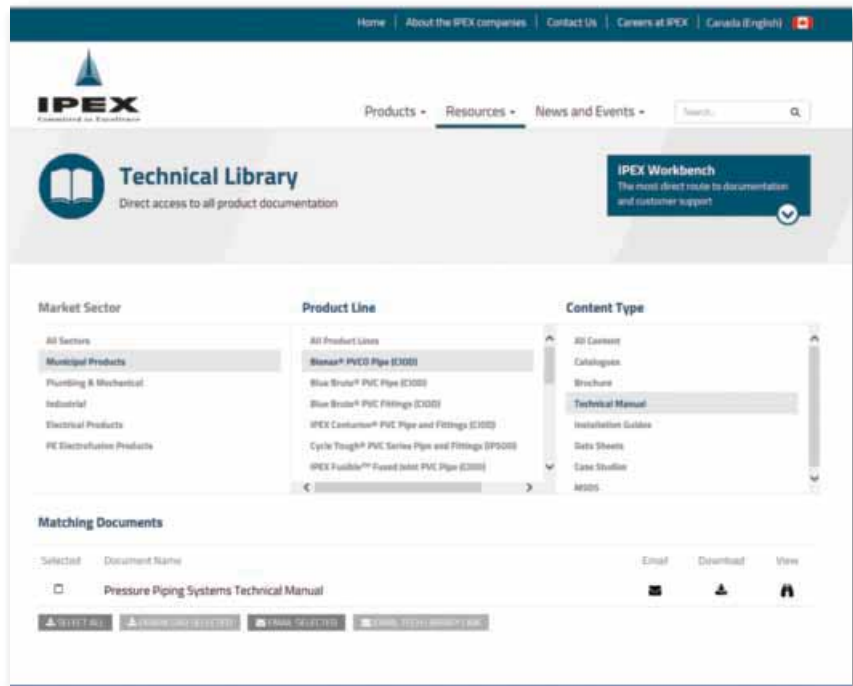

WHAT YOU CAN DO



Zoom to specific paragraph or chart for easy reading



Download as PDFs



Search document for key words



Environmentally Friendly!



Save and email clippings for ultimate convenience



Visit www.ipexna.com
& check it out!

BLUE BRUTE FITTINGS

Blue Brute Fittings 4" - 12" (100mm - 300mm)
IPEX Centurion Fittings 14" - 24" (350mm - 600mm)

BLUE BRUTE

Blue Brute fittings are injection molded and are even tougher than the pipe. Blue Brute fittings have a wall thickness 25% greater than DR18 pipe, and some custom-made fabricated fittings are wrapped with a tough layer of fiberglass for extra protection.

APPLICATIONS

- Municipal Water Systems
- Fire Lines
- Industrial Lines
- Forcemains
- Irrigation Lines

STANDARDS




ADVANTAGES

- 1 Corrosion-Proof Performance**
Blue Brute systems are immune to corrosion from aggressive soils and galvanic action.
- 2 Superior Hydraulics**
The glass-like finish of PVC reduces friction losses and eliminates the tuberculation common in iron pipes. As a result, pumping costs are reduced and water quality is maintained.
- 3 Strength**
A thicker bell results in a more robust fitting.
- 4 Gasket Options**
All Blue Brute fittings are shipped with standard gaskets that accept cast-iron-sized PVC pipe. Transition gaskets for IPS-sized pipe are an option for all sizes. For applications where fittings must be buried in soil with hydrocarbon contamination, Nitrile gaskets are available.
- 5 Saves Time & Money**
A consistent O.D. for each size simplifies the restraint selection. Each fitting is labeled with the O.D. information for easy identification and restraint selection.



PRODUCT SELECTION CHART - PC/PR 235 psi (1620 kPa)



Bell OD for Joint Restraint Selection

Size	Min.	Max.
4"	5.44"	5.61"
6"	7.84"	8.03"
8"	10.29"	10.55"
10"	12.69"	12.96"
12"	15.07"	15.46"



11-1/4° Elbow B x B




Dimension	Product Code	
	inches	mm
4	100	273104
6	150	073091
8	200	073092
* 10	250	273093
* 12	300	273094

22-1/2° Elbow B x B




4	100	073105
6	150	073106
8	200	073107
10	250	073108
12	300	073109

45° Elbow B x B



4	100	073120
6	150	073121
8	200	073122
10	250	073123
12	300	073124

90° Elbow B x B



4	100	073150
6	150	073151
8	200	073152
10	250	373012
12	300	373013

DR18, 5° CIOD Bend




6	150	273076
8	200	273077
* 10	250	273078
* 12	300	273079

* Denotes Fabricated Fitting

PRODUCT SELECTION CHART - PC/PR 235 PSI (1620 KPA)


	Dimension		Product Code
	inches	mm	

Tee B x B x B



4 x 4 x 4	100 x 100 x 100	073285
6 x 6 x 4	150 x 150 x 100	073241
6 x 6 x 6	150 x 150 x 150	073286
8 x 8 x 4	200 x 200 x 100	073242
8 x 8 x 6	200 x 200 x 150	073243
8 x 8 x 8	200 x 200 x 200	073287
10 x 10 x 4	250 x 250 x 100	273239
10 x 10 x 6	250 x 250 x 150	273244
10 x 10 x 8	250 x 250 x 200	273250
10 x 10 x 10	250 x 250 x 250	273288
12 x 12 x 4	300 x 300 x 100	273727
12 x 12 x 6	300 x 300 x 150	273245
12 x 12 x 8	300 x 300 x 200	273246
12 x 12 x 10	300 x 300 x 250	273247
12 x 12 x 12	300 x 300 x 300	273289

Hydrant Tee B x B x B



6 x 6 x 6	150 x 150 x 150	373011
8 x 8 x 8	200 x 200 x 150	373010
10 x 10 x 6	250 x 250 x 150	273989
12 x 12 x 6	300 x 300 x 150	273070

Reducer (Bell x Spigot)

6 x 4	150 x 100	073211
8 x 6	200 x 150	073212
10 x 8	250 x 200	273213
12 x 10	300 x 250	073214

Coupling with Stop B x B




4	100	073030
6	150	073031
8	200	073032
* 10	250	273532
* 12	300	273533

* One-piece machined coupling. Not UL Listed.
Note: 3/4" (20mm) Taps to 2" (50mm).
Taps: AWWA Thread

	Dimension		Product Code
	inches	mm	

Repair Coupling B x B



4	100	073404
6	150	073406
8	200	073408
* 10	250	273529
* 12	300	273530

* One-piece machined coupling. Not UL Listed.

Single Tapped Coupling (AWWA Thread)



4 x 4 x 3/4	100 x 100 x 20	073267
4 x 4 x 1	100 x 100 x 25	073268
6 x 6 x 3/4	150 x 150 x 20	073256
6 x 6 x 1	150 x 150 x 25	073257
6 x 6 x 1-1/4	150 x 150 x 32	073144
6 x 6 x 1-1/2	150 x 150 x 40	273300
8 x 8 x 3/4	200 x 200 x 20	073259
8 x 8 x 1	200 x 200 x 25	073260
8 x 8 x 1-1/4	200 x 200 x 32	073147
8 x 8 x 1-1/2	200 x 200 x 40	273265
8 x 8 x 2	200 x 200 x 50	073266
* 10 x 10 x 3/4	250 x 250 x 20	273535
* 10 x 10 x 1	250 x 250 x 25	273537
* 10 x 10 x 1-1/2	250 x 250 x 40	273044
* 10 x 10 x 2	250 x 250 x 50	273045
* 12 x 12 x 3/4	300 x 300 x 20	273536
* 12 x 12 x 1	300 x 300 x 25	273538
* 12 x 12 x 1-1/2	300 x 300 x 40	273046
* 12 x 12 x 2	300 x 300 x 50	273048

* One-piece machined coupling. Not UL Listed.
Note: 3/4" (20mm) Taps to 2" (50mm).
Taps: AWWA Thread

Double Tapped Coupling (AWWA Thread)




6 x 6 x 3/4 x 3/4	150 x 150 x 20 x 20	073305
6 x 6 x 1 x 1	150 x 150 x 25 x 25	073308
8 x 8 x 3/4 x 3/4	200 x 200 x 20 x 20	073290
8 x 8 x 1 x 1	200 x 200 x 25 x 25	073307

Note: 3/4" (20mm) Taps to 2" (50mm).
Taps: AWWA Thread

PRODUCT SELECTION CHART - PC/PR 235 PSI (1620 KPA)


	Dimension		Product Code
	inches	mm	

High Deflection Couplings



10	250	273526
12	300	273527

Reducer Coupling B x B



* 6 x 4	150 x 100	273226
* 8 x 6	200 x 150	273227
* 10 x 6	250 x 150	273228
* 10 x 8	250 x 200	273229
* 12 x 8	300 x 200	273231
* 12 x 10	300 x 250	273232

Plug Plain End




4	100	073180
6	150	073181
8	200	073182
10	250	073183
12	300	073184

Tapped Plug (I.P.S. Threads)



4 x 3/4	100 x 20	273192
4 x 1	100 x 25	073193
4 x 1-1/2	100 x 40	073194
4 x 2	100 x 50	273195
6 x 3/4	150 x 20	273199
6 x 1	150 x 25	273200
6 x 1-1/2	150 x 40	273201
6 x 2	150 x 50	273196
8 x 3/4	200 x 20	073203
8 x 1	200 x 25	073204
8 x 1-1/2	200 x 40	073197
8 x 2	200 x 50	273198

Cast Iron Size x I.P.S. Transition Gasket




4	100	073655
6	150	073611
8	200	073656

Gasket drawing is for information only. Actual gasket may be different.

	Dimension		Product Code
	inches	mm	


C900 Bell x Flange Adapter



* 4	100	273015
* 6	150	273016
* 8	200	273017
* 10	250	273018
* 12	300	273019


* Fabricated fitting – Fibreglass reinforced

C900 (Spigot) x I.P.S. (Bell) Adapter



* 4	100	273346
* 6	150	273347

SBR Gasket



4	100	072344
6	150	072346
8	200	273348
10	250	072350
12	300	072352

Gasket drawing is for information only. Actual gasket may be different.

Nitrile Gasket (Oil Resistant)

4	100	072924
6	150	072926
8	200	072928
10	250	072930
12	300	072932

EPDM Gasket

4	100	272048
6	150	272011
8	200	272039
10	250	272040
12	300	272012

BIONAX PVCO PRESSURE PIPE

4" - 18" (100mm - 450mm)

BIONAX®

Imagine a pipe with all the benefits associated with conventional PVC, yet dramatically stronger and more impact resistant.

Bionax is a molecularly-enhanced PVC pipe designed for water mains, sewage forcemains and industrial process piping. Made from biaxially-oriented PVC material, Bionax has almost double the strength of conventional PVC and three times the impact absorption capability. Using a revolutionary new orientation process, this high-tech process orients the PVC molecules both in the axial and circumferential directions (biaxial orientation). The result is a pipe with enhanced toughness and flexibility.

Bionax is specially engineered to withstand the rigors of today's installations. With less construction inspection and less regular maintenance, the market is calling for a pipe that is more robust, stronger and easier to install. Bionax delivers on all three counts.

Biaxially Oriented PVC Pipe for Municipal Applications

Bionax's biaxial orientation dramatically enhances the pipe properties that are important to municipal designers:

- Larger internal diameters increase flow rates and reduce pumping costs
- Higher cyclic fatigue resistance for forcemain and irrigation applications
- Reduced bend radius when compared to standard PVC pipe

FEATURES & BENEFITS

- 1 Circumferential Tensile Strength**
Bionax has almost double the tensile strength of conventional PVC (12,100 psi vs. 7,000 psi). This higher strength results in larger inside diameters, improving the hydraulics of the pipe.
- 2 Impact Strength**
Bionax provides more than triple the impact strength of standard PVC pipe. PVCO pipe can withstand extreme jobsite conditions with no damage.
- 3 Crack Resistance**
PVCO's laminar structure prevents crack propagation, preventing damage to the pipe.
- 4 Longitudinal Tensile Strength**
Bionax has higher tensile strength in the axial direction, which allows a tighter bend radius than other materials.
- 5 Certification**
Bionax is third party certified to CSA B137.3.1 and AWWA C909.

APPLICATIONS

- Water Mains
- Sewage Forcemains
- Industrial Process Piping

STANDARDS



D1784
D3139
F477
F1483



B137.3.1



NSF 14
NSF 61



SIZES & RATINGS CIOD PIPE

Pressure Class Rating at
73°F / 23°C for 165 psi / 1150 kPa

Pipe Size		OD		Product Code
inches	mm	inches	mm	
14	350	15.30	389	120006 #
16	400	17.40	442	120003 #
18	450	19.50	495	120005 #
20	500	21.60	549	*
24	600	25.80	655	*
30	700	32.00	813	*

Please validate Product Code before placing an order.

Pressure Class Rating at
73°F / 23°C for 235 psi / 1620 kPa

Pipe Size		OD		Product Code
inches	mm	inches	mm	
4	100	4.80	122	118000
6	150	6.90	175	118001
8	200	9.05	230	118002
10	250	11.10	282	118003
12	300	13.20	335	118004
14	350	15.30	389	120001 #
16	400	17.40	442	120002 #
18	450	19.50	495	120004 #
20	500	21.60	549	*
24	600	25.80	655	*
30	700	32.00	813	*

Please validate Product Code before placing an order.

Pressure Class Rating at
73°F / 23°C for 305 psi / 2100 kPa

Pipe Size		OD		Product Code
inches	mm	inches	mm	
14	350	15.30	389	*
16	400	17.40	442	*
18	450	19.50	495	*
20	500	21.60	549	*
24	600	25.80	655	*
30	700	32.00	813	*

* coming soon!



DID YOU KNOW?

Every length of CIOD Bionax is hydrotested to AWWA standards before being shipped. In fact, IPEX is the only manufacturer to have third-party certification (by NSF) to meet the stringent AWWA standards and by CSA to meet the CSA Standards.

SHORT FORM SPECIFICATIONS

SCOPE

This specification provides the requirements for molecularly oriented polyvinyl chloride (PVCO) pipe for potable-water systems and other pressure-pipe applications.

MATERIALS

- PVCO pipe shall be manufactured from rigid polyvinyl chloride (PVC) compound meeting the requirements of ASTM D1784 cell class 12454B.
- Gaskets shall meet ASTM F477 for high-head applications.

HYDROSTATIC DESIGN BASIS


- Starting-stock PVC pipe shall have a hydrostatic design basis (HDB) of 4000 psi.
- Finished PVCO pipe shall have an HDB of 7100 psi.

PIPE

- Pipe shall be biaxially oriented (molecularly oriented in hoop and axial directions).
- Pipe shall be produced with cast-iron-pipe outside diameters (CIOD) in all sizes.
- Pipe shall be joined by integral-bell gasketed joints conforming to ASTM D3139.
- Pipe spigot ends shall be chamfered by the manufacturer.
- Pipe ends shall be capped at the production facility prior to storage and shipping.
- Pipe shall be color-coloured blue.

CIOD CERTIFICATIONS

- PVC compound shall be CSA-certified to ASTM D1784 cell-class 12454B.
- PVCO pipe shall be CSA-certified to CSA Standard B137.3.1 and third-party certified to NSF Standard 14 and AWWA Standard C909.
- PVCO pipe joints shall be third-party certified to ASTM D3139.



STANDARDS

PVCO pipe shall conform to the following standards:

- ANSI/NSF Standard 14: Plastic Piping System Components and Related Materials
- ANSI/NSF Standard 61: Drinking Water System Components – Health Effects
- ASTM D1784: Rigid Polyvinyl Chloride (PVC) Compounds
- ASTM D3139: Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals
- ASTM F477: Elastomeric Seals (Gaskets) for Joining Plastic Pipe
- AWWA C909-09: Molecularly Oriented Polyvinyl Chloride (PVCO) Pressure Pipe, 4 Inch Through 24 Inch (100 mm Through 600 mm)
- CSA B137.3.1: Molecularly oriented polyvinyl chloride (PVCO) pipe for pressure applications

BIONAX SR SEISMIC WATER PIPE

6" - 12" (150mm - 300mm)



Bionax SR™ – Seismic Water Pipe - combines the same strength, toughness and flexibility as standard Bionax pipe with the enhanced seismic-resistance benefits of an extended bell. The result is a municipal water transmission and distribution system which performs better than any pipe product available today. Bionax SR can absorb lateral ground strain of seismic events and provides other performance benefits including product consistency, industry standard dimensions and corrosion-resistant attributes for a North American jobsite.

The biaxial orientation and the extended bell of Bionax SR pipe provide excellent pipe and joint flexibility—precisely what is required from a water pipe if it is to remain intact after a seismic event.

APPLICATIONS

- Municipal Water Systems
- Fire Lines
- Industrial Lines
- Foremain

STANDARDS



FEATURES & BENEFITS

1 Circumferential Tensile Strength

Bionax SR has almost double the tensile strength of conventional PVC (12,100 psi vs. 7,000 psi). This higher strength results in larger inside diameters, improving the hydraulics of the pipe.

2 Impact Strength

Bionax SR provides more than triple the impact strength of standard PVC pipe. PVC pipe can withstand extreme jobsite conditions with no damage.

3 Crack Resistance

PVC's laminar structure prevents crack propagation, preventing damage to the pipe.

4 Longitudinal Tensile Strength

Bionax SR has higher tensile strength in the axial direction, which allows a tighter bend radius than other materials.


5 Light-weight

e.g. 300mm PC 235 psi pipe = 236 lbs.

6 Corrosion-proof & Consistent O.D.

7 Certification

Bionax SR is third party certified to CSA B137.3.1 and AWWA C909.

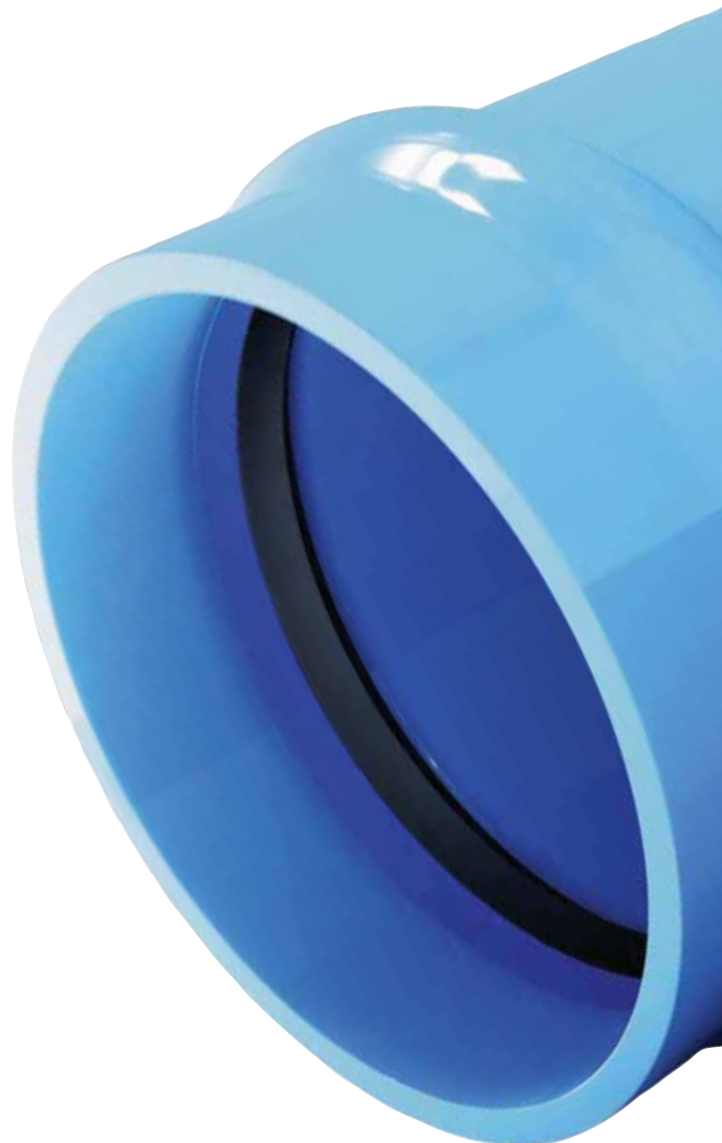

SIZES & RATINGS CIOD PIPE

Pressure/Class Rating at **73°F / 23°C** for **235 psi / 1620 kPa**

in.	Size	Average OD		Min. Wall Thickness		Average ID		Insertion Depth			
	mm	inches	inches	inches	inches	inches	inches	Minimum	Maximum	Minimum	Maximum
6	150	6.90	175	0.221	5.62	6.44	163	6.6	167	7.6	192
8	200	9.05	230	0.290	7.36	8.44	214	8.1	207	9.1	232
10	250	11.10	282	0.356	9.03	10.35	263	8.5	217	9.5	242
12	300	13.2	335	0.423	10.74	12.31	313	10.9	277	11.9	302

SHORT FORM SPECIFICATIONS

SCOPE

This specification provides the requirements for Bionax SR molecularly oriented polyvi-nyl chloride (PVCO) pipe for potable-water systems and other pressure-pipe applications. Bionax SR Gasketed cast-iron-pipe outside diameter (CIOD) Pressure pipe is available in the following pressure classes and nominal sizes:

- PC 235psi 6" through 12" (150mm – 300mm)

MATERIALS

- Bionax SR pipe shall be manufactured from rigid polyvinyl chloride (PVC) compound meeting the requirements of ASTM D1784 cell class 12454.
- Bionax SR gaskets shall meet ASTM F477 for high-head applications

HYDROSTATIC DESIGN BASIS

- Starting-stock for Bionax SR shall have a hydrostatic design basis (HDB) of 4000 psi and finished pipe shall have an HDB of 7100 psi as determined by testing in accordance with ASTM D1598, with data evaluated in accordance with ASTM D2837.

PIPE

- Bionax SR shall be manufactured with cast-iron-pipe outside diameters (CIOD) in all sizes. Pipe walls shall meet minimum thickness requirements for AWWA C909 and CSA B137.3.1. Laying lengths shall be 6.1 meters (20 feet). Pipe shall be joined by means of integral-bell elastomeric-gasket joints conforming to ASTM D3139. Spigot ends shall be chamfered by the manufacturer. Pipe ends shall be capped at the production facility prior to storage and shipping.

STANDARDS

PVCO pipe shall conform to the following standards:

- ANSI/NSF 14 Plastics Piping System Components and Related Materials
- ANSI/NSF Standard 61: Drinking Water System Components – Health Effects
- ASTM F1483 Standard Specification for Oriented Poly(Vinylchloride), PVCO, Pressure Pipe (PR 200psi)
- AWWA C909: Molecularly Oriented Polyvinyl Chloride (PVCO) Pressure Pipe, 4 inch through 24 inch (100 mm through 600 mm) for Water Distribution
- BNQ NQ 3660-950 Safety of Products and Materials in Contact with Drinking Water
- CSA B137.3.1 Molecularly Oriented Polyvinylchloride (PVCO) Pipe for Pressure Applications (PR 1620kPa)
- FM 1612 Polyvinyl Chloride (PVC) Pipe and Fittings for Underground Fire Protection Services (PC 150psi, 4" through 12")

FITTINGS

Bionax SR piping systems shall include IPEX Blue Brute molded and fabricated fittings.

LUBRICANT

Pipe must be assembled with IPEX water-soluble lubricant listed to NSF Standard 61.

COLOR CODING

CIOD pipe shall be color coded blue.

DID YOU KNOW?

In cities across North America, aging and corroding water pipe networks suffer pipe bursts daily. In the event of an earthquake the occurrence is multiplied to the extreme. For example, in 1994 when the Northridge Earthquake occurred in the San Fernando Valley, California, 15 seconds of the earth shaking caused 1,100 pipe bursts—more than a typical year's worth and leaving many residents without water for over two weeks.

IPEX CENTURION PRESSURE PIPING SYSTEMS

14" - 60" (350mm - 1500mm)

IPEX CENTURION®

IPEX Centurion extends the corrosion-free benefits of Blue Brute to larger diameters of pipe and new applications. The versatility and ease of installation of IPEX Centurion is unmatched – costly and difficult to install corrosion protection can be eliminated. In addition, unlike HDPE or concrete pressure pipe, every length of IPEX Centurion is tested to double its pressure rating.


ADVANTAGES

- 1 Corrosion-Proof Performance**
IPEX Centurion systems are immune to corrosion from aggressive soils and galvanic action.
- 2 Superior Hydraulics**
The glass-like finish of PVC reduces friction losses and eliminates the tuberculation common in iron pipes. As a result, pumping costs are reduced and water quality is maintained.
- 3 Cast Iron Outside Diameter (CIOD)**
IPEX Centurion systems are manufactured with a cast iron outside diameter (CIOD). This is compatible with waterworks valves, appurtenances and restrainers.
- 4 Bottle-tight Joints, Removable Gaskets**
IPEX's patented gasket system not only withstands many times the rated system pressure, but also withstands full vacuum pressures. The removable gasket system allows special oil-resistant (nitrile) gaskets to be easily installed when working in contaminated soils.
- 5 Centurion for Gravity Applications**
With its pressure rated joints and non-corroding construction, IPEX Centurion is a natural choice for gravity flow lines.
- 6 Third-party Certification**
All IPEX municipal systems are third-party certified as applicable including Factory Mutual approval and Underwriter's Laboratories (ULI and ULC) listings.

APPLICATIONS

- Water Transmission Lines
- Force mains
- Gravity Lines
- Irrigation
- Industrial Lines

STANDARDS

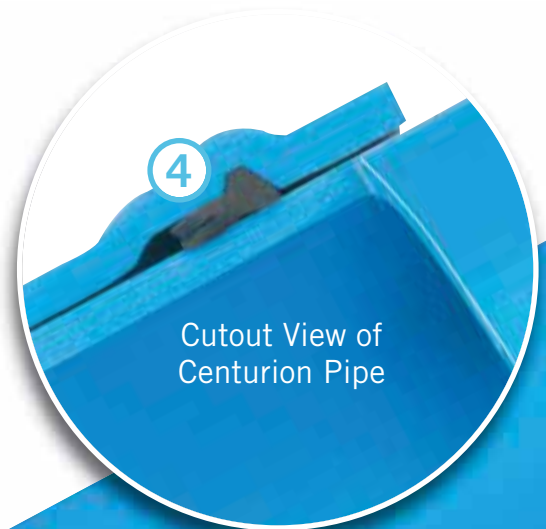

PRESSURE CAPACITY

IPEX Centurion can withstand extremely high short-term pressures in addition to lower levels of long-term pressure. As a result CSA B137.3 and AWWA C905 include both long-term pressure capacity (pressure rating PR or pressure class PC) and short-term capacity (short-term rating STR).

SDR	Short Term Rating STR psi	Long Term Rating PC/PR psi
51	128	80
41	160	100
32.5	200	125
25	264	165
18	376	235
14	488	305

STANDARDS

AWWA C905, CSA B137.3, NQ 3624-250, NSF-61

Factory Mutual FM 1612:

DR18 is FM approved to 500mm diameter (20")

Underwriter's Laboratories UL 1285:

DR18 is listed to 600mm diameter (24")

DR25 is listed to 750mm diameter (30")

SHORT FORM SPECIFICATIONS

GENERAL



Pipe must conform to AWWA C905 and be certified to CSA B137.3 "Rigid Poly (Vinyl Chloride) (PVC) Pipe for Pressure Applications." DR51, 41, 32.5, 25, 18, and 14 pipe must have the following pressure class/rating: 80 psi (550 kPa), 100 psi (690 kPa), 125 psi (860 kPa), 165 psi (1 140 kPa), 235 psi (1 620 kPa) and 305 psi (2 100 kPa). For pressure applications, each length of pipe must be hydro-tested at twice the class/rating and a short-term pressure test must be conducted once per production run. Pipe to be IPEX Centurion or approved equal.

FABRICATED FITTINGS

Fabricated fittings shall be made from segments of AWWA C905 pipe that are butt fused or bonded together. Some fittings are over-wrapped with fiberglass-reinforced polyester. The fittings must always meet the pressure rating of the pipe system.



COMPATIBILITY

IPEX Centurion is manufactured with a cast iron outside diameter (CIOD) so it is compatible with much of the existing older infrastructure of iron pipes. In addition, IPEX Centurion can be field cut, which means unexpected changes in the field can be accommodated quickly, without having to wait for new shop drawings.

IPEX Centurion Fittings are manufactured using sections of AWWA C905 pipe that are fused or bonded together. Some fittings are overwrapped with a layer of fibre reinforced plastic (FRP). While IPEX Centurion is compatible with iron fittings, IPEX recommends the use of IPEX Centurion fittings exclusively with IPEX Centurion pipe.

IPEX CENTURION™ LARGE DIAMETER CIOD PVC PRESSURE PIPE



PC/PR 80 (SDR51)

Size	Product Code		Avg. ID		Min. Wall Thickness		Avg. OD	
	in	mm	in	mm	in	mm	in	mm
18	450	071004	18.7	475.9	0.38	9.7	19.5	495.3
20	500	071520	20.8	527.0	0.42	10.8	21.6	548.6
24	600	071524	24.8	629.6	0.50	12.9	25.8	655.3
30	750	071526	30.7	780.9	0.63	15.9	32.0	812.8
36	900	071528	36.8	934.7	0.75	19.1	38.3	972.8
42	1050	071000	42.6	1082.8	0.87	22.2	44.5	1130.3
48	1200	071135	48.7	1236.2	1.00	25.3	50.8	1290.3
54	1350	071043	55.3	1404.6	1.13	28.7	57.6	1462.0
60	1500	071044	59.2	1503.2	1.21	30.7	61.6	1564.9

PC/PR 100 (SDR41)

14	350	071414	14.6	369.7	0.37	9.5	15.3	388.6
16	400	071416	16.6	420.4	0.43	10.8	17.4	442.0
18	450	071418	18.5	471.1	0.48	12.1	19.5	495.3
20	500	071420	20.5	521.8	0.53	13.4	21.6	548.6
24	600	071424	24.5	623.3	0.63	16.0	25.8	655.3
30	750	071426	30.4	773.2	0.78	19.8	32.0	812.8
36	900	071428	36.4	925.3	0.93	23.7	38.3	972.8
42	1050	071140	42.2	1071.4	1.09	27.5	44.5	1130.3
48	1200	071223	48.2	1223.0	1.24	31.5	50.8	1290.3
54	1350	071045	54.8	1391.9	1.40	35.7	57.6	1462.0
60	1500	071046	58.6	1488.4	1.50	38.1	61.6	1564.9

PC/PR 125 (SDR32.5)

14	350	-	14.4	364.7	0.47	12.0	15.3	388.6
16	400	071316	16.3	414.5	0.54	13.6	17.4	442.0
18	450	071317	18.3	464.8	0.60	15.2	19.5	495.3
20	500	071320	20.3	514.6	0.67	16.9	21.6	548.6
24	600	071324	24.2	615.0	0.80	20.2	25.8	655.3
30	750	071326	30.0	762.8	0.98	25.0	32.0	812.8
36	900	071328	35.9	912.9	1.18	29.9	38.3	972.8
42	1050	071219	41.6	1056.6	1.37	34.8	44.5	1130.3
48	1200	-	47.7*	1211.1*	1.56*	39.6*	50.8*	1290.3*
54	1350	-	54.1*	1374.1*	1.77*	45.0*	57.6*	1462.0*

PC/PR 165 (DR25)

14	350	071114	14.1	357.5	0.61	15.6	15.3	388.6
16	400	071116	16.0	406.6	0.70	17.7	17.4	442.0
18	450	071118	17.9	455.7	0.78	19.8	19.5	495.3
20	500	071124	19.9	504.7	0.86	22.0	21.6	548.6
24	600	071136	23.7	602.9	1.03	26.2	25.8	655.3
30	750	071144	29.4	747.8	1.28	32.5	32.0	812.8
36	900	071137	35.2	895.0	1.53	38.9	38.3	972.8
42	1050	-	40.9*	1039.9*	1.78*	45.2*	44.5*	1130.3*
48	1200	-	46.7*	1187.2*	2.03*	51.6*	50.8*	1290.3*

PC/PR 235 (DR18)

14	350	071214	13.6	345.4	0.85	21.6	15.3	388.6
16	400	071216	15.5	392.9	0.97	24.6	17.4	442.0
18	450	071218	17.3	440.3	1.08	27.5	19.5	495.3
20	500	071220	19.2	487.6	1.20	30.5	21.6	548.6
24	600	071224	22.9	582.5	1.43	36.4	25.8	655.3
30	750	071130	28.4	722.4	1.78	45.2	32.0	812.8
36	900	-	34.0*	863.6*	2.13*	54.1*	38.3*	972.8*
42	1050	-	39.6*	1004.8*	2.47*	62.8*	44.5*	1130.3*

PC/PR 305 (DR14)


14	350	-	13.1	333.0	1.09	27.8	15.3	388.6
16	400	070426	14.9	378.8	1.24	31.6	17.4	442.0

* coming soon!

IPEX CENTURION™ FABRICATED FITTINGS (CIOD), CLASS/PRESSURE RATING 165 PSI


	Dimension		Product Code
	inches	mm	

90° Bend




14	350	073709
16	400	073040
18	450	073710
20	500	073711
24	600	073712
30	750	073713

45° Bend




14	350	073140
16	400	073714
18	450	073715
20	500	073716
24	600	073160
30	750	073038

22-1/2° Bend




14	350	073717
16	400	073718
18	450	073719
20	500	073720
24	600	073161
30	750	073721

11-1/4° Bend



14	350	073722
16	400	073723
18	450	073724
20	500	073725
24	600	073162
30	750	073726


Tee



14	350	073733
16	400	073427
18	450	073747
20	500	073756
24	600	073766
30	750	073774

	Dimension		Product Code
	inches	mm	

Reducer Tee G x G x G




14 x 4	350 x 100	073728
14 x 6	350 x 150	073729
14 x 8	350 x 200	073730
14 x 10	350 x 250	073731
14 x 12	350 x 300	073732
16 x 4	400 x 100	073734
16 x 6	400 x 150	073735
16 x 8	400 x 200	073736
16 x 10	400 x 250	073737
16 x 12	400 x 300	073738
16 x 14	400 x 350	073739
18 x 4	450 x 100	073740
18 x 6	450 x 150	073741
18 x 8	450 x 200	073742
18 x 10	450 x 250	073743
18 x 12	450 x 300	073744
18 x 14	450 x 350	073745
18 x 16	450 x 400	073746
20 x 4	500 x 100	073748
20 x 6	500 x 150	073749
20 x 8	500 x 200	073750
20 x 10	500 x 250	073751
20 x 12	500 x 300	073752
20 x 14	500 x 350	073753
20 x 16	500 x 400	073754
20 x 18	500 x 450	073755
24 x 4	600 x 100	073757
24 x 6	600 x 150	073758
24 x 8	600 x 200	073759
24 x 10	600 x 250	073760
24 x 12	600 x 300	073761
24 x 14	600 x 350	073762
24 x 16	600 x 400	073763
24 x 18	600 x 450	073764
24 x 20	600 x 500	073765
30 x 4	750 x 100	073767
30 x 6	750 x 150	073011
30 x 8	750 x 200	073013
30 x 10	750 x 250	073768
30 x 12	750 x 300	073769
30 x 14	750 x 350	073770
30 x 16	750 x 400	073039
30 x 18	750 x 450	073771
30 x 20	750 x 500	073772
30 x 24	750 x 600	073773

IPEX CENTURION™ FABRICATED FITTINGS (CIOD), CLASS/PRESSURE RATING 165 PSI

Dimension		Product Code
inches	mm	


Dimension		Product Code
inches	mm	

Reducer Coupling G x G




14 x 4	350 x 100	073776
14 x 6	350 x 150	073777
14 x 8	350 x 200	073778
14 x 10	350 x 250	073779
14 x 12	350 x 300	073780
16 x 4	400 x 100	073781
16 x 6	400 x 150	073782
16 x 8	400 x 200	073783
16 x 10	400 x 250	073784
16 x 12	400 x 300	073785
16 x 14	400 x 350	073786
18 x 4	450 x 100	073787
18 x 6	450 x 150	073788
18 x 8	450 x 200	073789
18 x 10	450 x 250	073790
18 x 12	450 x 300	073791
18 x 14	450 x 350	073792
18 x 16	450 x 400	073793
20 x 4	500 x 100	073794
20 x 6	500 x 150	073795
20 x 8	500 x 200	073796
20 x 10	500 x 250	073797
20 x 12	500 x 300	073798
20 x 14	500 x 350	073799
20 x 16	500 x 400	073800
20 x 18	500 x 450	073801
24 x 4	600 x 100	073802
24 x 6	600 x 150	073803
24 x 8	600 x 200	073804
24 x 10	600 x 250	073805
24 x 12	600 x 300	073806
24 x 14	600 x 350	073807
24 x 16	600 x 400	073808
24 x 18	600 x 450	073809
24 x 20	600 x 500	073813
30 x 4	750 x 100	073814
30 x 6	750 x 150	073815
30 x 8	750 x 200	073816
30 x 10	750 x 250	073817
30 x 12	750 x 300	073818
30 x 14	750 x 350	073819
30 x 16	750 x 400	073820
30 x 18	750 x 450	073821
30 x 20	750 x 500	073822
30 x 24	750 x 600	073234

Repair Coupling



14	350	073883
16	400	073884
18	450	073885
20	500	073886
24	600	073887
30	750	073425

Stop Coupling




14	350	073890
16	400	073891
18	450	073892
20	500	073893
24	600	073163
30	750	073894

Cap



14	350	073895
16	400	073896
18	450	073897
20	500	073898
24	600	073899
30	750	073900

Cross




14	350	073837
16	400	073844
18	450	073852
20	500	073861
24	600	073871
30	750	073882

IPEX CENTURION™ FABRICATED FITTINGS (CIOD), CLASS/PRESSURE RATING 165 PSI

Dimension		Product Code
inches	mm	

Dimension		Product Code
inches	mm	

Reducer Cross G x G x G x G



14 x 4	350 x 100	073832	24 x 4	600 x 100	073862
14 x 6	350 x 150	073833	24 x 6	600 x 150	073863
14 x 8	350 x 200	073834	24 x 8	600 x 200	073864
14 x 10	350 x 250	073835	24 x 10	600 x 250	073865
14 x 12	350 x 300	073836	24 x 12	600 x 300	073866
16 x 4	400 x 100	073838	24 x 14	600 x 350	073867
16 x 6	400 x 150	073839	24 x 16	600 x 400	073868
16 x 8	400 x 200	073840	24 x 18	600 x 450	073869
16 x 10	400 x 250	073841	24 x 20	600 x 500	073870
16 x 12	400 x 300	073842	30 x 4	750 x 100	073872
16 x 14	400 x 350	073843	30 x 6	750 x 150	073873
18 x 4	450 x 100	073845	30 x 8	750 x 200	073874
18 x 6	450 x 150	073846	30 x 10	750 x 250	073875
18 x 8	450 x 200	073847	30 x 12	750 x 300	073876
18 x 10	450 x 250	073848	30 x 14	750 x 350	073877
18 x 12	450 x 300	073849	30 x 16	750 x 400	073878
18 x 14	450 x 350	073850	30 x 18	750 x 450	073879
18 x 16	450 x 400	073851	30 x 20	750 x 500	073880
20 x 4	500 x 100	073853	30 x 24	750 x 600	073881
20 x 6	500 x 150	073854			
20 x 8	500 x 200	073855			
20 x 10	500 x 250	073856			
20 x 12	500 x 300	073857			
20 x 14	500 x 350	073858			
20 x 16	500 x 400	073859			
20 x 18	500 x 450	073860			

IPEX FUSIBLE PIPE

12.2m (40 ft) lengths
CIOD: 100mm - 750mm (4" - 30")
IPS: 300mm - 750mm (12" - 30")

FUSIBLE BRUTE™ FUSIBLE SERIES™

IPEX has introduced new Fusible Brute™ and Fusible Series™ PVC pipes. By combining the mechanical properties of PVC with an innovative, patented butt fusion process, IPEX provides the only available method of installing a continuous, monolithic, fully restrained PVC pipe system. Capable of being used in a variety of trenchless or conventional direct bury applications, Fusible PVC™ pipe systems have been installed at numerous sites throughout the United States, Canada and Mexico for both pressure and non-pressure installations in the water and sewer industries.

With PVC's proven long service life, Fusible Brute (CIOD) and Fusible Series (IPS) pipes are available in sizes ranging from 100mm (4") to 750mm (30") with larger sizes in development. The proprietary PVC formulation, fusion process as well as our licensing and training program allow for the consistent, reliable fusion of Fusible Brute and Fusible Series pipes to create piping systems of unparalleled strength.

APPLICATIONS

- Water Mains
- Sanitary Sewers
- Process and Raw Water
- Reclaimed Water
- Storm Drains

STANDARDS



B137.3



MEMBER



12454



ADVANTAGES

- ✓ Greater pull force rating than HDPE.
- ✓ Greater pull force rating than other PVC systems.
- ✓ Lower installation costs versus HDPE due to lighter weight and reduced OD dimensions.
- ✓ Has excellent abrasion and scratch-resistant properties.
- ✓ Higher flow rates.
- ✓ Connects directly to existing PVC systems for material consistency.
- ✓ Uses standard CIOD or IPS fittings.
- ✓ Creates monolithic, fully-restrained pipe systems.



DID YOU KNOW?

Reduced wall thickness relative to HDPE yields more flow and less material for a given pressure class



PRESSURE RATINGS

FUSIBLE BRUTE™ (CIOD)

Dimension Ratio	Pressure (psi)
DR 14	305
DR 18	235
DR 25	165
DR 32.5	125
DR 41	100

FUSIBLE SERIES™ (IPS)

Dimension Ratio	Pressure (psi)
DR 21	200
DR 26	160



For job quotation, contact your IPEX representative.

FUSION IN ACTION

ONTARIO

Central Experimental Farm, Ottawa, Ontario

573m (1,880 LF) of 300mm (12") DR18,
353m (1,158 LF) of 250mm (10") DR25,
170m (558 LF) of 450mm (14") DR25



Fusible PVC was chosen because of less disruption to federally protected land and forest. Also because of traffic control constraints.

Grosse Isle Watermain, Manitoba, Alberta

1,000m (3,281 LF) of 150mm (6") DR18,
3,000m (9,843 LF) of 150mm (6") DR25



Fusible PVC was chosen to minimize restoration costs.

QUEBEC

Direct Bury, St-Henri-de-Taillon, Quebec

5,563.2m (18,252 LF) of 150mm (6") DR25,
10,614m (34,823 LF) of 200mm (8") DR25,
610m (2,001 LF) of 250mm (10") DR25



Fusible PVC was chosen for ease of installation and lower cost.

ALBERTA

Slipline, Epcor 92nd St & 106a Ave, Edmonton, Alberta

85.4m (280 LF) of 400mm (16") DR25



DR25 Fusible Brute was chosen as it offered the optimal flow characteristics for that slipline.

TERRABRUTE CR

4" - 12" (100mm - 300mm)

TerraBrute® CR

Engineered for Horizontal Directional Drilling (HDD) and other trenchless applications, TerraBrute® CR is a 100% non-metallic, CSA B137.3 / AWWA C900 PVC pressure pipe system. Non-corroding and installation friendly, TerraBrute CR allows you to standardize on PVC throughout your potable water and sewer infrastructure. Whether you're using open-cut or trenchless methods, there are no more problems matching materials and couplings. No more surprises.

TerraBrute CR's patented non-metallic "ring-and-pin" gasketed joint design outperforms all other restrained PVC pipe joints on the market, providing more than twice the pull strength of other HDD systems – up to 120,000 lbs. for 300mm / 12" pipe. Unlike competing square-shoulder designs, TerraBrute CR's rounded bell shoulders slide by roots, rocks and other debris that can protrude into the borehole. And unlike HDPE, TerraBrute CR requires no relaxation time before installation of fittings or services.

APPLICATIONS

- Municipal Water Systems
- Fire Lines
- Industrial Lines
- Forcemains

STANDARDS



ADVANTAGES

1 Corrosion Resistant

The new, non-metallic, "ring-and-pin" configuration of TerraBrute CR PVC pressure pipe offers complete corrosion resistance. The external "ring" is designed as two half rings for ease of installation and comes complete with the "pins" ready for insertion, creating a strong, locking joint.

2 Proven Performance

With a 235 psi pressure class, TerraBrute CR delivers the superior strength and corrosion resistance you've come to expect from our Blue Brute pressure pipe, along with the ability to absorb the underground shear and flexural stresses that occur in buried applications.

3 Proven Compatibility

TerraBrute CR trenchless PVC pipe is designed for total compatibility with your municipal system. Connections can be made with standard PVC CIOD fittings, direct tapped couplings or standard service saddles. Repair and handling techniques are the same as for any AWWA PVC pressure pipe.

4 Proven Joining System

Based on our gasketed bell and spigot design, proven through years of service in the field, the TerraBrute CR joint is rated higher than the pressure rating of the pipe. And unlike competing coupling joints, the TerraBrute CR joint has been specially engineered to deliver the highest pull strength safety factors in the industry for HDD applications.

5 Fast and Easy Joint Assembly

Because pipe segments can be assembled during pullback operations, pipe stringing can be eliminated. Assembly time for a 300mm / 12" TerraBrute CR joint is typically less than five minutes.



Standards

CSA B137.3

AWWA C900

TerraBrute is made from stock conforming to AWWA C900.

NQ 3624-250

Factory Mutual and Underwriter's Laboratories

TerraBrute is made from starting stock that is **Factory Mutual** approved and **ULC/ULI** Listed.

“TerraBrute CR is the result of many years of research into the use of PVC pipes in HDD applications. The new non-corroding, locking joint design enables TerraBrute CR to enter new applications while maintaining the high tensile strength and bending radius of the original TerraBrute.”

*Dr. Erez Allouche,
Louisiana Tech University*

NEW NON-METALLIC GASKETED JOINT DESIGN

Extended Lip Bell

Plastic Ring for Pins


Non-metallic Pins

Grooved and Thickened Spigot

Inner Groove

Insertion Line

1

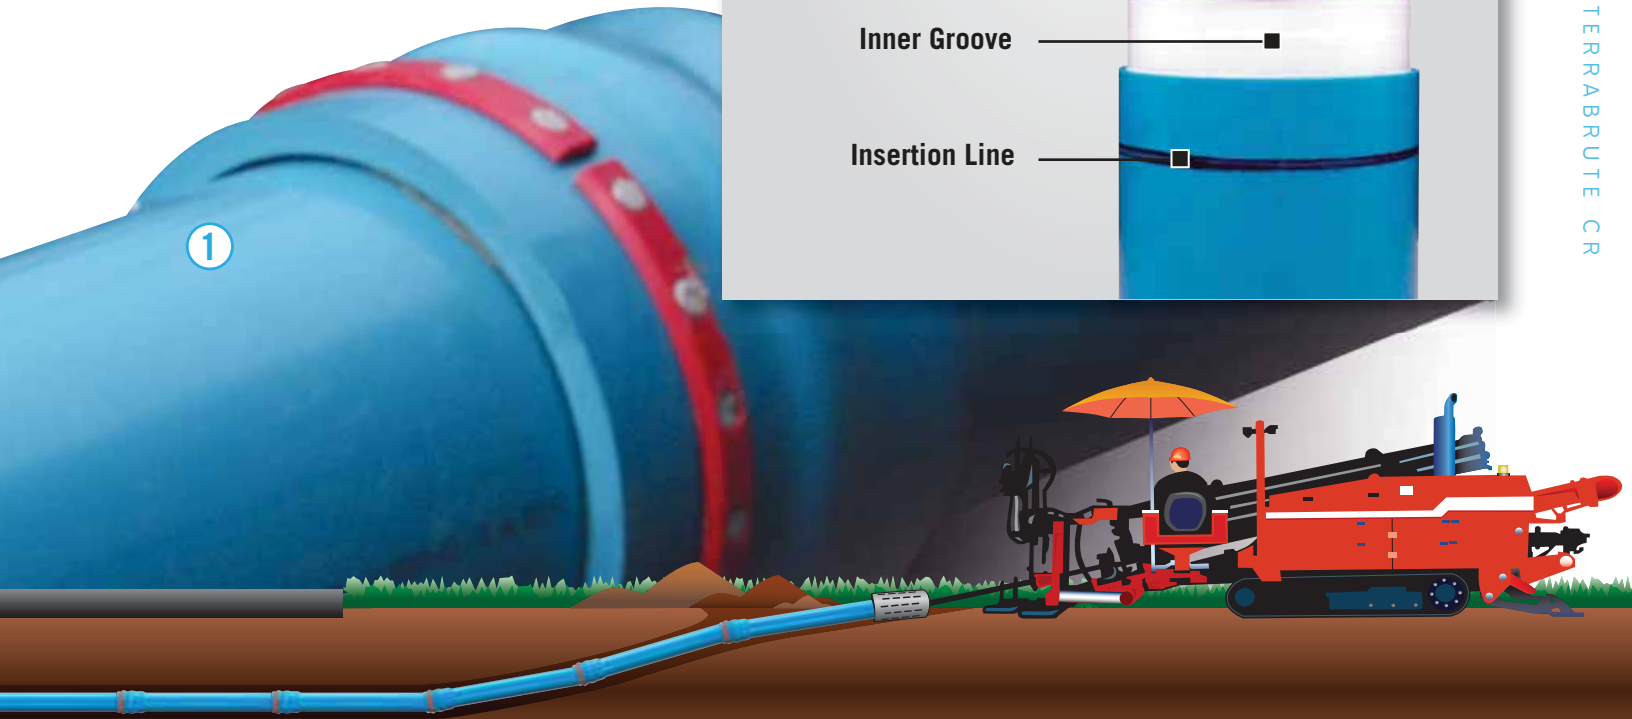



APPLICATIONS

SHORT FORM SPECIFICATIONS

GENERAL

PVC pipe used for horizontal directional drilling (HDD) or other trenchless installation methods shall be manufactured with a cast iron outside diameter (CIOD) and shall be made with starting stock certified to CSA B137.3 for 100mm - 300mm (4" - 12") diameters. Pipe will meet the requirements of AWWA C900, must be Factory Mutual approved, and listed by ULC and ULL.

MAXIMUM ALLOWABLE PULLING FORCE

The maximum allowable pulling force shall be the ultimate tensile capacity of the piping system divided by a safety factor of 2, as shown in the table below.

Nominal Size		Maximum Allowable Pulling Force	
mm	Inches	kN	Lbs.
100	4	50	11200
150	6	110	24700
200	8	115	25800
250	10	187	42100
300	12	275	61800

JOINT DESIGN

PVC pipe must be manufactured with an integral bell, and must have removable gaskets to allow the use of oil-resistant (nitrile) gaskets in contaminated soils.



BRIDGE CROSSINGS

TerraBrute CR's unique "new non-metallic ring-and-pin" joint design provides for easy installation in non-HDD applications where traditional butt fusion techniques would be difficult – such as this span of suspended pressure pipe installed beneath a busy roadway bridge.




ROAD CROSSINGS

TerraBrute CR is ideally suited for short drilling projects where existing structures cannot be disturbed – such as under busy highways, roads and intersections where you connect to PVC pipes.



URBAN CENTERS

Because TerraBrute CR can be assembled segmentally just before entering the borehole, projects take up less space in restricted urban areas, compared to the long strings of pipe typical with HDPE installations.

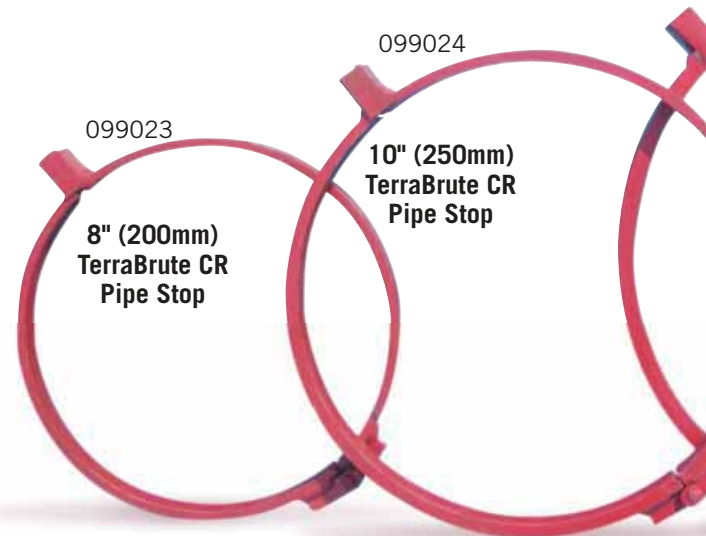

099023

**8" (200mm)
TerraBrute CR
Pipe Stop**

099024

**10" (250mm)
TerraBrute CR
Pipe Stop**

PRODUCT SELECTION CHART

TerraBrute CR Pipe & Dimensions

Nominal Diameter		Product Code	Pressure Class/Rating (2:1 safety factor) psi	Max Outside Diameter (Bell OD)		Avg Internal Diameter	
in	mm			in	mm	in	mm
4	100	070258	305	6.49	165	4.09	104
6	150	070259	305	9.06	230	5.87	149
8	200	070260	235	11.33	288	8.03	204
10	250	070261	235	14.00	355	9.84	250
12	300	070262	235	16.36	416	11.69	297

TerraBrute CR's larger internal diameters, compared to HDPE pipe, provide the same hydraulic performance usually with one size smaller pipe, saving on material costs.

Lay Lengths

Nominal Size		Laying Lengths	
Inches	mm	Feet/Inches	m
4	100	19' 10"	6.04
6	150	19' 9"	6.03
8	200	19' 9"	6.01
10	250	19' 9"	6.01
12	300	19' 9"	6.01

Due to the extended bell configuration, TerraBrute has slightly shorter laying length than standard Blue Brute pipe.

TerraBrute® CR PIPE STOPS

IPEX TerraBrute CR Pipe Stops have been specifically designed to simplify the installation of **8"**, **10"**, and **12"** (**200mm**, **250mm**, and **300mm**) TerraBrute CR. Due to fairly large insertion forces, it can often be difficult to align the internal groove with the pin holes on the larger diameter TerraBrute CR; the new TerraBrute CR Pipe Stops will virtually eliminate this problem of over-homing the pipe. TerraBrute CR Pipe Stops will reduce stoppages in the installation process to pull back and reposition the pipe.

IPEX TerraBrute CR Pipe Stops can be placed on the pipe quickly and easily; a pair of vice-grips is all that is needed to secure the Pipe Stop in place. Made from high-strength steel, TerraBrute CR Pipe Stops are designed to withstand repeated use for all of your installations.

APPLICATIONS

- Municipal Water Systems
- Fire Lines
- Force mains
- Industrial Lines

099025

**12" (300mm)
TerraBrute CR
Pipe Stop**

FEATURES & BENEFITS

- 1 Easy to Use**
 TerraBrute CR Pipe Stops are simple and easy to use, offering quick assembly and disassembly to help prevent installation delays. A pair of vice-grips is all that is needed to secure the Pipe Stop in place.
- 2 Strong & Tough**
 Made from steel, TerraBrute CR Pipe Stops are built strong, tough and are durable enough to withstand repeated use on every job.
- 3 Prevents Over-Homing**
 TerraBrute CR Pipe Stops virtually eliminate the risk of over-homing the pipe. There is no need to pull back and reposition the pipe as the groove will always end up properly aligned with the pin holes.

CYCLETOUGH PIPING SYSTEMS

Pipe: 1-1/2" - 24" (40mm - 600mm)
Injection Moulded Fittings: 1-1/2" - 8" (40mm - 200mm)

CycleTough®

CycleTough® IPS piping systems are specifically designed for irrigation systems and sewer forcemains. The constant cyclic surging that is associated with these applications demands a tough pipe, and more importantly, a specially engineered fitting.

CycleTough fittings have been engineered using the latest techniques in Finite Element Analysis (FEA), ensuring problem-free performance for the long haul.

IPEX CycleTough systems are made with the same high-impact, engineered compound as our Blue Brute® systems, and are tested to the same high standards.

APPLICATIONS

- Forcemains
- Irrigation
- Rural Water Supply
- Water Distribution & Transmission

STANDARDS



ADVANTAGES

- 1 High Pressure Capacity**
CycleTough systems have a 2:1 safety factor for long-term pressures, and over 3.2:1 for temporary surges.
- 2 Toughness Engineered**
CycleTough fittings are engineered for versatility and reliability. Their unique design features extra material added for reinforcement to withstand the stresses imposed by tough irrigation and forcemain applications.
- 3 Iron Pipe Size Outside Diameter (IPSOD)**
CycleTough systems are made with an IPSOD, which is the same outside diameter configuration as schedule piping and most steel process piping.
- 4 Bottle-tight Joints, Removable Gaskets**
IPEX's patented gasket system not only withstands the rated system pressure, but also withstands full vacuum pressures. The removable gasket system allows special oil-resistant (nitrile) gaskets to be easily installed when working in contaminated soils.
- 5 Third-party Certification**
All CycleTough systems are certified to CSA B137.3. Third-party certification verifies a system will perform as expected, meeting all applicable standards.



UNIQUE PRESSURE GASKET SYSTEM

First Smaller Lip prevents foreign material from coming in contact with second sealing lip. It also centralizes the pipe spigot while at the same time preventing contact with lock ring.

High-Impact and High-Memory Polypropylene Lockring prevents gasket movement from the raceway during assembly and normal pressure conditions.

Massive Rubber Areas and low compression set for outstanding compression seal.

Second High-Rise Sealing Lip creates a tight seal having ample sealing tolerance for pipe with nominal diameter.

Completely Injection Moulded (including colour coded polypropylene locking) for better tolerance and dimension control.

Arched Back Pocket gives excellent tolerance to the gasket seal raceway. Transmits an even radial force from the locking to the gasket seat.

Pressure Pockets transmit internal water pressure to the pipe spigot making a tight leak-proof seal.



DID YOU KNOW?

All CycleTough 4000 fittings use high-molecular-weight pipe materials with a minimum HDB of 4,000 psi. Materials with higher molecular weights tend to exhibit better resistance to crack initiation.

SHORT FORM SPECIFICATIONS

PIPES

IPSOD PVC pipe shall be manufactured from PVC compound with ASTM D1784 cell class 12454B. PVC pipe will have a minimum hydrostatic design basis (HDB) of 4000 psi and a short-term strength of 6400 psi. Pipe shall be certified to CSA B137.3.

FITTINGS

Injection-moulded PVC fittings shall be made from PVC compound with a minimum HDB of 4000 psi. Fabricated fittings shall be made from sections of pipe certified to CSA B137.3 and fittings shall also be certified to CSA B137.3.

All pipes and fittings shall be listed to NSF Standard 61 and shall be colour-coded white.





PRODUCT SELECTION CHART CYCLETOUGH PIPE

Size		Product Code	Avg. ID		Min. Wall Thickness		Avg. OD	
in	mm		in	mm	in	mm	in	mm

WHY CYCLETOUGH FOR CYCLIC APPLICATIONS?

Current research shows that PVC pipe has a virtually unlimited lifespan under some of the most demanding cyclic conditions. While the pipe is inherently 'CycleTough', fittings are subject to a variety of different stresses that can easily damage a conventionally designed product. CycleTough injection moulded fittings have been specifically designed for high-pressure cyclic applications using the latest engineering methods, and extensive computer modeling. While other PVC fittings may not be up to the task, CycleTough fittings were designed for it, with the right amount of material in the right places. That is why CycleTough fittings look different from other PVC fittings on the market: CycleTough fittings are made for tough applications.

Series 100 (SDR41)

4	100	061204	4.278	108.41	.109	2.78	4.50	114.3
6	150	061206	6.282	159.57	.162	4.12	6.63	168.3
8	200	061208	8.180	207.77	.209	5.32	8.62	219.1
10	250	061210	10.194	258.93	.262	6.66	10.75	273.1
12	300	061212	12.093	307.15	.311	7.90	12.75	323.9
14	350	060214	13.277	337.24	.341	8.66	14.00	355.6
16	400	060216	15.174	385.41	.390	9.90	16.00	406.4
18	450	060218	17.074	433.67	.437	11.10	18.00	457.2
20	500	060220	18.985	481.71	.488	12.40	20.00	508.0
24	600	060224	22.756	578.01	.587	14.90	24.00	609.6

Series 125 (SDR32.5)

4	100	061104	4.208	106.88	.138	3.50	4.50	114.3
6	150	061106	6.194	157.32	.204	5.18	6.63	168.3
8	200	061108	8.063	204.80	.265	6.72	8.62	219.1
10	250	061110	10.049	255.24	.331	8.40	10.75	273.1
12	300	061112	11.921	302.78	.392	9.96	12.75	323.9
14	350	060114	13.090	332.49	.429	10.90	14.00	355.6
16	400	060116	14.957	379.90	.492	12.50	16.00	406.4
18	450	060118	16.823	427.31	.555	14.10	18.00	457.2
20	500	060120	18.698	474.93	.614	15.60	20.00	508.0
24	600	060124	22.431	569.74	.740	18.80	24.00	609.6

PRESSURE RATINGS

Pressure Ratings and Burst Pressures

Size Range	Dimension Ratio	Pressure Rating (psi)	Long Term Rating (psi)
40 – 600	21	200	200
40 – 600	26	160	160
75 – 600	32.5	125	125
100 – 600	41	100	100

For more information on how these ratings are calculated, please refer to Volume I: Pressure Piping Systems Design Technical Manual

PRODUCT SELECTION CHART CYCLETOUGH PIPE

Size		Product Code	Avg. ID		Min. Wall Thickness		Avg.OD	
in	mm		in	mm	in	mm	in	mm

Series 160 (SDR26)

1-1/2	40	061900	1.731	43.97	.080	2.02	1.90	48.3
2	50	061902	2.184	55.47	.091	2.30	2.38	60.4
2-1/2	65	061901	2.642	67.11	.109	2.78	2.87	73.0
3	75	061903	3.215	81.65	.135	3.42	3.50	88.9
4	100	061904	4.134	105.01	.172	4.38	4.50	114.3
6	150	061906	6.085	154.56	.255	6.48	6.63	168.3
8	200	061908	7.921	201.20	.331	8.42	8.62	219.1
10	250	061910	9.874	250.79	.413	10.50	10.75	273.1
12	300	061912	11.717	297.61	.488	12.40	12.75	323.9
14	350	060914	12.857	326.56	.539	13.70	14.00	355.6
16	400	060916	14.698	373.33	.614	15.60	16.00	406.4
18	450	060918	16.531	419.89	.693	17.60	18.00	457.2
20	500	060920	18.364	466.45	.772	19.60	20.00	508.0
24	600	060924	22.039	559.78	.925	23.50	24.00	609.6


Series 200 (SDR21)

1-1/2	40	061300	1.709	43.42	.090	2.28	1.90	48.3
2	50	061301	2.137	54.29	.113	2.86	2.38	60.4
2-1/2	65	061302	2.584	65.62	.137	3.48	2.87	73.0
3	75	061303	3.146	79.91	.167	4.24	3.50	88.9
4	100	061304	4.046	102.77	.214	5.44	4.50	114.3
6	150	061306	5.957	151.30	.316	8.02	6.63	168.3
8	200	061308	7.756	197.00	.409	10.40	8.62	219.1
10	250	061310	9.665	245.49	.512	13.00	10.75	273.1
12	300	061312	11.467	291.25	.606	15.40	12.75	323.9
14	350	061314	12.589	319.77	.665	16.90	14.00	355.6
16	400	061316	14.381	365.27	.764	19.40	16.00	406.4
18	450	061318	16.180	410.98	.858	21.80	18.00	457.2
20	500	061320	17.980	456.70	.953	24.20	20.00	508.0
24	600	061324	21.580	548.12	1.142	29.00	24.00	609.6

CYCLETOUGH FITTINGS


Dimension	Product Code	
	inches	mm

Stop Coupling G x G




2	50	055036
2-1/2	65	055037
3	75	055038
4	100	055039
6	150	055040
8	200	055041

Repair Coupling G x G




2	50	055217
2-1/2	65	055218
3	75	055219
4	100	055220
6	150	055221
8	200	055222
* 10*	250	055223

22-1/2° Elbow G x G




* 2	50	055053
* 3	75	055054
* 4	100	055055
* 6	150	055056

45° Elbow G x G



* 1-1/2	35	055059
2	50	055060
2-1/2	65	055061
3	75	055062
4	100	055063
6	150	055064
8	200	055065
* 10	250	055066
* 12	300	055067

90° Elbow G x G




* 1-1/2	35	055069
2	50	055070
2-1/2	65	055071
3	75	055072
4	100	055073
6	150	055074
8	200	055075
* 10	250	055076
* 12	300	055280

* Fabricated Non CSA, G = Gasket, Sp = Spigot

PRODUCT SELECTION CHART CYCLETOUGH FITTINGS


	Dimension		Product Code
	inches	mm	

Tee G x G x G




*	1-1/2	35	055227
	2	50	055228
	2-1/2	65	055229
	3	75	055230
	4	100	055231
	6	150	055232
	8	200	055233
*	10	250	055234
*	12	300	055281

Wye G x G x G




*	3	75	055291
*	4	100	055293
*	6	150	055290
*	8 x 6	200 x 150	055294
*	8	200	055298
*	12 x 6	300 x 150	055297
*	12 x 8	300 x 200	055299
*	12	300	055296

Cross G x G x G



*	2	50	055045
*	2-1/2	65	055046
*	3	75	055047
	4	100	055048
	6	150	055049


Increaser Bushing G x Sp



	1-1/2 x 2	35 x 50	055129
	2 x 2-1/2	50 x 65	055130
	2 x 3	50 x 75	055131
	2 x 4	50 x 100	055133
*	2 x 6	50 x 150	049280
	2-1/2 x 3	65 x 75	055132
	2-1/2 x 4	65 x 100	055134
	2-1/2 x 6	65 x 150	055136
	3 x 4	75 x 100	055135
	3 x 6	75 x 150	055137
	4 x 6	100 x 150	055138
	4 x 8	100 x 200	055139
	6 x 8	150 x 200	055140


	Dimension		Product Code
	inches	mm	

Reducing Tee G x G x G




	2 x 1-1/2	50 x 35	055151
	2-1/2 x 2	65 x 50	055153
	3 x 1-1/2	75 x 35	055154
	3 x 2	75 x 50	055155
	3 x 2-1/2	75 x 65	055156
	4 x 2	100 x 50	055157
	4 x 2-1/2	100 x 65	055158
	4 x 3	100 x 75	055159
	6 x 2	150 x 50	055161
	6 x 2-1/2	150 x 65	055162
	6 x 3	150 x 75	055163
	6 x 4	150 x 100	055164
	8 x 2	200 x 50	055165
	8 x 3	200 x 75	055166
	8 x 4	200 x 100	055167
	8 x 6	200 x 150	055168

Male Adapter G x Male Pipe Thread



	1-1/2	35	055099
	2	50	055100
	2-1/2	65	055101
	3	75	055102
*	4	100	055103
*	6	150	055104

Spigot Adapter G x Sp




	1-1/2	35	055028
	2	50	055029
	2-1/2	65	055030
	3	75	055031
*	4	100	055032
*	6	150	055033

* Fabricated Non CSA, G = Gasket, Sp = Spigot
 † Reduced using Solvent Welded Threading Reducer Bushings


	Dimension		Product Code
	inches	mm	

Tap Service Tee G x G x NPT



†	2 x 1/2	50 x 15	055187
†	2 x 3/4	50 x 20	055188
†	2 x 1	50 x 25	055189
†	2 x 1-1/4	50 x 30	055190
†	2 x 1-1/2	50 x 35	055191
†	2-1/2 x 1/2	65 x 15	055192
†	2-1/2 x 3/4	65 x 20	055193
†	2-1/2 x 1	65 x 25	055194
†	2-1/2 x 1-1/4	65 x 30	055195
†	2-1/2 x 1-1/2	65 x 35	055196
	2-1/2 x 2	65 x 50	055197
†	3 x 1/2	75 x 15	055198
†	3 x 3/4	75 x 20	055199
	3 x 1	75 x 25	055200
	3 x 1-1/4	75 x 30	055201
	3 x 1-1/2	75 x 35	055202
	3 x 2	75 x 50	055203
†	4 x 1/2	100 x 15	055204
†	4 x 3/4	100 x 20	055205
	4 x 1	100 x 25	055206
	4 x 1-1/4	100 x 30	055207
	4 x 1-1/2	100 x 35	055208
	4 x 2	100 x 50	055209
†	6 x 1/2	150 x 15	055210
†	6 x 3/4	150 x 20	055211
	6 x 1	150 x 25	055212
	6 x 1-1/2	150 x 35	055214
	6 x 2	150 x 50	055215

Tap Service Tee G x G x AWWA Thread



	4 x 3/4	100 x 20	055125
	4 x 1	100 x 25	055126
	6 x 3/4	150 x 20	055127
	6 x 1	150 x 25	055128


	Dimension		Product Code
	inches	mm	

Cap



*	2	50	055400
*	3	75	055402
*	4	100	055404
*	6	150	055406
*	8	200	055408


Permanent Plug



*	1-1/2	35	055107
*	2	50	055108
*	2-1/2	65	055109
*	3	75	055110
*	4	100	055111
*	6	150	055112
*	8	200	055113

The spigot plug may be solvent welded.


Adapter Flange x Gasket Bell



*	1-1/2	35	055091
*	2	50	055092
*	2-1/2	65	055093
*	3	75	055094
*	4	100	055095
*	6	150	055096
*	8	200	055268

Flanged fittings have a maximum operating pressure of 150 psi.

Adapter Bell x Female IPT



*	1-1/2	35	055251
*	2	50	055252
*	2-1/2	65	055253
*	3	75	055433
*	4	100	055254
*	6	150	055256

Adapter PE (Plain End) x MIPT



*	3	75	055260
*	4	100	055105
*	6	150	055106

* Fabricated Non CSA, G = Gasket, Sp = Spigot
 † Reduced using Solvent Welded Threading Reducer Bushings



IPEX... for quality irrigation piping



IPEX CycleTough® irrigation piping has remained the preferred brand of PVC piping in Canada for over 30 years. Here's why...

- Certified to CSA B137.3
- 160 psi or 200 psi options
- Sizes 1-1/2" to 24"
- Solvent-weld or gasket joint
- Easy to install, zero maintenance
- Made in Canada


So for your next irrigation project, ensure the underground piping meets the same high standard of your greens and fairways. Ask for IPEX.

For more information on IPEX CycleTough pipe and fittings, please visit our website at www.ipexinc.com

As copper prices continue to rise, cities across North America are turning to cost effective alternatives for their water service lines that connect municipal watermains to buildings. IPEX provides a range of options from polyethylene, PEX and composite tubing for water service lines which are immune to corrosion and mineral buildup.

All IPEX water service systems are CSA and NSF certified and conform to AWWA standards. They are backed by the quality and service you've come to expect from IPEX.

WATER SERVICE SYSTEMS



Blue904 PEX Water Service Tubing

34

Q-Line Water Service Tubing

36

Gold901 Water Service Tubing

38

Philmac 3G Compression Fittings

40

BLUE904 PEX WATER SERVICE TUBING

3/4" - 2" (20mm - 50mm)

BLUE904®

As copper prices continue to rise, cities across North America are turning to cost effective alternatives for their water service lines that connect municipal water mains to buildings.

Blue904® is fully certified, lightweight and flexible PEX water service tubing. Installation friendly, Blue904 will resist corrosion, maximizing water flow over the lifetime of the system. Made with a copper tube size (CTS) OD (SDR 9), Blue904 works with standard compression fittings and is available in 3/4", 1", 1-1/4", 1-1/2" & 2" (20mm, 25mm, 32mm, 40mm & 50mm) sizes.

APPLICATIONS

- Water Service Tubing
- Municipal Watermains

STANDARDS



AWWA
MEMBER



ASTM F2023



Standard 14 & 61



B137.5



F876 & F877



3660-950

ADVANTAGES

- 1 Easy Installation**
No special tools required.
- 2 Corrosion Resistant for Long Life**
Blue904 will resist the effects of chlorine and scaling and will not corrode in soil. It is also freeze resistant due to its low thermal conductivity when compared to copper tubing.
- 3 Lightweight and Flexible for Easy Handling**
- 4 Jobsite Safe**
Unlike copper tubing, PEX tubing has no scrap value, eliminating the threat of jobsite theft common with copper. As a result, no special storage precautions are necessary.
- 5 Packaging and Markings**
Blue904 is available in 100 ft (30m) and 300 ft (90m) coils and is packaged in boxes for UV protection and portability. Each coil has footage markings to assist during installation and is identified with product name, size, certifications and manufacturing date.



PRESSURE RATING

Sizes	Pressure Rating
3/4" - 2" (20mm - 50mm)	160 psi @ 73°F (1100 kPa @ 23°C) 100 psi @ 180°F (690 kPa @ 82°C)



PRODUCT SELECTION CHART

Nominal Size		I.D.		Min. Bend Radius		Product Code	Coil Length	
in	mm	in	mm	in	mm		feet	m
3/4	20	0.681	17.3	4.5	114	117001	300	90
3/4	20	0.681	17.3	4.5	114	117002	100	30
1	25	0.875	22.2	6.0	152	117003	300	90
1	25	0.875	22.2	6.0	152	117004	100	30
1-1/2	40	1.241	31.5	9.0	229	117006	100	30
2	50	1.625	41.3	12.0	305	117007	100	30

RISING COPPER COSTS ARE INCREASING SITE THEFT ...

Why not PEX it?

Blue904[®]
PEX Water Service Tubing

- » Easy Installation
- » Corrosion Resistant
- » Lightweight & Flexible
- » Jobsite Safe
- » Fully Certified




For more information, contact us at 1-866-473-9462 or visit us at www.ipexinc.com

Q-LINE WATER SERVICE TUBING

3/4" & 1" (20mm & 25mm)

Q-Line®

Introducing Q-Line – a unique composite, water service tubing that combines the advantages of both metal and plastic, while eliminating their drawbacks. Now available from IPEX, the world's leading technical innovator in thermoplastic piping systems.

Manufactured by IPEX to AWWA C903-02, Q-Line is the only water service tubing in North America that delivers the strength of metal, the flexibility of soft copper and the durability of thermoplastic. What's more, because it eliminates the shortcomings of traditional piping materials, Q-Line is superior to them all.

APPLICATIONS

- Water Service Tubing
- Municipal Watermains
- Reclaimed Water Applications

STANDARDS



ADVANTAGES

- 1 Engineered Composite Construction**
A composite pipe constructed of flexible aluminum tubing permanently bonded between inner and outer layers of raised temperature polyethylene (PE-RT). Q-Line's unique structure offers optimum strength and toughness in a lightweight, easily handled and installed water service tubing.
- 2 Superior to Traditional Pipe**
Unlike copper, Q-Line's non-corroding thermoplastic layers resist the most aggressive water conditions and hot-soil environments. Q-Line won't leach copper or other metallic ions, so the quality of drinking water is assured and service life is longer.
- 3 Potable Water Certified**
Q-Line carries third-party ASTM F1282 and CSA B137.9 certification, as well as NSF-PW potable water certification, and meets all North American plumbing codes for water supply up to and inside the building.
- 4 High Flow Rates**
With larger inside diameters than CTS polyethylene piping and a super-smooth interior wall that does not permit build-up of calcium or other minerals, Q-Line offers the best flow rates in the industry.
- 5 Handles Like Copper**
Simply roll Q-Line tubing down the trench and it stays where it's laid (unlike plain polyethylene). You can make goosenecks and bends easily just as you would with copper, and Q-Line keeps its shape.

PE-RT
Aluminum
PE-RT



CODES AND STANDARDS

Q-Line water service tubing is manufactured to AWWA C903, ASTM F1282 and CSA B137.9, and meets NSF-PW potable water requirements as well as requirements of the following national codes.

- National Plumbing code of Canada
- Uniform Plumbing Code
- International Plumbing Code
- International Residential Code
- National Standard Plumbing Code
- SBCCI Standard Plumbing Code

MORE ADVANTAGES ...

Built-in Permeation Barrier

Q-Line composite water service tubing has been successfully tested against the most aggressive contaminants, like termiticides.

Zero Scrap Value

Because Q-Line's metallic core is permanently locked between layers of polyethylene, it has zero scrap metal value. So unlike copper and other valuable metals which are continually disappearing due to theft, Q-Line is more likely to stay on the job site where it's needed.

SHORT FORM SPECIFICATIONS

TUBING

Water service tubing shall be composite PE-AL-PE tubing manufactured in accordance with the requirements of AWWA C903 and certified to CSA B137.9 and ASTM F1282. It shall have a long term pressure rating of 1380kPa at 23°C (200 psi at 73°F) and 690kPa at 82°C (100 psi at 180°F).

The pipe shall be third-party tested and certified to comply with NSF-PW potable water and NSF CL-TD chlorine resistance requirements. The service tubing shall be colour coded light blue as manufactured by IPEX under the trade name "Q-Line" or approved equal.



FITTINGS

Fittings for composite PE-AL-PE tubing shall be brass water service fittings conforming to AWWA C800.



PRODUCT SELECTION CHART

Q-Line Pipes

Nominal Size		Product Code	Avg. ID		Min. Wall Thickness		Avg. OD		Min. Bending Radius		Coil Length	
in	mm		in	mm	in	mm	in	mm	in	mm	ft	m
3/4	20	115001	0.79	20	0.10	2.5	0.98	25	5.0	125	150	45.7
3/4	20	115003	0.79	20	0.10	2.5	0.98	25	5.0	125	1000	305.0
1	25	115004	0.98	25	0.14	3.5	1.26	32	6.3	160	150	45.7

Municipal Brass Water Service Fittings

Description	Product Code
3/4" Q-Line x 3/4" Copper Compression, Universal Q-Line Adapter	088083*
1" Q-Line x 1" Copper Compression, Universal Q-Line Adapter	088084*
3/4" Q-Line x 3/4" Male NPT Adapter	088129
1" Q-Line x 1" Male NPT Adapter	088250
3/4" Q-Line Coupling	088131
1" Q-Line Coupling	088251

* Adapts to any municipal valve with compression end.

Note: All brass fittings conform to AWWA C800 Standard for Underground Service Line Valves and Fittings.

ONE OF A KIND

Q-Line has unique inside and outside diameters that are different both from copper and conventional PE service tubing. Easily installed adapters that allow Q-line to be used with standard brass fittings are widely available.

GOLD901 WATER SERVICE TUBING

3/4" - 2" (20mm - 50mm)

GOLD901™

Gold901™ is a lightweight, easy to install, 200 psi rated water service tubing that can be used on both the municipal and private-side of a project.

Gold901 is manufactured to Copper Tube Size (CTS) from High-Density Polyethylene (HDPE) and is third-party certified and listed to AWWA C901, CSA B137.1, NQ 3660-950 and NSF 61.

Gold901 is conveniently available in both coils and reels and is available in 3/4" to 2".

APPLICATIONS

- Water Service Tubing

STANDARDS



ADVANTAGES

- 1 Chemical Resistance**
Virtually immune to chemical attacks. Please refer to the IPEX Chemical Resistance Guide for specific chemical suitability.
- 2 Noncorroding**
Resistant to corrosive soils, aggressive water, stray electrical currents and moist environments
- 3 Lightweight**
A 200 foot coil of 3/4" Gold901 weighs 20 lbs
- 4 Connections**
Brass or plastic compression fittings are readily available. A stainless steel insert or a specially designed (copper tube size) plastic insert must be used to reinforce Gold Stripe at the joint.
- 5 Sequential Markings**
Every 2 or 5 feet
- 6 Superior Flow**
Hazen Williams C-Factor = 150
- 7 Expansion Contraction Rate**
1.4" per 100' of pipe for every 10°F change in temperature, 22mm per 10m of pipe for every 10°C change in temperature.
- 8 High Pressure**
Rated at 200 psi @ 73°F.
Rated at 1380 kPa @ 23°C.



PRODUCT SELECTION CHART

DIMENSIONS - GOLD901 TUBING

Nominal Pipe Size inches	Coil Length mm	Coil Length feet	O.D. Average	I.D. Average	Min. Radius of Bend	Product Code
3/4	20	100	0.875	0.671	19	121402
		200	0.875	0.671	19	121403
		400	0.875	0.671	19	121404
		500	0.875	0.671	19	121405
		3000	0.875	0.671	19	121406
		1	25	100	1.125	0.863
150	1.125	0.863		23	121408	
200	1.125	0.863		23	121409	
300	1.125	0.863		23	121410	
500	1.125	0.863		23	121411	
1000	1.125	0.863		23	121412	
1500	1.125	0.863		23	121413	
1-1/4	32	100	1.375	1.055	30	121414
		300	1.375	1.055	30	121415
1-1/2	40	100	1.625	1.245	34	121416
		250	1.625	1.245	34	121417
		400	1.625	1.245	34	121418
		1000	1.625	1.245	34	121419
2	50	100	2.125	1.629	44	121420
		200	2.125	1.629	44	121421
		500	2.125	1.629	44	121422

Note: Custom coil and reel sizes may be available upon request.

PHILMAC 3G COMPRESSION FITTINGS

1/2" - 2" (12mm - 50mm)

Philmac

Gone are the days of juggling and assembling loose fitting components on the job site or even having to turn off the water line when connecting a new line. Thanks to Philmac's unique Slide & Tighten™ technology, you can get a perfect seal with Philmac 3G fittings in any condition by hand or with a wrench.

Philmac fittings come pre-assembled and ready to use so there's no need to disassemble the fitting or prepare the pipe. No solvent cementing or special tools are needed. Simply insert the pipe into the fitting until you feel the first point of resistance and then tighten the nut. Visual stops and gradually increasing mechanical resistance as the nut is turned prevents over-tightening.

Philmac's compact size makes installation easy in confined spaces, and Philmac 3G fittings are engineered to avoid pipe twist during installation, reducing the risk of untightening previously-installed joints – a constant risk with brass fittings.

ADVANTAGES

- 1 Turn-to-Tighten Design**
Philmac's unique design allows you to achieve a perfect seal with the turn of a hand or wrench. Visual stops and gradually increasing mechanical resistance as the nut is tightened reduces the risk of over-tightening.
- 2 Compact Ergonomic Grip**
Small and lightweight, Philmac 3G fittings are specially shaped to your hand for easy turning. Their compact size is perfect for working in confined areas.
- 3 Advanced Material**
Philmac 3G fittings are made from an advanced high-performance polypropylene so they're UV, impact and corrosion-resistant—tough enough for 50+ years of reliable service.
- 4 Dynamic Compression Sealing**
Philmac 3G fittings are highly engineered to provide a robust leak-proof seal with superior pull-out resistance. In addition, the strength of the nut ensures minimal distortion when tightened with a wrench.
- 5 Component Interchangeability**
Because both the CTSOD and ID Series fittings are based on the same core fitting design, components can be easily interchanged in order to transition from one type to another on the same fitting. And with adaptor kits available for other material types, you'll always have the right fitting for the job.

APPLICATIONS

- Water Service Coupling
- Residential Water Service
- Residential Irrigation Systems
- Cottage Country Water Service
- Rural Irrigation

STANDARDS



i DID YOU KNOW?

Philmac's unique Slide & Tighten™ technology can give you a perfect seal just by hand or with a wrench. Just slide and tighten and the job's done!



PHILMAC 3G: CTSOD AND ID SIZES

Philmac 3G Compression Fittings offer the flexibility to connect to five different types of pipe; three polyethylene pipe types (CTS, ID Series and IPS), Composite and Copper.

There are two dedicated fittings, CTS and ID Series, which come preassembled and ready to use. That leaves three others: IPS, XPA, and copper that require a conversion kit. Converting a Philmac fitting is very simple and can be done in just a few steps.

CTSOD

ID Series



OD Fittings

3/4" – 2"



ID Series

1/2" – 2"



UNIVERSAL TRANSITION COUPLING (UTC) & FITTINGS

With the Universal Transition Coupling, virtually any type of pipe can be connected to any other type of pipe. Rather than servicing specific materials, the UTCs service a range of outside pipe diameters, regardless of the piping material. The wide tolerance range allows seven couplings to cover pipe sizes from 1/2" to 2". Versatility coupled with simple slide-and-tighten installation make the Philmac UTC the practical choice.



ADVANTAGES

- ✓ Universal transition couplings are the ideal solution for connecting a wide variety of pipes.
- ✓ One coupling connects copper, galvanized iron, PVC, lead and even PE and PEX.
- ✓ Wide tolerance range allows seven couplings to cover pipe sizes from 1/2" to 2".
- ✓ Easy to fit "Slide & Tighten" technology.
- ✓ Couplings are end-load resistant with no restraint needed to prevent pipe pull-out.



Sizing Chart


Pipe Material Standard	A	B	C	D	E	F	G
	0.59" - 0.83" 15 - 21 mm	0.83" - 1.06" 21 - 27 mm	1.06" - 1.34" 27 - 34 mm	1.34" - 1.54" 34 - 39 mm	1.54" - 1.69" 39 - 43 mm	1.85" - 1.93" 47 - 49 mm	2.32" - 2.40" 59 - 61 mm
Nominal Pipe Size (inches)							
PE / PEX CTS OD	1/2	3/4	1	1-1/4	1-1/2	-	-
PE IPS OD	-	1/2 or 3/4	1	-	1-1/4	1-1/2	2
PE SIDR 7	1/2	3/4	-	1	-	-	-
PE SIDR 9	1/2	3/4	1	-	1-1/4	-	-
PE SIDR 11.5	1/2	3/4	1	-	1-1/4	1-1/2	-
PE SIDR 15	1/2	3/4	1	-	1-1/4	-	2
Copper CTS OD	1/2	3/4	1	1 1/4	1-1/2	-	-
PVC IPS OD	-	1/2 or 3/4	1	-	1-1/4	1-1/2	2
Galvanized Iron IPS OD	-	1/2 or 3/4	1	-	1-1/4	1-1/2	2
ABS IPS OD	-	1/2 or 3/4	1	-	1-1/4	1-1/2	2
Lead - Strong	1/2	5/8	3/4	1	1-1/4	-	-
Lead - Extra Strong	-	1/2	5/8 or 3/4	1	-	-	-
Lead - Double Extra Strong	-	1/2	5/8 or 3/4*	3/4*	1	1 1/4	-

* If 3/4" XXS Lead Pipe OD is larger than 1.34", the pipe needs to be shaved if using a Size C UTC fitting. Otherwise, a size D UTC Coupling can be used when OD is larger than 1.34".

PRODUCT SELECTION CHART – CTSOD FITTINGS


	Dimension		Product Code
	inches	mm	

Couplings Compression x Compression




3/4	20	258000
3/4	20	258001
1-1/4 x 1-1/4	30 x 30	258002
1-1/2	35	258003
2	50	258004

Reducing Couplings Compression x Compression




1 x 3/4	25 x 20	258005
1-1/4 x 1	30 x 25	258131

Male Adapters Compression x MIPT



3/4 x 1/2	20 x 15	258006
3/4	20	258007
1 x 1/2	25 x 15	258008
1 x 3/4	25 x 20	258009
1	25	258010
1-1/4 x 3/4	30 x 20	258011
1-1/4 x 1	30 x 25	258012
1-1/4	30	258013
1-1/2 x 1	35 x 25	258014
1-1/2 x 1-1/4	35 x 30	258015
1-1/2	35	258016
2 x 1-1/2	50 x 35	258017
2	50	258018

Female Adapters Compression x FIPT



3/4 x 1/2	20 x 15	258019
3/4	20	258020
1 x 3/4	25 x 20	258021
1	25	258022
1-1/4 x 1	30 x 25	258023
1-1/4	30	258024
1-1/2 x 1-1/4	35 x 30	258025
1-1/2	35	258026
2 x 1-1/2	50 x 35	258027
2	50	258028


Elbow Compression x Compression



3/4	20	258029
1	25	258030
1-1/4	30	258031
1-1/2	35	258032
2	50	258033


	Dimension		Product Code
	inches	mm	

Elbow Compression x FIPT



3/4	20	258034
1 x 3/4	25 x 20	258035
1	25	258036
1-1/4 x 1	30 x 25	258037
1-1/4	30	258038
1-1/2 x 1-1/4	35 x 30	258039
1-1/2	35	258040

Elbow Compression x FIPT




3/4	20	258151
1	25	258152
1-1/4	30	258153
1-1/2	35	258154

End Caps Compression




3/4	20	258042
1	25	258043
1-1/4	30	258044
1-1/2	35	258045

Tee Compression




3/4	20	258042
1	25	258043
1-1/4	30	258044
1-1/2	35	258045


Tee Compression x Compression x FIPT





3/4	20	258047
1 x 3/4	25 x 20	258048
1	25	258049
1-1/4 x 3/4	30 x 20	258050
1-1/4 x 1	30 x 25	258051
1-1/4	30	258052
1-1/2 x 3/4	35 x 20	258053
1-1/2 x 1-1/4	35 x 30	258054
1-1/2	35	258055


PRODUCT SELECTION CHART – ID SERIES FITTINGS


	Dimension		Product Code
	inches	mm	
Couplings Compression x Compression			
	1/2	15	258059
	3/4 x 1/2	20 x 15	258065
	3/4	20	258060
	1	25	258061
	1-1/4	30	258062
	1-1/2	35	258063
	2	50	258064


	Dimension		Product Code
	inches	mm	
Male Adapters Compression x MIPT			
	1/2	15	258066
	1/2 x 3/4	15 x 20	258067
	3/4 x 1/2	20 x 15	258068
	3/4	20	258069
	3/4 x 1	20 x 25	258070
	1 x 3/4	25 x 20	258071
	1	25	258072
	1 x 1-1/4	25 x 30	258073
	1-1/4 x 1	30 x 25	258074
	1-1/4	30	258075
	1-1/4 x 1-1/2	30 x 35	258076
	1-1/2	35	258077
	1-1/2 x 2	35 x 50	258078
	2	50	258079


	Dimension		Product Code
	inches	mm	
Female Adapters Compression x FIPT			
	1/2	15	258080
	1/2 x 3/4	15 x 20	258081
	3/4	20	258082
	3/4 x 1	20 x 25	258083
	1	25	258084
	1 x 1-1/4	25 x 30	258085
	1-1/4	30	258086
	1-1/4 x 1-1/2	30 x 35	258087
	1-1/2	35	258088
	1-1/2 x 2	35 x 50	258089
	2	50	258090

	Dimension		Product Code
	inches	mm	
Elbow Compression x Compression			
	1/2	15	258091
	3/4	20	258092
	1	25	258093
	1-1/4	30	258094
	1-1/2	35	258095
	2	50	258096






	Dimension		Product Code
	inches	mm	
Elbow Compression x FIPT			
	1/2 x 3/4	15 x 20	258097
	3/4	20	258098
	3/4 x 1	20 x 25	258099
	1	25	258100
	1 x 1-1/4	25 x 30	258101
	1-1/4	30	258130

	Dimension		Product Code
	inches	mm	
Tee Compression			
	1/2	15	258102
	3/4	20	258103
	1	25	258104
	1-1/4	30	258105
	1-1/2	35	258106

	Dimension		Product Code
	inches	mm	
Tee Compression x Compression x FIPT			
	3/4	20	258107
	1 x 1/2	25 x 15	258108
	1	25	258109
	1-1/4 x 1/2	30 x 15	258110
	1-1/4 x 3/4	30 x 20	258111
	1-1/4 x 1-1/2	30 x 35	258112
	1-1/2 x 2	35 x 50	258113

	Dimension		Product Code
	inches	mm	
End Caps Compression			
	1/2	15	258114
	3/4	20	258115
	1	25	258116
	1-1/4	30	258117
	1-1/2	35	258118
	2	50	258183


PRODUCT SELECTION CHART – ADAPTER KITS

			Dimension		Product Code
			inches	mm	
CTS Adapter Kit (Includes Gold Collet, CTS Nut, CTS Seal)					
		3/4	20	258132	
		1	25	258133	
		1-1/4	30	258134	
		1-1/2	35	258135	
ID Series Adapter Kit (Includes Red Collet, Red Insert, ID Series Nut, ID Series Seal)					
		1/2	15	258137	
		3/4	20	258138	
		1	25	258139	
		1-1/4	30	258140	
		1-1/2	35	258141	
		2	50	258142	
Copper Adapter Kit (Includes Brown Carborundum Gripper, Copper Nut, Copper Seal)					
		1/2	15	258119	
		3/4	20	258120	
		1	25	258121	
Q-Line Adapter Kit (Includes Blue Collet, Q-Line Nut, Q-Line Seal)					
		1/2	15	258122	
		3/4	20	258123	
		1	25	258124	
IPS OD Adapter Kit (Includes Green Collet, IPS Nut, IPS Seal)					
		3/4	20	258125	
		1	25	258126	
		1-1/4	30	258127	
		1-1/2	35	258128	
		2	50	258129	

PRODUCT SELECTION CHART – UNIVERSAL TRANSITION COUPLINGS (UTC) & FITTINGS


Dimension mm	Product Code
-----------------	-----------------

Coupling UTC x UTC




15 - 21 x 15 - 21	255208
21 - 27 x 21 - 27	255209
27 - 34 x 27 - 34	255210
34 - 39 x 34 - 39	255946
39 - 43 x 39 - 43	255211
47 - 49 x 47 - 49	255947
59 - 61 x 59 - 61	255948

Reducing Coupling UTC x UTC




21 - 27 x 15 - 21	255212
27 - 34 x 15 - 21	255214
27 - 34 x 21 - 27	255213
34 - 39 x 27 - 34	255197
39 - 43 x 27 - 34	255215

Elbow UTC x UTC




15 - 21 x 15 - 21	255156
21 - 27 x 21 - 27	255157

Tee UTC x UTC x UTC




15 - 21 x 15 - 21 x 15 - 21	255158
-----------------------------	--------

Tee UTC x UTC x FIPT



15 - 21 x 3/4 FIPT	255159
21 - 27 x 3/4 FIPT	255167

Adapter UTC x MIPT



15 - 21 x 3/4 MIPT	255169
21 - 27 x 3/4 MIPT	255344
27 - 34 x 3/4 MIPT	255345
27 - 34 x 1 MIPT	255196

With a long-proven track record for reliable, watertight performance underground, IPEX offers the widest range of industrial and domestic, sanitary and storm water sewage conveyance systems available on the market today. Third-party certified to applicable industry standards, all of our state-of-the-art PVC gravity sewer systems are engineered and manufactured to virtually eliminate the leakage and infiltration common with traditional materials like concrete.

SEWER PIPING SYSTEMS



Ring-Tite / Enviro-Tite

48

Ultra-Rib

58

Ultra-X2

66

NovaForm PVC Liner

70

Solvent Weld Sewer Fittings

72

GASKETED SEWER PIPING SYSTEMS

Ring-Tite
4" - 60" (100mm - 1500mm)

Enviro-Tite
4" - 15" (100mm - 375mm)

Ring-Tite® Enviro-Tite®

Ring-Tite and Enviro-Tite piping systems are DR35 and DR28 sewer pipes manufactured to demanding ASTM and CSA standards. The two products are identical except for Enviro-Tite having a minimum recycled material content of 50%. Both products have tight joints that can withstand well in excess of both the ASTM and CSA requirements.

APPLICATIONS

- Gravity Flow Sanitary Sewers
- Storm Sewers
- Sewer Laterals
- Industrial Effluent Lines

STANDARDS

RING-TITE



B182.2



3624-130/135

ASTM
MEMBER

D3034 & F679

ENVIRO-TITE



B182.2



3624-130/135

ASTM
MEMBER

F1760

ADVANTAGES

1 Corrosion-proof Performance

IPEX Ring-Tite and Enviro-Tite systems are immune to corrosion from aggressive soils and galvanic action. In addition, H₂S and other aggressive chemicals common in sanitary sewage have no effect.

2 Tight Joints & Lower Treatment Costs


Eliminate infiltration and exfiltration. Ring-Tite and Enviro-Tite joints easily outperform concrete and corrugated PE joints.

3 Third-Party Certification

IPEX Ring-Tite & Enviro-Tite systems are certified to CSA B182.2. Third-party certification is your verification that the product will perform as stated.

4 High Flow Capacity

IPEX's PVC pipe and fittings are manufactured with smooth inner walls and provide systems with a Manning coefficient of 0.009, allowing for use of smaller diameters of pipe when compared to rough walled pipe.

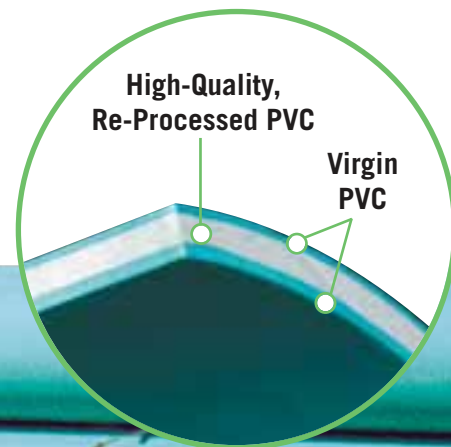

Enviro-Tite®

SHORT FORM SPECIFICATIONS

GENERAL

Main line sewers will be PVC DR35 sewer pipe and shall be in compliance with ASTM D3034 or ASTM F1760 and third-party certified to CSA B182.2. Sewer laterals will be PVC DR28 sewer pipe and shall be third-party certified by CSA as above.

JOINTS

Sealing gaskets must meet the requirements of ASTM D3034 or ASTM F1760 or CSA B182.2. In addition, the pipe joints must be able to withstand a minimum hydrostatic pressure of 50 psi (345 kPa) without leakage.

PIPE STIFFNESS

The minimum ring stiffness shall be 46 psi (320 kPa) for DR35 pipe and 90 psi (625 kPa) for DR 28. This stiffness will be determined using the test methods prescribed by ASTM D3034 and ASTM F1760.

FITTINGS

Injection-moulded gasketed PVC fittings shall meet the requirements of ASTM D3034 and ASTM F1336 and shall be certified to CSA B182.1 or CSA B182.2. Fabricated fittings must conform to ASTM F1336 and CSA B182.2.



DIMENSIONS

	Nominal Size		Average I.D.		Min Wall Thickness		Average O.D.	
	in	mm	in	mm	in	mm	in	mm
DR35								
	4	100	3.97	100.94	0.12	3.06	4.21	107.06
	5	135	5.32	135.08	0.16	4.09	5.64	143.26
	6	150	5.92	150.29	0.18	4.55	6.28	159.39
	8	200	7.92	201.16	0.24	6.10	8.40	213.36
	10	250	9.90	251.46	0.30	7.62	10.50	266.70
	12	300	11.79	299.36	0.36	9.07	12.50	317.50
	15	375	14.43	366.42	0.44	11.10	15.30	388.62
	18	450	17.63	447.87	0.53	13.57	18.70	475.01
	21	525	20.79	527.99	0.63	16.00	22.05	559.99
	24	600	23.39	594.00	0.71	18.00	24.80	630.00
	27	675	26.36	669.42	0.80	20.29	27.95	710.00
	30	750	30.17	766.36	0.91	23.22	32.00	812.80
	36	900	36.11	917.22	1.09	27.79	38.30	972.80
	42	1050	41.95	1065.72	1.27	32.29	44.50	1130.30
	48	1200	47.89	1216.56	1.45	36.87	50.79	1290.30
	54	1350	54.27	1378.49	1.64	41.77	57.55	1462.00
	60	1500	58.08	1475.48	1.76	44.71	61.61	1564.90
DR28								
	4	100	3.91	99.42	0.15	3.82	4.21	107.06
	5	135	5.24	133.02	0.20	5.12	5.64	143.26
	6	150	5.83	148.01	0.22	5.69	6.28	159.39



PRODUCTION SELECTION CHART

	Dimension		Product Code
	inches	mm	

Ring-Tite PVC Gravity Sewer Pipe DR28



Green	4	100	042074
	5	135	042075
	6	150	042076
White	4	100	042164
	5	135	042078
	6	150	042166

Ring-Tite PVC Gravity Sewer Pipe DR35



Green	4	100	039204
	5	135	039150
	6	150	039206
	8	200	041148
	10	250	041149
	12	300	041412
	15	375	041152
	18	450	041448
	21	525	041449
	24	600	041450
	27	675	041451
	30	750	041459
	36	900	041453
	42	1050	041481
	48	1200	041038
White	54	1350	041040
	60	1500	041039
	8	200	041008
	10	250	041016
	12	300	041021
	15	375	041027

Enviro-Tite PVC Sewer Pipe DR28



Green	4	100	042036
	5	135	042037
	6	150	042038
White	4	100	042114
	5	135	042115
	6	150	042116


Enviro-Tite PVC Sewer Pipe DR35



Green	4	100	039207
	5	135	039208
	6	150	039209
	8	200	041850
	10	250	041851
	12	300	041852
	15	375	041855

	Dimension		Product Code
	inches	mm	


Tee G x G x G



4	100	043104
5	135	043443
6 x 4	150 x 100	043105
6	150	043106
8 x 4	200 x 100	043094
8 x 5	200 x 135	043095
8 x 6	200 x 150	043096
8	200	043098
10 x 4	250 x 100	043102
10 x 5	250 x 135	043085
10 x 6	250 x 150	043099
10 x 8	250 x 200	043108
10	250	043089
12 x 4	300 x 100	043091
12 x 5	300 x 135	043109
12 x 6	300 x 150	043103
12 x 8	300 x 200	043100
12 x 10	300 x 250	043078
12	300	043101
15 x 4	375 x 100	043092
15 x 5	375 x 135	043246
15 x 6	375 x 150	043110
15 x 8	375 x 200	043111
15 x 10	375 x 250	043112
15 x 12	375 x 300	043113
15	375	043107
18 x 4	450 x 100	043912
18 x 6	450 x 150	043114
18 x 8	450 x 200	043891
18 x 10	450 x 250	043911
18 x 12	450 x 300	043910
18 x 15	450 x 375	043347
18	450	043444
21 x 4	525 x 100	043004
21 x 6	525 x 150	043115
21 x 8	525 x 200	043908
21 x 10	525 x 250	043907
21 x 12	525 x 300	043889
21 x 15	525 x 375	*
21 x 18	525 x 450	043349
21	525	043906
24 x 4	600 x 100	043809
24 x 6	600 x 150	043351
24 x 8	600 x 200	043905
24 x 10	600 x 250	043353
24 x 12	600 x 300	043359
24 x 15	600 x 375	043037
24 x 18	600 x 450	043045
24 x 21	600 x 525	043354
24	600	043044
27 x 4	675 x 100	*
27 x 6	675 x 150	043888
27 x 8	675 x 200	*
27 x 10	675 x 250	043360
27 x 12	675 x 300	*
27 x 15	675 x 375	*
27 x 18	675 x 450	*
27 x 21	675 x 525	*
27 x 24	675 x 600	*
27	675	*

Dimension		Product Code
inches	mm	


Tee Wye G x G x G



4	100	043156
6 x 4	150 x 100	043158
6	150	043449
8 x 4	200 x 100	043159
8 x 6	200 x 150	043160
8	200	043450
10 x 4	250 x 100	043693
10 x 6	250 x 150	043451
10 x 8	250 x 200	043452
12 x 4	300 x 100	043453
12 x 6	300 x 150	043454
12 x 8	300 x 200	043455
15 x 4	375 x 100	043456
15 x 6	375 x 150	043457
15 x 8	375 x 200	043458
18 x 4	450 x 100	043999
18 x 6	450 x 150	043459
18 x 8	450 x 200	043460
21 x 4	525 x 100	*
21 x 6	525 x 150	043116
21 x 8	525 x 200	*
24 x 4	600 x 100	043046
24 x 6	600 x 150	*
24 x 8	600 x 200	*
27 x 4	675 x 100	*
27 x 6	675 x 150	*


Dimension		Product Code
inches	mm	


45° Wye G x G x G





4	100	043304
5 x 4	135 x 100	043303
5	135	043305
6 x 4	150 x 100	043307
6	150	043306
8 x 4	200 x 100	043294
8 x 6	200 x 150	043296
8	200	043298
10 x 4	250 x 100	043311
10 x 6	250 x 150	043312
10 x 8	250 x 200	043313
10	250	043308
12 x 4	300 x 100	043319
12 x 6	300 x 150	043276
12 x 8	300 x 200	043314
12 x 10	300 x 250	043315
12	300	043309
15 x 4	375 x 100	043320
15 x 6	375 x 150	043153
15 x 8	375 x 200	043316
15 x 10	375 x 250	143317
15 x 12	375 x 300	143318
15	375	143310
18 x 4	450 x 100	143904
18 x 6	450 x 150	143903
18 x 8	450 x 200	043902
18 x 10	450 x 250	043362
18 x 12	450 x 300	043363
18 x 15	450 x 375	043901
18	450	043900
21 x 4	525 x 100	043899
21 x 6	525 x 150	043898
21 x 8	525 x 200	043897
21 x 10	525 x 250	043896
21 x 12	525 x 300	043895
21 x 15	525 x 375	043894
21 x 18	525 x 450	043893
21	525	043467
24 x 4	600 x 100	043488
24 x 6	600 x 150	043364
24 x 8	600 x 200	043799
24 x 10	600 x 250	043892
24 x 12	600 x 300	043042
24 x 15	600 x 375	043554
24 x 18	600 x 450	043041
24 x 21	600 x 525	*
24	600	043040
27 x 4	675 x 100	043551
27 x 6	675 x 150	043787
27 x 8	675 x 200	043549
27 x 10	675 x 250	043890
27 x 12	675 x 300	*
27 x 15	675 x 375	*
27 x 18	675 x 450	*
27 x 21	675 x 525	*
27 x 24	675 x 600	*
27	675	*


PRODUCTION SELECTION CHART


	Dimension		Product Code
	inches	mm	
Double 45° Wye G x G x G x G			
	6 x 4	150 x 100	043254
	6	150	043255
	8 x 4	200 x 100	043258
	8 x 6	200 x 150	043469
	8	200	043260
	10 x 4	250 x 100	*
	10 x 6	250 x 150	043251
	12 x 4	300 x 100	*
	12 x 6	300 x 150	043259
	12 x 8	300 x 200	043248
	15 x 4	375 x 100	*
	15 x 6	375 x 150	*
	15 x 8	375 x 200	*
	15 x 10	375 x 250	*
	15 x 12	375 x 300	*
	18 x 4	450 x 100	*
	18 x 6	450 x 150	*
18 x 8	450 x 200	*	
18 x 10	450 x 250	*	
18 x 12	450 x 300	*	
18 x 15	450 x 375	*	


	Dimension		Product Code
	inches	mm	
45° Elbow G x G			
	4	100	043504
	5	135	043505
	6	150	043506
	8	200	043507
	10	250	043508
	12	300	043509
	15	375	143515
	18	450	043971
	21	525	043957
	24	600	043953
	27	675	043516

	Dimension		Product Code
	inches	mm	
45° Elbow Sp x G			
	4	100	043404
	5	135	043405
	6	150	043406
	8	200	043407
	10	250	043411
	12	300	043412
	15	375	143951
	18	450	043203
	21	525	043946
	24	600	043943
	27	675	*

	Dimension		Product Code
	inches	mm	
90° Elbow G x G			
	4	100	043214
	6	150	043216
	8	200	043217
	10	250	043218
	12	300	043219
	15	375	043220
	18	450	043239
	21	525	043955
	24	600	043989
	27	675	043204


	Dimension		Product Code
	inches	mm	
22-1/2° Elbow G x G			
	4	100	043964
	5	135	043968
	6	150	043969
	8	200	043963
	10	250	043966
	12	300	043965
	15	375	043967
	18	450	043174
	21	525	043958
	24	600	043954
	27	675	043808

	Dimension		Product Code
	inches	mm	
90° Elbow Sp x G			
	4	100	043234
	6	150	043236
	8	200	043238
	10	250	043205
	12	300	043206
	15	375	043221
	18	450	043948
	21	525	043945
	24	600	043942
	27	675	*

	Dimension		Product Code
	inches	mm	
22-1/2° Elbow Sp x G			
	4	100	043977
	5	135	043976
	6	150	043975
	8	200	043972
	10	250	043973
	12	300	043974
	15	375	043952
	18	450	043949
	21	525	043947
	24	600	043944
	27	675	043199


	Dimension		Product Code
	inches	mm	

45° Long Radius Bend Sp x G




4	100	043143
5	135	043365
6	150	043166
8	200	043144
10	250	043151
12	300	043152

22-1/2° Long Radius Bend Sp x G




4	100	043172
5	135	043366
6	150	043922
8	200	043139
10	250	043140
12	300	043141

Repair Coupling G x G (w/o pipe stop)



4	100	043624
5	135	043625
6	150	043626
8	200	043627
10	250	043630
12	300	143631
15	375	043637
18	450	043941
21	525	043938
24	600	043937
27	675	043670


Coupling G x G (with stop)



4	100	043640
5	135	043641
6	150	043643
8	200	043644
10	250	043645
12	300	043632
15	375	043638
18	450	043935
21	525	043934
24	600	043933
27	675	043940


	Dimension		Product Code
	inches	mm	

Saddle Wye (c/w 2 straps)



6 x 4	150 x 100	043594
8 x 4	200 x 100	043595
8 x 6	200 x 150	043598
10 x 4	250 x 100	043599
10 x 6	250 x 150	043596
12 x 4	300 x 100	043600
12 x 6	300 x 150	043597
15 x 4	375 x 100	043603
15 x 6	375 x 150	043602
18 x 4	450 x 100	043440
18 x 6	450 x 150	043441
21 x 4	525 x 100	043442
21 x 6	525 x 150	*
24 x 4	600 x 100	*
24 x 6	600 x 150	043584
27 x 4	675 x 100	*
27 x 6	675 x 150	*

Saddle Tee (c/w 2 straps)




6 x 4	150 x 100	043125
8 x 4	200 x 100	043124
8 x 6	200 x 150	043126
10 x 4	250 x 100	043127
10 x 6	250 x 150	043129
12 x 4	300 x 100	043130
12 x 6	300 x 150	043132
15 x 4	375 x 100	043133
15 x 6	375 x 150	043135
18 x 4	450 x 100	043429
18 x 6	450 x 150	043431
21 x 4	525 x 100	043432
21 x 6	525 x 150	043433
24 x 4	600 x 100	043434
24 x 6	600 x 150	043585
27 x 4	675 x 100	043703
27 x 6	675 x 150	043477


Spigot Plug




4	100	043734
5	135	043735
6	150	043736
8	200	043738
10	250	043740
12	300	043741
15	375	043742
18	450	043743
21	525	043744
24	600	043745
27	675	043751


PRODUCTION SELECTION CHART

Incraser	SP x G	Dimension		Product Code
		inches	mm	
	5 x 4	135 x 100	043729	
	6 x 4	150 x 100	043939	
	8 x 4	200 x 100	043621	
	8 x 6	200 x 150	043620	
	10 x 4	250 x 100	043368	
	10 x 6	250 x 150	043618	
	10 x 8	250 x 200	043622	
	12 x 6	300 x 150	043617	
	12 x 8	300 x 200	043616	
	12 x 10	300 x 250	043623	
	15 x 4	375 x 100	043369	
	15 x 6	375 x 150	043300	
	15 x 8	375 x 200	043370	
	15 x 10	375 x 250	043371	
	15 x 12	375 x 300	043615	
	18 x 8	450 x 200	043538	
	18 x 10	450 x 250	043678	
	18 x 12	450 x 300	043629	
	18 x 15	450 x 375	043539	
	21 x 12	525 x 300	*	
	21 x 15	525 x 375	043288	
	21 x 18	525 x 450	043673	
	24 x 12	600 x 300	043047	
	24 x 15	600 x 375	043048	
	24 x 18	600 x 450	043674	
	24 x 21	600 x 525	043675	
	27 x 12	675 x 300	043679	
27 x 15	675 x 375	*		
27 x 18	675 x 450	043289		
27 x 21	675 x 525	043676		
27 x 24	675 x 600	043677		


Incraser Coupling	G x G	Dimension		Product Code
		inches	mm	
	6 x 4	150 x 100	043882	
	8 x 4	200 x 100	043536	
	8 x 6	200 x 150	043535	
	10 x 6	250 x 150	043528	
	10 x 8	250 x 200	043531	
	12 x 6	300 x 150	143530	
	12 x 8	300 x 200	143532	
	12 x 10	300 x 250	143520	
	15 x 6	375 x 150	043931	
	15 x 8	375 x 200	043930	
	15 x 10	375 x 250	043533	
	15 x 12	375 x 300	043534	
	18 x 8	450 x 200	043690	
	18 x 10	450 x 250	043929	
	18 x 12	450 x 300	043293	
	18 x 15	450 x 375	043928	
	21 x 4	525 x 100	043927	
	21 x 8	525 x 200	043926	
	21 x 10	525 x 250	043925	
	21 x 12	525 x 300	043924	
	21 x 15	525 x 375	043923	
	21 x 18	525 x 450	043921	
	24 x 4	600 x 100	043920	
	24 x 6	600 x 150	043919	
	24 x 8	600 x 200	043918	
	24 x 10	600 x 250	043917	
	24 x 12	600 x 300	043916	
	24 x 15	600 x 375	043915	
	24 x 18	600 x 450	043914	
	24 x 21	600 x 525	043913	
27 x 12	675 x 300	*		
27 x 15	675 x 375	*		
27 x 18	675 x 450	*		
27 x 21	675 x 525	*		
27 x 24	675 x 600	*		

Eccentric Incraser Sp x G


	6 x 4	150 x 100	043237
	10 x 4	250 x 100	043268
	10 x 5	250 x 135	043655
	10 x 6	250 x 150	043269
	10 x 8	250 x 200	043270
	12 x 4	300 x 100	043271
	12 x 5	300 x 135	043656
	12 x 6	300 x 150	043272
	12 x 8	300 x 200	043273
	12 x 10	300 x 250	043274
	15 x 4	375 x 100	043275
	15 x 6	375 x 150	043277
	15 x 8	375 x 200	043278
	15 x 10	375 x 250	043279
	15 x 12	375 x 300	043280
	18 x 4	450 x 100	043281
	18 x 6	450 x 150	043282
	18 x 8	450 x 200	043230
18 x 10	450 x 250	043512	
18 x 12	450 x 300	043283	
18 x 15	450 x 375	043284	
21 x 15	525 x 375	043285	
21 x 18	525 x 450	*	
24 x 18	600 x 450	*	
24 x 21	600 x 525	*	
27 x 21	675 x 525	*	
27 x 24	675 x 600	*	

	Dimension		Product Code
	inches	mm	
Cap			
	4	100	043959
	5	135	043960
	6	150	043988
	8	200	043961
	10	250	043886
	12	300	043987
	15	375	043962
	18	450	043746
	21	525	043747
	24	600	043168
	27	675	043749


Bell Cleanout Adapter

	6	150	043760
---	---	-----	--------


Spigot Cleanout Adapter

	6	150	043750
---	---	-----	--------


Adapter Coupling G x G (PVC Sp to ABS)

	4	100	043712
	5 x 4	135 x 100	043711
	6 x 4	150 x 100	043713

Adapter Coupling G x G (PVC Sp to AC Sp)

	4	100	043720
	5 x 4	135 x 100	043642

Clay Tile Adapter Sp x Sp (Clay G to PVC G)

	4	100	043169
	6	150	043170
	8	200	043171

M Adapter Sp x G


	6	150	081319
---	---	-----	--------

	Dimension		Product Code
	inches	mm	


Adapter PVC Gasket x PVC Hub (G x Solvent Weld Hub)

	4	100	043858
---	---	-----	--------

Bushing Adapter AC Bell x PVC Sp (Sp x G)

	4 x 4	100 x 100	043724
	8 x 8	200 x 200	043727


Bushing Adapter PVC Bell x AC Sp (Sp x G)

	6 x 5	150 x 135	043619
---	-------	-----------	--------


Adapter PVC Bell (off concrete main)

	4	100	043770
	6	150	043771
	8	200	043772

Manhole Gasket Adapter

	4	100	043050
	5	135	043056
	6	150	043051
	8	200	043052
	10	250	043053
	12	300	043054
	15	375	043055
	18	450	043295
	21	525	*
	24	600	043058


Sanded Manhole Bell (w/o stop)

	4	100	043060
	5	135	043334
	6	150	043061
	8	200	043063
	10	250	043064
	12	300	043065
	15	375	043062
	18	450	043066
	21	525	043067
	24	600	043068
	27	675	043591


PRODUCTION SELECTION CHART

	Dimension		Product Code
	inches	mm	


Manhole Adapter G x SP (24"/600mm long)

	4	100	043297
	5	135	043299
	6	150	043301
	8	200	043302
	10	250	043328
	12	300	043329
	15	375	043330
	18	450	043331
	21	525	043548
	24	600	043332
27	675	*	


Wing Adapter (mortar-on)

	4	100	043190
	5	135	043192
	6	150	043191
	8	200	043193
	10	250	043194
	12	300	043195
	15	375	043196
	18	450	*
	21	525	*
	24	600	*
27	675	*	


Universal Storm Sewer Saddle (c/w Bell & Seating Gasket)

	4	100	082244
	5	135	082245
	6	150	082246
	8	200	082248

Hand Tight Expansion End Plug


	4	100	043200
	5	135	043201
	6	150	043202
	8	200	043212

Stainless Steel Strap


	6	150	043346
	8	200	043348
	10	250	043350
	12	300	043352

	Dimension		Product Code
	inches	mm	


Boot Jack - Sanitary

	5x4x4 (P)	125x100x100x100 (P)	043705
	6x5x5x4 (P)	150x125x125x100 (P)	043706
	6x4x4x4 (P)	150x100x100x100 (P)	043707


Boot Jack - Storm

	5x4x4 (P)	125x100x100x100 (P)	043715
	6x5x5x4 (P)	150x125x125x100 (P)	043716
	6x4x4x4 (P)	150x100x100x100 (P)	043717

Test Tee - Sanitary

	4x4x4 (C)	100x100x100 (C)	043646
	5x4x4 (C)	125x100x100 (C)	043647
	5x5x4 (C)	125x125x100 (C)	043648
	6x6x4 (C)	150x150x100 (C)	043649

Test Tee - Storm

	4x4x4 (C)	100x100x100 (C)	043666
	5x4x4 (C)	125x100x100 (C)	043667
	5x5x4 (C)	125x125x100 (C)	043668
	6x6x4 (C)	150x150x100 (C)	043669

(P): Plug (C): Cap

Description	Product Code
-------------	--------------

Lubricant

1 kg container	074811
4 kg container	074812

Dimension		Product Code
inches	mm	

InsertaTees (for DR35 PVC Sewer Pipe)



8 x 4	200 x 100	072434
10 x 4	250 x 100	072440
10 x 6	250 x 150	072441
12 x 4	300 x 100	072436
12 x 6	300 x 150	072437
12 x 8	300 x 200	072442
15 x 4	375 x 100	072438
15 x 6	375 x 150	072443
15 x 8	375 x 200	072444
18 x 4	450 x 100	072439
18 x 6	450 x 150	072445
18 x 8	450 x 200	072446
18 x 10	450 x 250	072447
18 x 12	450 x 300	072448
21 x 4	525 x 100	072449
21 x 6	525 x 150	072450
21 x 8	525 x 200	072451
21 x 10	525 x 250	072452
21 x 12	525 x 300	072453
21 x 15	525 x 375	-
24 x 4	600 x 100	072583
24 x 6	600 x 150	072584
24 x 8	600 x 200	072585
24 x 10	600 x 250	072586
24 x 12	600 x 300	072587
27 x 4	675 x 100	072588
27 x 6	675 x 150	072589
27 x 8	675 x 200	072590
27 x 10	675 x 250	072591
27 x 12	675 x 300	072592
* 30 x 4	750 x 100	072593
* 30 x 6	750 x 150	072594
* 30 x 8	750 x 200	072595
* 30 x 10	750 x 250	072596
* 30 x 12	750 x 300	072597
** 36 x 4	900 x 100	072598
** 36 x 6	900 x 150	072599
** 36 x 8	900 x 200	072600
** 36 x 10	900 x 250	072601
** 36 x 12	900 x 300	072602

* 30" DR35 32.000" O.D. Pipe w .915 WT Pipe
 ** 36" DR35 38.300" O.D. Pipe w 1.100 WT Pipe



IPEX OFFERS A 4" x 3" SDR 35 ADAPTER BUSHING

IPEX offers a new adapter bushing to create a transition between a SDR35 Drain Line solvent weld system and a Ring-Tite® gasket system.

Deflection stress on buried piping systems is a common occurrence in construction and can inadvertently place unwanted stress on joints. The new adapter bushing is designed with a 4" long spigot to reduce any chance of the joint pulling apart as a result of deflection stress.

Dimension	Product Code
inches	

SDR35 Adapter Bushing

(for transition between Solvent Weld & Ring-Tite)

4 x 3 Extended Sp x H	243040
-----------------------	--------

ULTRA-RIB PIPING SYSTEMS

8" - 24" (200mm - 600mm)

Ultra-Rib®

IPEX Ultra-Rib® is a gravity flow PVC sewer pipe with concentric reinforcing ribs that encircle the pipe to provide superior ring stiffness and performance. It is an extruded, seamless pipe made from high grade PVC compound.

Ultra-Rib is available in standard sewer sizes from 200mm to 600mm (8" - 24"). Its optimized profile design offers strength and reliability, as well as economy and superior flow rates.

APPLICATIONS

- Sanitary and Storm Sewers
- Industrial Lines
- Highway & Culvert

STANDARDS



D1784
F477



3624-135



B182.4

ADVANTAGES

- 1 Tight Joints and Lower Treatment Costs**
Eliminate infiltration and exfiltration. Ultra-Rib's 50 psi capable joints easily outperform concrete and corrugated PE joints.
- 2 Superior Flow Characteristics**
Because of the smooth inside wall of Ultra-Rib, a Manning's number of 0.009 can be used when designing systems using Ultra-Rib pipe. This compares with Manning's numbers of up to 0.023 for other materials like clay or concrete.
- 3 Abrasion Resistance**
Ultra-Rib has been proven to be more abrasion-resistant than other profile pipes, and has out-performed concrete pipe in testing at California State University.
- 4 Chemical Resistance**
PVC is virtually immune to chemical attack from any type of sewage. Hydrogen sulphide attack, which causes millions of dollars of damage to concrete and metal infrastructure, will not affect Ultra-Rib.
- 5 Stress Crack Resistance**
While some HDPE pipes have been found to crack prematurely under load, Ultra-Rib's tough PVC construction and superior formulation has been proven to be immune to these problems.




DID YOU KNOW?

Ultra-Rib's seamless 'Open Profile' wall has the same stiffness as DR35, but with a more efficient use of structural material.



DIMENSIONS

Pipe Size		Average I.D. d		Average Diameter Over Ribs D		O.D. at Bell D ₃		Waterway Wall t	
in	mm	in	mm	in	mm	in	mm	in	mm
8	200	7.89	200	8.80	224	9.78	248	0.087	2.20
10	250	9.86	251	11.00	280	12.22	311	0.091	2.30
12	300	11.74	298	13.10	333	14.59	371	0.102	2.60
15	375	14.37	365	16.04	408	17.82	453	0.110	2.80
18	450	17.65	448	19.57	497	21.77	553	0.130	3.30
21	525	20.75	527	22.80	579	25.14	638	0.160	4.06
24	600	23.50	597	25.61	650	28.24	717	0.180	4.58

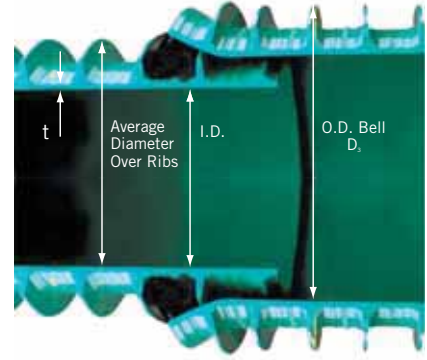

SHORT FORM SPECIFICATIONS

GENERAL

IPEX Ultra-Rib PVC Pipe is available in sizes 200mm, 250mm, 300mm, 375mm, 450mm, 525mm and 600mm (8" - 24").

MATERIAL

Ultra-Rib PVC Pipe shall be made of PVC compound having a cell classification of 12454B as defined in ASTM D1784B.

PRODUCT

The pipe shall be extruded with a smooth interior and with solid reinforcing ribs on the exterior at right angles to the pipe. The space between any two ribs serves as a gasket race.

Ultra-Rib PVC pipe and fittings shall be certified to CSA B182.4 "Profile (Ribbed) PVC Sewer Pipe and Fittings", and shall meet the requirements of ASTM F794 "Standard Specification for Poly (Vinyl Chloride) (PVC) Ribbed Gravity Sanitary Pipe and Fittings Based on Controlled Inside Diameter".

PIPE STIFFNESS

Pipe stiffness must be 320 kPa (46 lbs/in of sample length per inch of deflection) at 5% vertical deflection when tested according to ASTM D2412.

JOINTS

Gaskets for use with Ultra-Rib pipe are manufactured from EPDM and are designed specifically for use with Ultra-Rib pipe. This unique design is also available in Nitrile.

Sealing gaskets shall meet the requirements of CSA B182.4 and ASTM F477, with the additional requirement that joints shall be

able to withstand 345 kPa (50 psi) hydrostatic pressure.

The joint will not leak at 10.8 psi or 25' (74 kPa) or 7.5m) of head with -74 kPa (22") Hg vacuum with spigot under 5% ring deflection and joint at full axial deflection.

MOULDED FITTINGS

Injection-moulded gasketed PVC fittings of ribbed construction shall be certified to CSA B182.1 or CSA B182.2 and used for direct connection to Ultra-Rib pipes in available sizes.

FABRICATED FITTINGS

Fittings fabricated for use with Ultra-Rib pipe shall be certified to CSA B182.4 or ASTM F794 and may include legs of PVC pipe meeting CSA B182.1, B182.2 or ASTM D3034 or F679.

LUBRICANT


Assembly of Ultra-Rib pipe and fittings shall be done in accordance with the manufacturer's directions using only IPEX PVC pipe lubricant. Substitute lubricants shall not be used. IPEX lubricant shall be applied to the inside of the bell to be joined, to a uniform thickness for a distance inside the bell equivalent to three ribs from outside edge.


COLOUR CODING


Pipe shall be colour-coded green.



PRODUCTION SELECTION CHART



	Dimension		Product Code
	inches	mm	
	8	200	086008
	10	250	086010
	12	300	086012
	15	375	086015
	18	450	086018
	21	525	086021
	24	600	086024

	Dimension		Product Code
	inches	mm	
	Tee B x B x G (Ultra-Rib x Ultra-Rib x DR35 or 28)		
	8 x 4	200 x 100	087150
	8 x 5	200 x 135	087151
	8 x 6	200 x 150	087152
	8	200	087153
	10 x 4	250 x 100	087154
	10 x 5	250 x 135	087155
	10 x 6	250 x 150	087156
	10 x 8	250 x 200	087157
	12 x 4	300 x 100	087159
	12 x 5	300 x 135	087160
	12 x 6	300 x 150	087161
	12 x 8	300 x 200	087162
	12 x 10	300 x 250	087163
	12	300	087164
	15 x 4	375 x 100	087165
	15 x 5	375 x 135	087166
	15 x 6	375 x 150	087167
	15 x 8	375 x 200	087168
	15 x 10	375 x 250	087169
	15 x 12	375 x 300	087170
	18 x 4	450 x 100	087172
	18 x 5	450 x 135	087173
	18 x 6	450 x 150	087174
	18 x 8	450 x 200	087175
	18 x 10	450 x 250	087176
	18 x 12	450 x 300	087177
	18 x 15	450 x 375	087178
18	450	087179	
21 x 4	525 x 100	087180	
21 x 5	525 x 135	087181	
21 x 6	525 x 150	087182	
21 x 8	525 x 200	087183	
21 x 10	525 x 250	087184	
21 x 12	525 x 300	087185	
21 x 15	525 x 375	087186	
21 x 18	525 x 450	087187	
21	525	087188	
24 x 4	600 x 100	087190	
24 x 5	600 x 135	087199	
24 x 6	600 x 150	087191	
24 x 8	600 x 200	087192	
24 x 10	600 x 250	087193	
24 x 12	600 x 300	087194	
24 x 18	600 x 450	087196	
24 x 21	600 x 525	087197	
24	600	087198	

	Dimension		Product Code
	inches	mm	
	Tee B x B x B (Ultra-Rib x Ultra-Rib x Ultra-Rib)		
	8	200	087100
	10 x 8	250 x 200	087101
	10	250	087102
	12 x 8	300 x 200	087103
	12 x 10	300 x 250	087104
	12	300	087105
	15 x 8	375 x 200	087106
	15 x 10	375 x 250	087107
	15 x 12	375 x 300	087108
	15	375	087109
	18 x 8	450 x 200	087110
	18 x 10	450 x 250	087111
	18 x 12	450 x 300	087112
	18 x 15	450 x 375	087113
	18	450	087114
	21 x 8	525 x 200	087115
	21 x 10	525 x 250	087116
	21 x 12	525 x 300	087117
	21 x 15	525 x 375	087118
	21 x 18	525 x 450	087119
	21	525	087120
	24 x 8	600 x 200	087121
	24 x 10	600 x 250	087720
	24 x 12	600 x 300	087123
	24 x 15	600 x 375	087124
	24 x 18	600 x 450	087125
	24 x 21	600 x 525	087126
	24	600	087127

Dimension	Product Code	
	inches	mm



Wye B x B x G (Ultra-Rib x Ultra-Rib x DR35 or 28)



Dimension	inches	mm	Product Code
8 x 4	200	100	087250
8 x 5	200	135	087251
8 x 6	200	150	087252
8	200		087253
10 x 4	250	100	087254
10 x 5	250	135	087255
10 x 6	250	150	087256
10 x 8	250	200	087257
10	250		087258
12 x 4	300	100	087259
12 x 5	300	135	087260
12 x 6	300	150	087261
12 x 8	300	200	087262
12 x 10	300	250	087263
12	300		087264
15 x 4	375	100	087265
15 x 5	375	135	087266
15 x 6	375	150	087267
15 x 8	375	200	087268
15 x 10	375	250	087269
15 x 12	375	300	087270
15	375		087271
18 x 4	450	100	087272
18 x 5	450	135	087273
18 x 6	450	150	087274
18 x 8	450	200	087275
18 x 10	450	250	087276
18 x 12	450	300	087277
18 x 15	450	375	087278
18	450		087279
21 x 4	525	100	087235
21 x 5	525	135	087236
21 x 6	525	150	087237
21 x 8	525	200	087238
21 x 10	525	250	087239
21 x 12	525	300	087240
21 x 15	525	375	087241
21 x 18	525	450	087242
21	525		087243
24 x 4	600	100	087360
24 x 5	600	135	087359
24 x 6	600	150	087361
24 x 8	600	200	087362
24 x 10	600	250	087363
24 x 12	600	300	087364
24 x 15	600	375	087365
24 x 18	600	450	087366
24 x 21	600	525	087367
24	600		087368


Dimension	Product Code	
	inches	mm


Wye B x B x B (Ultra-Rib x Ultra-Rib x Ultra-Rib)





Dimension	inches	mm	Product Code
8	200		087280
10 x 8	250	200	087281
10	250		087282
12 x 8	300	200	087283
12 x 10	300	250	087284
12	300		087285
15 x 8	375	200	087286
15 x 10	375	250	087287
15 x 12	375	300	087288
15	375		087289
18 x 8	450	200	087290
18 x 10	450	250	087291
18 x 12	450	300	087292
18 x 15	450	375	087293
18	450		087294
21 x 8	525	200	087295
21 x 10	525	250	087296
21 x 12	525	300	087297
21 x 15	525	375	087298
21 x 18	525	450	087299
21	525		087316
24 x 8	600	200	087317
24 x 10	600	250	087318
24 x 12	600	300	087319
24 x 15	600	375	087320
24 x 18	600	450	087321
24 x 21	600	525	087322
24	600		087323

PRODUCTION SELECTION CHART

	Dimension		Product Code
	inches	mm	
90° Elbow B x B (Ultra-Rib x Ultra-Rib)			
	8	200	087300
	10	250	087301
	12	300	087302
	15	375	087303
	18	450	087304
	21	525	087305
	24	600	087306


	Dimension		Product Code
	inches	mm	
45° Elbow B x B (Ultra-Rib x Ultra-Rib)			
	8	200	087325
	10	250	087326
	12	300	187327
	15	375	087328
	18	450	087329
	21	525	087330
	24	600	087331

	Dimension		Product Code
	inches	mm	
22-1/2° Elbow B x B (Ultra-Rib x Ultra-Rib)			
	8	200	087375
	10	250	087376
	12	300	087377
	15	375	087378
	18	450	087379
	21	525	087380
	24	600	087381

	Dimension		Product Code
	inches	mm	
Increaser B x G (Ultra-Rib x DR35 or 28)			
	8 x 4	200 x 100	087400
	8 x 5	200 x 135	087401
	8 x 6	200 x 150	087402
	10 x 4	250 x 100	087403
	10 x 5	250 x 135	087404
	10 x 6	250 x 150	087405
	10 x 8	250 x 200	087406
	12 x 4	300 x 100	087407
	12 x 5	300 x 135	087408
	12 x 6	300 x 150	087409
	12 x 8	300 x 200	087410
	12 x 10	300 x 250	087411
	15 x 4	375 x 100	087412
	15 x 5	375 x 135	087413
	15 x 6	375 x 150	087414
	15 x 8	375 x 200	087415
	15 x 10	375 x 250	087416
	15 x 12	375 x 300	087417
	18 x 4	450 x 100	087418
	18 x 5	450 x 135	087419
	18 x 6	450 x 150	087420
	18 x 8	450 x 200	087421
	18 x 10	450 x 250	087422
	18 x 12	450 x 300	087423
18 x 15	450 x 375	087424	
21 x 4	525 x 100	087482	
21 x 6	525 x 150	087483	
21 x 8	525 x 200	087484	
21 x 10	525 x 250	087485	
21 x 12	525 x 300	087486	
21 x 18	525 x 450	087488	
24 x 4	600 x 100	087489	
24 x 6	600 x 150	087490	
24 x 8	600 x 200	087491	
24 x 10	600 x 250	087492	
24 x 12	600 x 300	087493	
24 x 15	600 x 375	087494	
24 x 18	600 x 450	087495	
24 x 21	600 x 525	087496	


	Dimension		Product Code
	inches	mm	

Stop Coupling B x B


	8	200	087450
	10	250	087451
	12	300	087452
	15	375	087453
	21	525	087455

	Dimension		Product Code
	inches	mm	

Cap B

	8	200	087500
	10	250	087501
	12	300	087502
	15	375	087503
	18	450	087504
	21	525	087505
	24	600	087506

Repair Coupling B x B

	8	200	087475
	10	250	087476
	12	300	087477
	15	375	087478
	18	450	087479
	21	525	087480
	24	600	087481

Plug SP

	8	200	087525
	10	250	087526
	12	300	087527
	15	375	087528
	18	450	087529
	21	525	087530
	24	600	087531


Gaskets

	8	200	087808
	10	250	087810
	12	300	087812
	15	375	087915
	18	450	087818
	21	525	087821
	24	600	087824

Manhole Adapter (for grout)

	8	200	087550
	10	250	087551
	12	300	087552
	15	375	087553
	18	450	087554
	21	525	087555
	24	600	087556

Standard Perforation Pattern



Hole Size = 9/16" , 14 mm
 Minimum Open Area = 10,000 mm² / m
 Other perforation types available.

Call your IPEX Inc. representative for details


Ultra-Rib to DR 35 Adapter

	8	200	087575
	10	250	087576
	12	300	087577
	15	375	087578
	18	450	087579
	21	525	087580
	24	600	087581

PRODUCTION SELECTION CHART


Dimension	Product Code	
	inches	mm

Wing Adapter (Adapts Ultra-Rib to AC, VCT or concrete Mains)



8	200	087625
10	250	087626
12	300	087627
15	375	087628
18	450	087629
21	525	087630
24	600	087631

Inserta-Tees



8 x 4	200 x 100	087650
10 x 4	250 x 100	087651
10 x 6	250 x 150	087652
10 x 8	250 x 200	087649
12 x 4	300 x 100	087653
12 x 6	300 x 150	087654
12 x 8	300 x 200	087655
12 x 10	300 x 250	**
15 x 4	375 x 100	087656
15 x 6	375 x 150	087657
15 x 8	375 x 200	087658
15 x 12	375 x 300	087648
18 x 4	450 x 100	087660
18 x 6	450 x 150	087661
18 x 8	450 x 200	087662
18 x 10	450 x 250	087663
18 x 12	450 x 300	087664
18 x 15	450 x 375	Available on Request
21 x 4	525 x 100	087665
21 x 6	525 x 150	087666
21 x 8	525 x 200	087667
21 x 10	525 x 250	087668
21 x 12	525 x 300	087674
21 x 15	525 x 375	Available on Request
24 x 4	600 x 100	087669
24 x 6	600 x 150	087670
24 x 8	600 x 200	087671
24 x 10	600 x 250	087672
24 x 12	600 x 300	087685



IPEX
Committed to Excellence

Vortex Flow™
ODOR & CORROSION CONTROL

Looking for a cost-effective solution to sewer odor & corrosion?



Product Information & Benefits



CORROSION CONTROL

By oxidizing dissolved H_2S , a Vortex Flow Insert in a municipal sewer drop can significantly reduce concrete and metal corrosion, extending sewer life and saving the municipality money.

CHEMICAL FREE ODOR CONTROL

By increasing dissolved oxygen levels in wastewater and oxidizing sulfides and other odorous compounds, the Vortex Flow Insert eliminates the need for costly chemical injection, high-maintenance biofilters and air scrubbers.

LOW MAINTENANCE

With no moving parts, the Vortex Flow Insert operates virtually maintenance free dramatically reducing maintenance costs of manholes and sewers.

BUILT-TO-SPEC FOR ANY SIZE

Manholes, chambers and pumping stations are built in a variety of sizes. Each Vortex Flow Insert is custom designed based on the peak flow that the unit is required to handle.

Vortex Flow Inserts from IPEX are a proven method for dealing with odor and corrosion in sewer drops. Simple, cost-effective and reliable, Vortex Flow Inserts have been proven to deliver significant cost savings across North America.

Using the wastewater's own flow energy to suppress turbulence, aerate the sewage and oxidize dissolved hydrogen sulfides (H_2S), the Vortex Flow's patented spiral design sucks odorous gases downward towards the bottom of the structure where they are entrained back into the sewage flow.

Visit www.abettersewer.com to request your FREE conceptual design and learn about this one-time investment, custom designed to suit your specific sewer drop needs.

ULTRA-X2 PIPING SYSTEMS

30" - 36" (750mm - 900mm)

Ultra-X2®

The need for tight joints and reliable structural performance in storm water systems was one of the driving forces in the development of PVC profile pipe. As a result, IPEX's Ultra Rib has become the standard for storm water systems up to 600mm due to its ease of installation, reliable performance and resistance to corrosion and abrasion.

Now IPEX is introducing Ultra-X2: a new dual wall PVC profile pipe that takes the benefits of PVC profile pipe up to 900mm.

APPLICATIONS

- Storm Drainage
- Highway & Culvert
- Sanitary Drainage
- Gravity Industrial Lines

STANDARDS



B182.4



F1282


ADVANTAGES

- 1 Joint Tightness and Infiltration**
Ultra-X2 has extremely tight joints. Even though it is designed as a non-pressure drainage pipe, its joints can withstand a hydrostatic pressure of 15 psi. This allows it to perform even in the toughest conditions – surcharged sewers or high groundwater conditions.
- 2 Ease of Installation**
Ultra-X2 is tough yet lightweight. The corrugated construction reduces pipe weight while maintaining a 46 psi ring stiffness.
- 3 Superior Flow Characteristics**
Because of the smooth inside wall of Ultra-X2, a Manning's number of 0.009 can be used when designing systems using Ultra-X2 pipe. This compares with a Manning's number of up to 0.023 for other materials like clay or concrete.
- 4 Chemical Resistance**
PVC is virtually immune to chemical attack from any type of sewage. Hydrogen sulfide (H₂S), which causes millions of dollars in damage to concrete and metal infrastructure, will not affect Ultra-X2.
- 5 Stress Crack Resistance**
While some HDPE pipes will have been found to crack prematurely under load, Ultra-X2's tough PVC construction has been proven immune to these problems.



DIMENSIONS

Nominal Pipe Size		OD		ID		Crest Wall Thickness		Liner Wall Thickness		Insertion Force
in	mm	in	mm	in	mm	in	mm	in	mm	lbf
30	750	32.15	816.6	29.50	749.2	0.15	3.7	0.22	5.6	985
36	900	38.76	984.6	35.49	901.4	0.13	3.3	0.18	4.6	1000

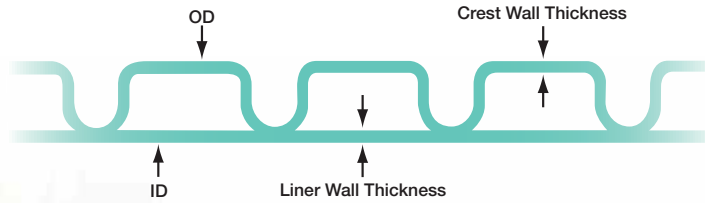

SHORT FORM SPECIFICATIONS

GENERAL

IPEX Ultra-X2 PVC Pipe is available in sizes 750mm and 900mm (30" & 36").

MATERIAL

Ultra-X2 PVC Pipe shall be made of PVC compound having a cell classification of 12454B as defined in ASTM D1784B.

PRODUCT

Ultra-X2 PVC pipe and fittings shall be certified to CSA B182.4 "Profile PVC Sewer Pipe and Fittings", and shall meet the requirements of ASTM F794 "Standard Specification for Poly (Vinyl chloride) (PVC) Profile Gravity Sanitary Pipe and Fittings Based on Controlled Inside Diameter".

PIPE STIFFNESS

Pipe stiffness must be 320 kPa (46 lbs/in of sample length per inch of deflection) at 5% vertical deflection when tested according to ASTM D2412.

LUBRICANT

Assembly of Ultra-X2 pipe shall be done in accordance with the manufacturer's directions using only IPEX PVC pipe lubricant. Substitute lubricants shall not be used. IPEX lubricant shall be applied to the inside of the bell to be joined, to a uniform thickness for a distance inside the bell equivalent to three corrugated profiles from the outside edge.

COLOUR CODING

Pipe shall be colour-coded green.

PRODUCTION SELECTION CHART


Dimension		Product Code
inches	mm	

Ultra-X2 Profile Pipe (320 kPa (46 psi))




30	750	186030
36	900	186036

Sewer Tee (Ultra-Rib x X2 x Swr Tee H x H x G)



30 x 30 x 4	750 x 750 x 100	187000
30 x 30 x 6	750 x 750 x 150	187001
30 x 30 x 8	750 x 750 x 200	187002
30 x 30 x 10	750 x 750 x 250	187003
30 x 30 x 12	750 x 750 x 300	187004
30 x 30 x 15	750 x 750 x 375	187005
30 x 30 x 18	750 x 750 x 450	187006
30 x 30 x 21	750 x 750 x 525	187007
30 x 30 x 24	750 x 750 x 600	187008
30 x 30 x 30	750 x 750 x 750	187009
36 x 36 x 4	900 x 900 x 100	187032
36 x 36 x 6	900 x 900 x 150	187033
36 x 36 x 8	900 x 900 x 200	187034
36 x 36 x 10	900 x 900 x 250	187035
36 x 36 x 12	900 x 900 x 300	187036
36 x 36 x 15	900 x 900 x 375	187037
36 x 36 x 18	900 x 900 x 450	187038
36 x 36 x 21	900 x 900 x 525	187039
36 x 36 x 24	900 x 900 x 600	187040
36 x 36 x 30	900 x 900 x 750	187041
36 x 36 x 36	900 x 900 x 900	187042


Sewer Tee (Ultra-Rib x X2 x Ultra-Rib x X2 H x H x H)



30 x 30 x 8	750 x 750 x 200	187061
30 x 30 x 10	750 x 750 x 250	187062
30 x 30 x 12	750 x 750 x 300	187063
30 x 30 x 15	750 x 750 x 375	187064
30 x 30 x 18	750 x 750 x 450	187065
30 x 30 x 21	750 x 750 x 525	187066
30 x 30 x 24	750 x 750 x 600	187067
30 x 30 x 30	750 x 750 x 750	187068
36 x 36 x 8	900 x 900 x 200	187078
36 x 36 x 10	900 x 900 x 250	187079
36 x 36 x 12	900 x 900 x 300	187080
36 x 36 x 15	900 x 900 x 375	187081
36 x 36 x 18	900 x 900 x 450	187082
36 x 36 x 21	900 x 900 x 525	187083
36 x 36 x 24	900 x 900 x 600	187084
36 x 36 x 30	900 x 900 x 750	187085
36 x 36 x 36	900 x 900 x 900	187086


Dimension		Product Code
inches	mm	

Sewer Wye (Ultra-Rib x X2 x Swr Wye H x H x G)



30 x 30 x 4	750 x 750 x 100	187010
30 x 30 x 6	750 x 750 x 150	187011
30 x 30 x 8	750 x 750 x 200	187012
30 x 30 x 10	750 x 750 x 250	187013
30 x 30 x 12	750 x 750 x 300	187014
30 x 30 x 15	750 x 750 x 375	187015
30 x 30 x 18	750 x 750 x 450	187016
30 x 30 x 21	750 x 750 x 525	187017
30 x 30 x 24	750 x 750 x 600	187018
30 x 30 x 30	750 x 750 x 750	187019
36 x 36 x 4	900 x 900 x 100	187043
36 x 36 x 6	900 x 900 x 150	187044
36 x 36 x 8	900 x 900 x 200	187045
36 x 36 x 12	900 x 900 x 300	187046
36 x 36 x 15	900 x 900 x 375	187047
36 x 36 x 18	900 x 900 x 450	187048
36 x 36 x 21	900 x 900 x 525	187049
36 x 36 x 24	900 x 900 x 600	187050
36 x 36 x 30	900 x 900 x 750	187051
36 x 36 x 36	900 x 900 x 900	187052

Sewer Wye (Ultra-Rib x X2 x Swr Wye H x H x H)



30 x 30 x 8	750 x 750 x 200	187087
30 x 30 x 10	750 x 750 x 250	187088
30 x 30 x 12	750 x 750 x 300	187089
30 x 30 x 15	750 x 750 x 375	187090
30 x 30 x 18	750 x 750 x 450	187091
30 x 30 x 21	750 x 750 x 525	187092
30 x 30 x 24	750 x 750 x 600	187093
30 x 30 x 30	750 x 750 x 750	187094
36 x 36 x 8	900 x 900 x 200	187069
36 x 36 x 10	900 x 900 x 250	187070
36 x 36 x 12	900 x 900 x 300	187071
36 x 36 x 15	900 x 900 x 375	187072
36 x 36 x 18	900 x 900 x 450	187073
36 x 36 x 21	900 x 900 x 525	187074
36 x 36 x 24	900 x 900 x 600	187075
36 x 36 x 30	900 x 900 x 750	187076
36 x 36 x 36	900 x 900 x 900	187077


Ultra-X2 Cap H



30	750	187020
36	900	187053


	Dimension		Product Code
	inches	mm	

Ultra-X2 Plug




	30	750	187021
	36	900	187054

Ultra-X2 Coupling H x H



	30 w/o stop	750	187022
	36 w/o stop	900	187024
	30 w stop	750	187023
	36 w stop	900	187025


Ultra-X2 22-1/2° Bends H x H



	30	750	187026
	36	900	187029


	Dimension		Product Code
	inches	mm	

Ultra-X2 45° Bends H x H



	30	750	187027
	36	900	187030

Ultra-X2 90° Bends H x H



	30	750	187028
	36	900	187031

Ultra-X2 Inserta Tees

	30 x 4	750 x 750 x 100	187055
	30 x 6	750 x 750 x 150	187056
	30 x 8	750 x 750 x 200	187057
	36 x 4	900 x 900 x 100	187058
	36 x 6	900 x 900 x 150	187059
	36 x 8	900 x 900 x 200	187060

Visit our website: www.ipexna.com



PRODUCT INFO
TECHNICAL DOCUMENTS
& MUCH MORE ...

+ DOWNLOAD

OUR PRESSURE PIPING
SYSTEMS & SEWER PIPING
SYSTEMS DESIGN MANUALS



NOVAFORM PVC LINER

For 6" - 15" (150mm - 350mm) diameters

NOVAFORM™

Across North America, aging sewer and water infrastructure has reached a critical juncture. In many cases repair and replacement is long overdue, which has led to ever increasing operating costs for municipalities. As a result, the need for a durable and cost-efficient pipe rehabilitation solution has never been more paramount. The engineers at IPEX recognized this need and have responded with NovaForm™ PVC Liner, a product that brings the lasting benefits of factory-made PVC pipe to the North American trenchless pipe rehabilitation industry.

Being made from PVC, NovaForm PVC Liner is highly-resistant to chemicals and offers excellent abrasion- and scratch-resistance properties. The smooth interior surface of PVC translates into improved hydraulic properties as well. Best of all, PVC is a sustainable pipe material which means NovaForm provides an industry leading service life.

ADVANTAGES

- 1 Flexible, Durable, Reliable & Cost-Efficient**
The finished NovaForm PVC Liner product provides the same proven benefits of standard PVC pipe.
- 2 Availability**
From corroded sanitary sewers to deteriorated corrugated steel pipes in need of structural repair, NovaForm PVC Liner is available in the sizes 6" to 15" and industry-standard DR 35 and DR 41.
- 3 Trenchless Benefits**
With NovaForm PVC Liner you benefit from the many advantages of a modern trenchless rehabilitation technology including: time savings, the ability for local businesses and roads to remain open during operation, potential cost savings and reduced environmental impact over traditional open-cut methods.
- 4 Factory Made & Quality Controlled**
- 5 Smooth Interior Surface**
- 6 Excellent Chemical Resistance**

APPLICATIONS

- Sewer Rehabilitation
- Culbert Rehabilitation

STANDARDS



F1871



DID YOU KNOW?

Non-corroding and installation friendly PVC piping systems have become the material of choice for potable water and sewer infrastructure across North America.

70

NOVAFORM PVC LINER



SHORT FORM SPECIFICATIONS

GENERAL

NovaForm PVC Liner is available in sizes 150mm to 350mm (6" & 15").

MATERIAL

The Pipe shall be made from PVC compound meeting all the requirements for cell classification of 12111 as defined in specification ASTM D1784 and with minimum physical properties.

PRODUCT

Pipe Flattening: There shall be no evidence of splitting, cracking or breaking when the rounded pipe is tested according to section 11.3 of ASTM F1871.

Pipe Impact Strength: The impact strength of rounded pipe shall not be less than the values when tested in accordance with test method D2444 as referenced in ASTM F1871.

PIPE STIFFNESS

Values for pipe stiffness for the rounded pipe shall comply when tested in accordance with test method D2412 as referenced in ASTM F1871.

EXTRUSION QUALITY

The extrusion quality of the pipe shall be evaluated by the following test methods:

Acetone Immersion: The pipe shall not flake or disintegrate when tested in accordance with test method D2152 as referenced in ASTM F1871.

Heat Reversion: The extrusion quality of the pipe shall be estimated by heat reversion method in accordance with practice F1057 as referenced in ASTM F1871.

Flexural Properties: The flexural strength and modulus of the pipe shall be tested in accordance with test method D790 as referenced in ASTM F1871.

COLOUR CODING

PVC Liner shall be colour-coded white.

DIMENSIONS

Nominal Pipe Size		Dimension Ratio	Maximum Lengths
in	mm	in	(4' x 4' Reel)
6	150	35	1350
8	200	35	950
10	250	35	550
12	300	35	350
15	350	35	350

18	450	41	325
24	600	41	150
30	750	41	125

coming soon!



SOLVENT WELD SEWER FITTINGS

3" - 8" (76mm - 200mm)
8" - 15" (200mm - 380mm)

IPEX offers a wide variety of moulded sewer fittings 3" in diameter and larger. Solvent welded fittings are typically installed in sanitary and drainage systems. Injection-moulded fittings are available in 3" to 8" sizes. Fabricated DR35 solvent weld sewer fittings are available in 8" to 15" sizes.

SOLVENT WELD VS. GASKETED JOINTS

Solvent welding is a process by which a joint is made by chemically fusing together a pipe and a fitting. A solvent is applied to the surface of a PVC pipe spigot and the inside of a matching bell. In some cases a primer may be used to prepare the surfaces. The solvent dissolves some of the chemical bonds in the PVC material, effectively "melting" the material. Once the two surfaces are pushed together the material from the two surfaces begin to fuse together. As the joint cures, the solvent evaporates and the joint becomes stronger, until it essentially becomes a continuous pipe.

Solvent welded joints are able to resist large tensile loads and will not pull apart. In fact, it can be shown that the pipe itself will fail before the joint will.

APPLICATIONS

- Gravity Flow Sanitary Sewers
- Storm Sewers
- Sewer Laterals

STANDARDS



D3034



B182.1
B182.2



File 2431
(4", 6" & 8")

ADVANTAGES


1 Leak-Proof Joints
Properly installed DR35 solvent weld sewer fittings provide leak-proof joints. This eliminates underground water infiltration and exfiltration. The results: substantial savings in sewage treatment costs for municipalities.

2 Superior Chemical Resistance
The chemical resistance of SDR35 sewer fittings is exceptional. Acids, alkalies and normally diluted hydrocarbons have little or no effect. Aggressive soil conditions due to sulfates, carbonates, industrial effluents and acid rain are easily handled by DR35 solvent weld sewer fittings.


3 Super Abrasion Resistance
SDR35 solvent weld sewer fittings are highly resistant to abrasion, making them ideal for transporting abrasive effluent, even in high velocity storm sewer systems.





PRODUCT SELECTION CHART

	Dimension		Product Code
	inches	mm	
Tee H x H x H			
	3	76	040102
	4	100	040104
	4 x 3	100 x 76	040109
	6	150	040106
	6 x 4	150 x 100	040105
	8	200	040108
	8 x 4	200 x 100	040117
	8 x 6	200 x 150	040118
*	10	250	040111
*	10 x 4	250 x 100	040119
*	10 x 6	250 x 150	040120
*	10 x 8	250 x 200	040121
*	12	300	040112
*	12 x 4	300 x 100	040122
*	12 x 6	300 x 150	040123
*	12 x 8	300 x 200	040124
*	12 x 10	300 x 250	040125
*	15	375	040113
*	15 x 6	375 x 150	040128
*	15 x 8	375 x 200	040126
*	15 x 10	375 x 250	040083
*	15 x 12	375 x 300	040127
*	18	450	040115
*	18 x 6	450 x 150	040091
*	18 x 8	450 x 200	040092
*	18 x 15	450 x 375	040919


* Fabricated Fitting

	Dimension		Product Code
	inches	mm	
Cleanout Tee H x H x FPT			
	4	100	040922


	Dimension		Product Code
	inches	mm	
2-Way Cleanout			
	4	100	040350


	Dimension		Product Code
	inches	mm	
Cross Tee H x H x H x H			
	3	76	040975
	4	100	040976
*	6	150	040915
*	8	200	040828
*	12	300	040010

* Fabricated Fitting

	Dimension		Product Code
	inches	mm	
Tee Wye H x H x H			
	3	76	040155
	4	100	040156
	6	150	040159
	6 x 4	150 x 100	040158
*	8	200	040801
*	8 x 4	200 x 100	040129
*	8 x 6	200 x 150	040110

* Fabricated Fitting


	Dimension		Product Code
	inches	mm	
Tee Wye S x H x H			
	4	100	040157

	Dimension		Product Code
	inches	mm	
Saddle Tee (solvent skirt and branch)			
	4 on 6	100 on 150	040775
	4 on 8	100 on 200	040776
	4 on 12	100 on 300	040804
	6 on 8	150 on 200	040779
	6 on 10	150 on 250	040081
	6 on 12	150 on 300	040841
	6 on 15	150 on 375	040914
	8 on 12	200 on 300	040840
	10 on 12	250 on 300	040097

PRODUCTION SELECTION CHART

Dimension		Product Code
inches	mm	


45° Wye H x H x H



3	76	040302
3 x 2	76 x 50	040303
4	100	040304
4 x 2	100 x 50	040308
4 x 3	100 x 76	040309
6	150	040306
6 x 4	150 x 100	040307
8	200	040311
8 x 4	200 x 100	040310
8 x 6	200 x 150	040312
* 10	250	040313
* 10 x 4	250 x 100	040315
* 10 x 6	250 x 150	040316
* 10 x 8	250 x 200	040317
* 12	300	040314
* 12 x 4	300 x 100	040305
* 12 x 6	300 x 150	040319
* 12 x 8	300 x 200	040320
* 12 x 10	300 x 250	040321
* 15	375	040325
* 15 x 4	375 x 100	040040
* 15 x 6	375 x 150	040323
* 15 x 8	375 x 200	040326
* 15 x 10	375 x 250	040327
* 15 x 12	375 x 300	040324


* Fabricated Fitting

45° Wye S x H x H



3	76	040332
4	100	040334
6	150	040338

45° Double Wye



6 x 4	150 x 100	040172
6	150	040331
* 8 x 4	200 x 100	040170
* 8 x 6	200 x 150	040030
* 8	200	040050
* 10 x 8	250 x 200	040031
* 10	250	040018
* 12 x 10	300 x 250	040328
* 12	300	040329

* Fabricated Fitting


Dimension		Product Code
inches	mm	

Saddle Wye (solvent skirt and branch)




4 on 6	100 on 150	040785
4 on 8	100 on 200	040786
4 on 10	100 on 250	040777
4 on 12	100 on 300	040787
6 on 8	150 on 200	040788
6 on 15	150 on 375	040675
8 on 24	200 on 600	040087

90° Elbow H x H (long turn)




3	76	040255
4	100	040214
6	150	040280
8	200	040036

90° Elbow S x H (long turn)



3	76	040272
4	100	040234
6	150	040282
8	200	040283


90° Elbow H x H



3	76	040037
4	100	040256
6	150	040206
8	200	040208
10	250	040260
* 12	300	040261
* 15	350	040262
* 18	450	040263
* 24	600	040075

* Fabricated Fitting

90° Elbow S x H




4	100	040274
6	150	040236
8	200	040237
* 12	300	040258
* 15	350	040103

* Fabricated Fitting

	Dimension		Product Code
	inches	mm	

45° Elbow H x H



3	76	040502
4	100	040504
6	150	040506
8	200	040508
* 10	250	040407
* 12	300	040409
* 15	375	040410
* 18	450	040411
* 24	600	040399

* Fabricated Fitting

45° Elbow S x H



3	76	040402
4	100	040404
6	150	040406
8	200	040408
* 10	250	040412
* 12	300	040413
* 15	375	040414
* 18	450	040405

* Fabricated Fitting

22-1/2° Elbow H x H



3	76	040963
4	100	040964
6	150	040969
8	200	040970
* 10	250	040971
* 12	300	040973
* 15	375	040974
* 18	450	040042

* Fabricated Fitting

22-1/2° Elbow S x H




4	100	040864
6	150	040866
* 18	450	040977

* Fabricated Fitting

	Dimension		Product Code
	inches	mm	


Increaser Coupling H x H



4 x 2	100 x 50	040656
4 x 3	100 x 76	040654
6 x 4	150 x 100	040661
* 8 x 4	200 x 100	040610
8 x 6	200 x 150	040611
* 10 x 4	250 x 100	040613
* 10 x 6	250 x 150	040614
* 10 x 8	250 x 200	040615
* 12 x 4	300 x 100	040616
* 12 x 6	300 x 150	040617
* 12 x 8	300 x 200	040618
* 12 x 10	300 x 250	040619
* 15 x 4	375 x 100	040620
* 15 x 6	375 x 150	040621
* 15 x 8	375 x 200	040622
* 15 x 10	375 x 250	040623
* 15 x 12	375 x 300	040627
* 18 x 10	450 x 250	040101
* 18 x 15	450 x 375	040630
* 21 x 18	600 x 450	040086

* Fabricated Fitting


Coupling w Stop H x H



2	50	040600
3	76	040602
4	100	040604
6	150	040606
8	200	040631
* 10	250	040608
* 12	300	040612
* 15	375	040609
* 18	450	040603
* 24	600	040078

* Fabricated Fitting

Repair Coupling H x H




4	100	040624
6	150	040626

PRODUCTION SELECTION CHART

	Dimension		Product Code
	inches	mm	

	Dimension		Product Code
	inches	mm	


Extended Bushing S x H



6 x 4	150 x 100	040939
8 x 4	200 x 100	040897
8 x 6	200 x 150	040940
* 10 x 4	250 x 100	040898
10 x 6	250 x 150	040899
* 10 x 8	250 x 200	040900
* 12 x 6	300 x 150	040902
* 12 x 8	300 x 200	040903
* 12 x 10	300 x 250	040904
* 15 x 10	375 x 250	040905
* 15 x 12	375 x 300	040906
* 18 x 12	450 x 300	040913
* 18 x 15	450 x 375	040908


* Fabricated Fitting

Extended Adapter Bushing (Sewer Spigot x DWV Hub)



4 x 3	100 x 76	040934
6 x 4	150 x 100	040941

Adapter Sleeve (Sewer Hub x DWV Spigot)



4	100	040342
12	300	040207

Cast Iron Spigot Adapter H x H




4 x 4	100 x 100	040704
-------	-----------	--------

Reducer Bushing S x H




4 x 3	100 x 76	040933
6 x 4	150 x 100	040896

Reducer Bushing S x FPT



4 x 1-1/2	100 x 38	040416
-----------	----------	--------

Adapter (Sewer Spigot x DWV Hub)



4	100	040728
4 long	100 long	040808
6	150	040729
* 18	450	040340

* Fabricated Fitting

Adapter Coupling (Sewer Hub x DWV Hub)



4 x 3	100 x 76	040655
4 x 4	100 x 100	040725
6 x 4	150 x 100	040727
6 x 6	150 x 150	040756

Male Adapter Hub x MPT



4	100	040723
---	-----	--------


Female Adapter Hub x FPT



3	76	040948
4	100	040949
6	150	040952
8	200	040945
* 10	250	040946
* 12	300	040947

* Fabricated Fitting

Adapter Bushing (Sewer Spigot x DWV Hub)



3 x 1-1/2	76 x 38	040932
3 x 2	76 x 50	040341
4 x 2	100 x 50	040935

	Dimension		Product Code
	inches	mm	

Cleanout Adapter (Spigot x FPT)



	3	76	040953
	4	100	040954
	6	150	040956
*	8	200	040955
*	10	250	040931
*	12	300	040173

* Fabricated Fitting

	Dimension		Product Code
	inches	mm	


Threaded Plug (Countersunk)



	4	100	040492
	6	150	040958
*	8	200	040044
*	10	250	040928
*	12	300	040929


* Fabricated Fitting

Cleanout (Spigot x MPT /w threaded cap)




	6	150	063750
--	---	-----	--------

Cleanout (Hub x MPT /w threaded cap)



	6	150	063760
--	---	-----	--------


Solvent Cap



	3	76	040986
	4	100	040959
	6	150	040988
	8	200	040990
	10	250	040995
	12	300	040996
	15	375	040997
*	18	450	040998
*	21	525	040985
*	24	600	040917

* Fabricated Fitting

Closet Flange (Countersunk)



	4	100	040965
--	---	-----	--------

Offset Downspout Adapter



2 x 3 x 4	50 x 78 x 100	040765
3 x 4 x 4	78 x 100 x 100	040767
4 x 6 x 6	100 x 150 x 150	040766


Downspout Adapter



H2 x 3 x 3	50 x 78 x 78	040013
H2 x 3 x 4	50 x 78 x 100	040961
H3 x 4 x 4	78 x 100 x 100	040962
* H4 x 4 x 4	100 x 100 x 100	040972
H4 x 6 x 6	100 x 150 x 150	040943
H6 x 6 x 6	150 x 150 x 150	040944

* Fabricated Fitting

MPT Plug



	3	76	040423
	4	100	040424
	6	150	040926
	8	200	040927

Drain Grate



	3	78	040811
	4	100	040911
	6	150	040912



NEXT GENERATION STORMWATER FLOW CONTROL



CONTROL BACK-UPS & CSO'S DURING PEAK FLOW EVENTS WITH TEMPEST™ INLET CONTROL DEVICES



TEMPEST LMF

The Tempest LMF system features a vortex inlet design that allows a low flow rate to be set and eliminates the passage of odors and floatables and allows for debris and sediment to collect in the structure.



TEMPEST HF

The standard Tempest HF system allows a near constant discharge rate to be set and eliminates the passage of odors and floatables and allows for debris and sediment to collect in the structure.



TEMPEST MHF

The Tempest MHF is a standard orifice plate device designed to allow a specified flow volume through the outlet pipe at a specified head.



TEMPEST HF SUMP

The Tempest HF SUMP system is designed for catch basins & manholes in

which there is no sump or the outlet pipe is too low to install a standard Tempest device.

Request your
FREE
Conceptual
Design
today!

For unique municipal applications IPEX has developed equally unique solutions. From advanced odour control and improved wastewater quality products such as our Vortex Flow™ to Tempest Inlet Control Devices, IPEX has your engineered solution.

SPECIALTY PRODUCTS



Vortex Flow Inserts

80

LifeSaver Manhole
& Catchbasin Adjustment Units

82

Storm Sewer Inlet Controls

84



VORTEX FLOW INSERT FOR ODOUR & CORROSION CONTROL

Vortex Flow™

Hydrogen sulfide (H₂S) gas and other odorous gases are a fact of life with sanitary sewer drop structures. When these gases become airborne, they not only generate complaints from the neighbourhood, but also impact air quality and cause corrosion within the sewer system.

The IPEX Vortex Flow Insert (VFI) offers a revolutionary new technology to eliminate odorous emissions and minimize corrosion in vertical sewer drops. With no moving parts and requiring virtually no maintenance, VFIs have delivered significant cost savings in installations across North America.

The patented spiral flow design eliminates odorous and corrosive gases in a unique way by using the wastewater's own flow energy to suppress the turbulence which releases noxious gases. The spiral flow creates a downdraft to trap airborne gases and force air into the sewage flow, oxidizing the odorous gases. By installing a Vortex drop structure, municipalities can save thousands of dollars in monthly chemical feed, air-phase treatment and maintenance costs.

APPLICATIONS

- Manholes, Chambers and Forcemains
- Pumping Station Wet Wells
- Steep Grade Sewers
- Turbine discharges



DID YOU KNOW?

Dr. Eugene Natarius, creator of the Vortex Drop Structure, received a Technical Innovation Award from the American Public Works Association for this revolutionary design.



ADVANTAGES

- 1 Reduced Corrosion Extends Sewer Life**
Hydrogen sulfide (H₂S) emissions from forcemain discharges can literally eat through a concrete drop manhole. By oxidizing dissolved H₂S, a Vortex Flow Insert can significantly reduce concrete and metal corrosion, extending sewer life and saving the municipality money.
- 2 Eliminates Odour Treatment Costs**
By increasing dissolved oxygen levels in wastewater and oxidizing sulfides and other odorous compounds, the use of a Vortex Flow Insert in a drop structure eliminates the need for costly chemical injection, high-maintenance biofilters and air scrubbers.
- 3 Improves Waste Water Quality**
Because a Vortex drop structure reduces the odorous and corrosive elements in the flow, a Vortex Flow Insert, installed upstream of a treatment plant, can actually improve wastewater quality prior to treatment, reducing treatment costs at sewage plants.

- 4 Reduced Maintenance Costs**
The use of a Vortex drop structure eliminates the corrosion of concrete and metal sewer components, dramatically reducing municipal maintenance costs of manholes and sewers.

- 5 Built-to-Spec for Any Size**
Manholes, chambers and pumping stations are built in a variety of sizes. For that reason, IPEX custom designs and builds every Vortex Flow Insert based on the peak flow that the unit is required to handle.




SHORT FORM SPECIFICATIONS

All sanitary sewer drops of five feet or more in manholes or pumping stations shall be equipped with Vortex Flow Drop structures as manufactured by IPEX Inc.

Vortex units must be fabricated using AWWA C900 or AWWA C905 pipe, as well as PVC sheet conforming to ASTM D1248.

Vortex drop structures must be supplied with shop drawings approved by the Project Engineer, as well as installation instructions. The hydraulic capacity of the unit (both minimum and maximum flows) must be clearly indicated in the submission.

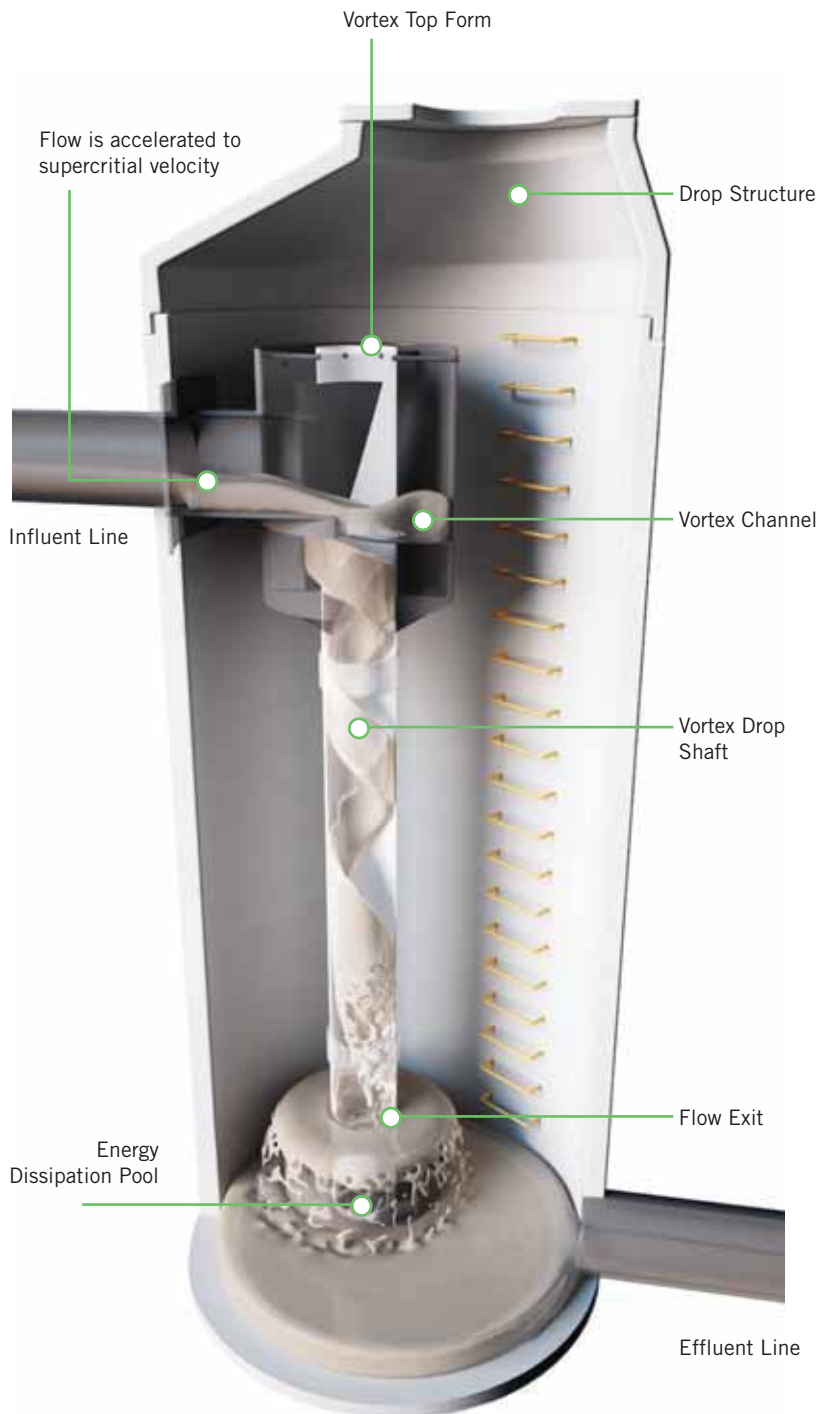

HOW IT WORKS

1. Vortex Top Form



Wastewater flows into the Vortex Top Form directing the flow around a channel of decreasing radius. At the same time, the Vortex channel slopes downward to accelerate the wastewater to a supercritical velocity.

2. Vortex Drop Shaft



Once in the smaller Drop Shaft, the velocity and centrifugal forces generated cause the flow to hug the inside walls of the Drop Shaft. This spiraling flow creates a negative air core, drawing airborne gases down to the Energy Dissipation Pool.

3. Energy Dissipation Pool



The flow exit is submerged in the Energy Dissipation Pool at the bottom of the Vortex. Air and gases drawn down the air core are forced back through the wastewater and re-entrained into the flow. This significantly increases the dissolved oxygen concentration, and the odorous compounds are quickly oxidized.

To receive a conceptual design for a Vortex Flow Insert, go to www.ipexinc.com & complete the design information form

LIFESAVER MANHOLE & CATCHBASIN ADJUSTMENT UNITS



Lifesavers are high impact HDPE adjustment units designed to bring manhole and catchbasin castings up to the exact height of the asphalt or concrete surface of a roadway. These units cushion the impact loads between the cast iron casting and the concrete manhole or catchbasin structure, while eliminating infiltration and undermining. This extends the life of the surrounding roadway.

APPLICATIONS

- Grade adjustments for manholes, catchbasins as well as electrical, telephone and other utility vaults
- High Traffic Areas

STANDARDS



D1248

ADVANTAGES

1



No Mortar Required

No more field mixing mortar. Now you can reduce overhead by eliminating your concrete mixer, trailers of sand, mortar mix and water supply – and eliminate inconsistent mixes from batch to batch.

And because there's no need to wait for mortar to harden, installations can be backfilled and compacted as soon as the casting is in place.

2

Withstands Excessive Loads

Costly restoration from the settlement and break up of road surfaces around castings and manhole rings is a thing of the past. No more migration of fine soils through deteriorated mortar and concrete rings. Lifesaver rings are designed and tested to withstand loading well in excess of standard H 20 loads.

3

Impervious to Corrosion

The Lifesaver system includes both flat and slope rings to allow precise adjustment to grade. And, unlike concrete, Lifesaver rings are impervious to corrosion from Hydrogen Sulphide gas (H₂S), common in sanitary sewers.

4

Lightweight and Easy to Handle

Unlike heavy concrete sewer components, labour saving Lifesaver manhole rings and catchbasin frames weigh a mere six pounds, so they are extremely easy to carry and handle. What's more, their consistent shape and durable, warp-free construction make installation precisely to grade a snap!



DID YOU KNOW?


HDPE is able to absorb the shock from traffic loads without cracking, and has the structural strength to handle high static loads in excess of 50,000 lbs.



PRODUCT SELECTION CHART

Manhole Adjustment Units

Size	Description	Product Code
24 x 4"	Flat Manhole Adjustment Unit	074140
24 x 2"	Flat Manhole Adjustment Unit	074141
24 x 1-1/2"	Flat Manhole Adjustment Unit	074142
24 x 1-1/4"	Flat Manhole Adjustment Unit	074143
24 x 1-1/2"	Sloped Adjustment Unit	074144
27 x 2"	Flat Manhole Adjustment Unit	074145
27 x 1-1/2"	Flat Manhole Adjustment Unit	074146
27 x 1-1/4"	Flat Manhole Adjustment Unit	074147
27 x 1-1/2"	Sloped Adjustment Units	074148
27 x 4"	Flat Manhole Adjustment Unit	074245
30 x 2-1/4"	Flat Manhole Adjustment Unit	074001
30 x 4"	Flat Manhole Adjustment Unit	074002
30 x 1-1/2"	Sloped Adjustment Unit	074003
30 x 1-1/2"	Flat Manhole Adjustment Unit	074007



Catchbasin Adjustment Units (24" x 24")

Description	Product Code
3% Sloped Catchbasin Adjustment Unit	074330
6% Sloped Catchbasin Adjustment Unit	074157
1-1/2" Flat Catchbasin Adjustment Unit	074075
2" Flat Catchbasin Adjustment Unit	074076
2-3/4" Flat Catchbasin Adjustment Unit	074077

Catchbasin Adjustment Units (24" x 36")

Description	Product Code
1% Sloped Catchbasin Adjustment Unit	074997
1-1/2" Flat Catchbasin Adjustment Unit	074994
2" Flat Catchbasin Adjustment Unit	074995
2-3/4" Flat Catchbasin Adjustment Unit	074996



STORM SEWER INLET CONTROLS



PROBLEM: SURCHARGED SEWER SYSTEMS

During heavy rain events, storm sewers can become overloaded causing sewer backups into residential basements and onto urban environments and streets. These events cause significant environmental and property damage and are all too common in older sections of municipalities where combined, undersized sewer systems often end up discharging a mixture of storm water runoff and sanitary wastewater into homes, streets and lakes when sewer capacities exceed historical norms. Traditional approaches to overcoming these challenges have been expensive, disruptive and time consuming for municipalities and the private sector.

SOLUTION: TEMPEST INLET CONTROL SYSTEMS

- Provides control by restricting flow into the sewer system
- Provides temporary ponding in catch basins, parking lots & roadways
- Helps preserve sewer capacity, slows down the inlet flow
- Reduces residential flooding and flash flooding
- Water surcharge is controlled & directed as per engineer design
- Can accommodate outlet pipes 6" and larger

APPLICATIONS

- Parking Lots
- Roads
- Areas where main line storm sewer capacity must be managed



DID YOU KNOW?

Tempest ICDs have a quick release mechanism that's accessed with a reach bar. The units can then be simply lifted out for easy maintenance. (Excluding Tempest HF Sump)

ADVANTAGES

1 Reduces Sewer Overflows and Basement Backups

Tempest is a family of cost-effective inlet control devices that work together across a series of catch basins to limit the amount of storm water runoff that can enter a combined sewer system during a storm event. Basement backups and sewer overflows are avoided because storm water surcharges are controlled at the sewer inlet and are allowed to remain in catch basins or temporarily above ground.

2 Integrated Odour and Floatable Control

In addition to flow control, Tempest systems can also alleviate sewer system odour emissions as well as prevent floating debris from entering the sewer system.

3 Wide Range of Models & Pre-set Flow Rates

Available in a wide range of patent pending models and pre-set flow rates, Tempest systems can accommodate most storm water flow control requirements from 2 lps to 17 lps and beyond. Application specific solutions can also be engineered to meet your unique needs in both wet and dry catch basin environments.

4 Easy to Install and Maintain

Constructed from durable PVC, Tempest units are corrosion free and built to last. The Tempest's light weight design accommodates both square and round catch basins and features a universal back plate and interchangeable components with no moving parts that makes the units quick and easy to install over a catch basin outlet pipe. These devices also include a quick release mechanism to allow easy access for service without the need to drain the installation.



THE TEMPEST FAMILY OF SYSTEMS

TEMPEST LMF

- Restricts:
- ✓ Flow
 - ✓ Odours
 - ✓ Floatables



LOW to MODERATE FLOW RATES
2 L/s (32 GPM) – 17 L/s (270 GPM)

14 pre-set flow rates

The Tempest LMF system features a vortex inlet design that allows a low flow rate to be set and eliminates the passage of odours and floatables and allows for debris and sediment to collect in the structure.

TEMPEST HF & HF SUMP

- Restricts:
- ✓ Flow
 - ✓ Odours
 - ✓ Floatables



HIGH FLOW RATES
15L/s (240 GPM) or greater

5 pre-set flow rates

The standard Tempest HF system allows a near constant discharge rate to be set and eliminates the passage of odours and floatables and allows for debris and sediment to collect in the structure.

The Tempest HF SUMP system is designed for catch basins & manholes in which there is no sump or the outlet pipe is too low to install a standard Tempest devices.

TEMPEST MHF

- Restricts:
- ✓ Flow



MEDIUM TO HIGH FLOW RATES
9L/s (143 GPM) or greater

Specified pre-set flow rates

The Tempest MHF is a standard orifice plate device designed to allow a specified flow volume through the outlet pipe at a specified head.

UNIVERSAL BACK PLATES

AVAILABLE FOR BOTH SQUARE
AND ROUND CATCH BASINS
(excluding Tempest HF Sump)



For square
catch basins




For round
catch basins

PRODUCTION SELECTION CHART

Description

LMF ICD



Square catch basin adapter
 Round catch basin adapter

Low to medium flow
 Restricts flow to 2 Lps - 17 Lps
 14 preset flow rates
 Floatable and odour control
 Supplied with neoprene gasket

HF ICD and Odour Traps ICD



HF square catch basin adapter
 HF round catch basin adapter
 Odour trap square catch basin adapter
 Odour trap round catch basin adapter

Hi flow
 Restricts flow to 15 Lps & >
 5 preset flow rates
 Floatable and odour control
 Supplied with neoprene gasket
 Option for odour trap only, no flow restriction

MHF Plate ICD



Square catch basin adapter
 Round catch basin adapter

Medium to high flow
 Restricts flow to 9 Lps and >
 5 preset flow rates
 Supplied with neoprene gasket


MHF Plug ICD



8"
 10"
 12"

Medium to high flow
 Restricts flow to 9 Lps and >
 5 preset flow rates

HF Sump ICD



Square catch basin adapter
 Round catch basin adapter

High flow
 Creates a sump
 Restricts flow to 15 Lps and >
 5 preset flow rates
 Floatable and odour control

Description

TEMPEST Devices



Universal mounting plate hub adapter
 LMF device
 HF device
 8" odour trap
 MHF plate device

If a universal mounting plate already exists in the structure:
 Choose an ICD device only for a square structure
 Choose the universal mounting plate hub adapter and ICD device for a round structure

Please contact your local IPEX representative for sizing of a TEMPEST ICD and a quotation

NOTES: In order to assist in choosing the proper TEMPEST ICD and for proper sizing and a quotation, the following information will be required when contacting IPEX for a TEMPEST ICD:

1. Feature(s) requirement: flow, floatable control, odour control
2. Flow requirement
3. Water height (Head / m)
4. Depth of sump / height of outlet pipe
5. Host pipe material
6. Inside diameter of host pipe
7. Catch basin configuration
8. Catch basin structure dimensions



“Our **Commitment** Starts here”

THERMOPLASTICS PLAY A VITAL ROLE IN MAKING OUR WATER SUPPLY AND SEWER SYSTEMS SAFE FOR THE ENVIRONMENT – AND FOR OUR HEALTH.

Reducing water main corrosion and breakage is key to addressing the current water quality crisis in North America.

Unlike alternative materials, PVC does not serve as a nutrient for bacteria growth and its smooth interior surface is less prone to build-up of encrustants. And, because thermoplastics do not react chemically with drinking water, vinyl doesn't corrode.

Plastics consume just 2% of our oil and natural gas resources and thermoplastic resins require less energy to produce than most alternative materials.

At IPEX, we use a substantial amount of recycled plastic in many of our products. Our commitment to a safe and healthy environment starts here.

INDUSTRIAL PRODUCT OVERVIEW

Xirtec 140® PVC – Corzan® CPVC

1/2" – 24" (12mm – 600mm)

XIRTEC 140®: PVC Schedule 40 & 80 pipe and fittings systems.

CORZAN®: CPVC Schedule 80 pipe and fittings systems
cell classification 24448 & 23447



Duraplus™ ABS Industrial

3/8" – 12" (9.5mm – 300mm)

Complete ABS pressure pipe, valves and fitting systems.



PROCESS PIPING SYSTEMS



Enpure™

1/2" - 4" (12mm - 100mm)

High-purity polypropylene pipe, valves and fittings with a socket fusion joining system.



ACID WASTE SYSTEMS



Enfield™

1-1/2" - 12" (40mm - 300mm)

Electrofusion acid waste system consists of Polypropylene Schedule 40 & 80 IPS pipe and fittings.



Labline®

1-1/2" - 4" (40mm - 100mm)

Mechanical joint acid waste system in polypropylene Schedule 40 & 80 IPS pipe (flame-retardant and non-flame-retardant) and fittings.



Plenumline™

1-1/2" - 4" (40mm - 100mm)

Flame-retardant PVDF mechanical joint acid waste system made for return air plenum high-temperature corrosive chemical waste applications.



THERMOPLASTIC VALVES

Thermoplastic Valves

1/2" – 12" (12mm – 300mm)

IPEX offers a variety of manual & actuated valves in PVC, CPVC, PP, PVDF and ABS.



Guardian™

Carrier: 1/2" – 12" (15mm – 300mm)
Containment: 2" – 18" (50mm – 450mm)
Vinyl double containment and leak detection system in tough industrial grade PVC and high temperature CPVC.



Encase™

1-1/2" - 12" (40mm - 300mm)
Polypropylene double containment system for corrosive waste drainage consisting of an electrofusion fitting with a heavy-gauge resistance wire molded into the socket.



DOUBLE CONTAINMENT SYSTEMS



PAL-AT Cable Leak Detection

A microprocessor based system for continuous leak detection.



Clear-Guard

1/2" – 8" (12mm – 200mm)

Fully pressure rated clear containment PVC system with Guardian's patented Centra-Lok fitting design.



CustomGuard®

Carrier: 1/2" – 20" (15mm – 500mm)
Containment: 2" – 26" (50mm – 660mm)



Custom designed and fabricated double containment systems for similar & dissimilar materials.



Centra-Guard™

Patented point-of-collection system for above ground and below grade piping systems.

Duratec® Airline

3/8" – 1" (10mm – 25mm)
Composite pipe and fittings for conveying compressed air and inert gases.



COMPRESSED AIR

Duraplus™ Airline

1/2" – 8" (15mm – 200mm)
A high-impact, ductile ABS pressurized piping system for conveying compressed air and inert gases.



SPECIALTY PRODUCTS

Ventilation Duct

PVC 6" – 24" (150mm – 600mm)
CPVC 6" – 16" (150mm – 400mm)
Seamless PVC & CPVC ventilation duct systems for corrosive fume handling applications



Well Casings

2" – 16" (50mm – 400mm)
PVC corrosion-resistant, maintenance-free casings for well-drop-pipe and submersible pumps.



Grooved PVC Pipe

2" – 24" (50mm – 600mm)
Schedule 40, SDR 26 and SDR 21 factory-grooved PVC pipe.



Products manufactured by IPEX Inc.

Centra-Guard™, CustomGuard®, Duraplus™, Duraplus™ Airline, Duratec®, Encase™, Enpure™, Guardian™, Labline®, Plenumline™ and Xirtec® are trademarks of IPEX Branding Inc.

Valves are manufactured for IPEX Inc. by FIP S.p.A.


Corzan® is a trademark of The Lubrizol Corporation.

PLUMBING & MECHANICAL PRODUCT OVERVIEW

AquaRise®

1/2" – 4" (12mm – 100mm)

IPS SDR11 CPVC pipe, valves and fittings for hot and cold water distribution.



Pipe-with-the-Stripe®

1/2" – 2" (12mm – 50mm)

Pipe with the Stripe is available in standard and CSA-certified Polyethylene, with a permanent coloured stripe ID system.



POTABLE WATER

Blue904™

3/4" – 2" (19mm – 50mm)

PEX water service tubing made to CTS OD (SDR 9).



Q-Line®

3/4" & 1" (20mm & 25mm)

AWWA C903 composite water service tubing.



Philmac® 3G™ Compression Fittings

3/4" – 2" (20mm – 50mm)

Water line compression fittings in CTS OD and ID Series sizes.



System 636® Flue Gas Venting

1-1/2" – 8" (40mm – 200mm)

PVC-FGV Type BH Class II A vent pipe and fittings and CPVC-FGV Type BH Class II B vent.



GAS VENTING

XIRTEC & CORZAN

Xirtec 140® PVC – Corzan® CPVC

1/2" – 24" (12mm – 600mm)

XIRTEC 140®: PVC Schedule 40 & 80 pipe and fittings systems.

CORZAN®: CPVC Schedule 80 pipe and fittings systems cell classification 24448 & 23447



DWV SYSTEMS



Drainway® ABS DWV Systems

1-1/4" – 6" (32mm – 150mm)

ABS DWV pipe and fittings.

Also available in cell core.



Backwater Valves

1-1/2" – 6" (40mm – 150mm)


Available in both PVC and ABS lightweight, corrosion-resistant plastic.



Solvent Weld Sewer & Drain Piping Systems

3" – 6" (75mm – 150mm)

PVC Building Drain Sewer for sanitary, storm or septic drainage. Perforated pipe for perimeter drainage or septic fields.



Drain-Guard™ Double Containment

Carrier: 1-1/2" – 8" (40mm – 200mm)

Containment: 4" – 12" (100mm – 300mm)

(Larger sizes available upon request)

A double containment piping system using System 15 and/or System XFR as its primary components, enabling improved safety and reliability in Drain, Waste and Vent (DWV) applications.



DWV Systems

System 15: 1-1/2" – 24" (40mm – 600mm)

Drain, Waste and Vent piping for low-rise commercial or residential installation.

System XFR: 1-1/2" – 12" (40mm – 300mm)

Drain, Waste and Vent piping for high-rise commercial or residential including air plenum installations.



Cements & Primers

A complete range of cements, primers and applicators specially formulated for your pipe, valves and fittings.



CEMENTS & PRIMERS

FIRE PROTECTION

Blazemaster® Fire Sprinkler Systems

3/4" – 3" (20mm – 75mm)

CPVC Pipe & Fittings for Fire Sprinkler Systems.



aProducts manufactured by IPEX Inc.

AquaRise®, Blue904®, Drain-Guard™, Drainway®, Q-Line®, Philmac® 3G™, Polyethylene Pipe-with-the-Stripe®, System 15® & System XFR®, System 636® and Xirtec 140® are trademarks of IPEX Branding Inc.

Corzan® and BlazeMaster® are registered trademarks of The Lubrizol Corporation.

ELECTRICAL PRODUCT OVERVIEW

Scepter® Rigid PVC Conduit & Fittings

1/2" – 6" (12mm – 150mm)

Scepter Schedule 40 FT-4 rated PVC electrical conduit and fittings.



INEXO™ The ICF Box

1, 2 & 3 Gang

INEXO is an electrical box designed specifically for ICF (Insulated Concrete Form) construction for residential & commercial applications.

ELECTRICAL SYSTEMS



SceptaCon™

2" – 6" (50mm – 155mm)

SceptaCon is a gasketed, mechanical spline-locking, PVC raceway for trenchless applications.



Cor-Line® ENT & Kwikon® Fittings

1/2" – 2" (12mm – 50mm)

Cor-Line Electrical Nonmetallic Tubing (ENT) and Kwikon fittings are FT-4 rated for use in non-combustible buildings for exposed and concrete encased applications.



Sceptalight™

Light fixtures available in a variety of mounting configurations and equipped with either fluorescent or incandescent luminaries approved for use in wet or hazardous locations.

Class I, Div 2, Groups A, B, C, D
Class II, Div 2, Groups F & G



Scepter JBox™

4" – 12" (100mm – 300mm)

Scepter JBox is the next generation junction box featuring integral gasket, non-metallic fasteners, molded mounting feet, embossed gridlines and flat cover to mount devices.

NEMA 1, 2, 3R, 4, 4X, 6, 6P, 12, 13 rated

EPR KIT

1-1/4" – 6" (32mm – 150mm)

EPR repair kit and adapter for broken and damaged PVC conduit or duct.



MONOBLOC® and Interlocking Spacers

Spacers properly align and separate conduit and/or duct within a trench prior to being concrete encased.



Guy Guards

IPEX Guy Guards are safety warning devices which signal the presence of guy wires attached to telephone and power distribution poles.



Super Duct®

2" – 6" (50mm – 150mm)

Super Duct PVC pipes & fittings for direct buried concrete/masonry encased applications.



Fibertel™

1/2" – 8" (12mm – 200mm)

Fibertel™ high density polyethylene (HDPE) inner duct is ideal for short runs or cross country distances and used for a variety of communication methods and general purpose ducting applications.

TELECOMMUNICATION SYSTEMS

Products manufactured by IPEX Electrical Inc.

Cor-Line®, Fibertel™, INEXO®, JBox™, Kwikon®, MonoBloc®, SceptaCon™, Sceptalight™ and Super Duct® are trademarks of IPEX Branding Inc.

Bookmark Our Website

www.ipexna.com



**PRODUCT INFO,
TECHNICAL
DOCUMENTS,
ON-SIGHT TRAINING
& MUCH MORE ...**



OUR PRESSURE PIPING SYSTEMS & SEWER PIPING SYSTEMS DESIGN MANUALS INCLUDE:

- Standards
- Specifications
- Dimensions
- Pressure Ratings
- Design Calculations
- and much more ...

available at ipexna.com

SALES AND CUSTOMER SERVICE

Call IPEX Inc.

Toll Free: (866) 473-9462

ipexna.com

About the IPEX Group of Companies

As leading suppliers of thermoplastic piping systems, the IPEX Group of Companies provides our customers with some of the world's largest and most comprehensive product lines. All IPEX products are backed by more than 50 years of experience. With state-of-the-art manufacturing facilities and distribution centers across North America, we have earned a reputation for product innovation, quality, end-user focus and performance.

Markets served by IPEX group products are:

- Electrical systems
- Telecommunications and utility piping systems
- PVC, CPVC, PP, PVDF, PE, ABS, and PEX pipe and fittings
- Industrial process piping systems
- Municipal pressure and gravity piping systems
- Plumbing and mechanical piping systems
- Electrofusion systems for gas and water
- Industrial, plumbing and electrical cements
- Irrigation systems

Products are manufactured by IPEX Inc.

BIONAX®, BIONAX®SR™, IPEX Centurion®, IPEX Fusible™, Fusible Brute™, Fusible Series™, TerraBrute CR®, Cycle Tough®, Blue 904™, Q-Line®, Gold Stripe®, NovaForm™, Philmac® 3G™, Ring-Tite®, Enviro-Tite®, Ultra-Rib®, Ultra-X2®, Vortex Flow™, LifeSaver®, and Tempest™ are trademarks of IPEX Branding Inc.

This literature is published in good faith and is believed to be reliable. However, it does not represent and/or warrant in any manner the information and suggestions contained in this brochure. Data presented is the result of laboratory tests and field experience.

A policy of ongoing product improvement is maintained. This may result in modifications of features and/or specifications without notice.



CTMNNaip160406C © 2016 IPEX

