




17YBCVNL SERIES NO LEAD BRASS CHECK VALVE (THREADED)

Specification:



- Cast no lead brass body and poppet
- NBR O-ring seal
- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 200 PSI
- 200 PSI WOG Non-Shock - WOG pressure rating based on ambient temperature
- Max Temp Rating: 180°F (82°C)

Certification:


- NSF/ANSI Standard 372 Certified



Third Party
Certified to
NSF / ANSI 372

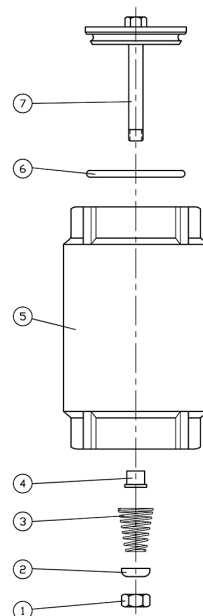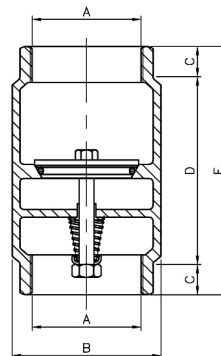

Material List		
No.	Part Name	Material
1	Hex Nut	304 Stainless Steel
2	Cup Washer	304 Stainless Steel
3	Spring	304 Stainless Steel
4	Bushing	Polyethylene
5	Body	C89540 Brass
6	O-ring	NBR
7	Poppet	C89540 Brass

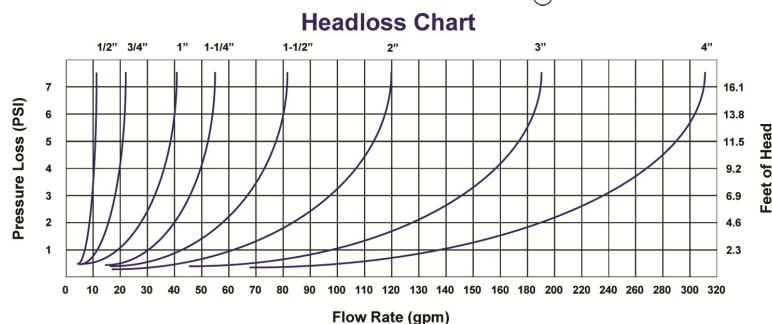

Dimensions										
Part No.	A	B		C		D		E		Weight
		inches	mm	inches	mm	inches	mm	inches	mm	
17YBCV050NL	1/2" FPT	1.220	30.99	0.374	9.5	1.614	41	2.362	59.995	180
17YBCV075NL	3/4" FPT	1.457	37.01	0.394	10.01	1.85	46.99	2.638	67.005	250
17YBCV100NL	1" FPT	1.732	43.99	0.453	11.51	2.244	57	3.15	80.01	370
17YBCV125NL	1-1/4" FPT	2.087	53.01	0.531	13.49	2.48	62.99	3.543	89.992	600
17YBCV150NL	1-1/2" FPT	2.362	59.99	0.610	15.49	2.823	71.7	3.937	100	710
17YBCV200NL	2" FPT	2.953	75.01	0.650	16.51	3.425	87	4.724	119.99	1310
17YBCV300NL	3" FPT	4.134	105	1.181	30	5.00	127	7.362	186.99	4300
17YBCV400NL	4" FPT	5.512	140	1.969	50.01	6.457	164	10.394	264.01	8400



25 Whaley Ave., Milverton, Ontario, Canada N0K 1M0

Tel: (519)-595-4444

Fax: (519)-595-4380

Toll Free: (800)-561-3164

Web: www.boshart.com