



# CO-200-R


Tag: \_\_\_\_\_

## Floor Cleanout with Round Top

### Components:



**SPECIFICATION:** Watts Drainage Products CO-200-R epoxy coated cast iron floor cleanout with 5-1/8" (130) round adjustable nickel bronze (standard) top and no hub (MJ) connection.

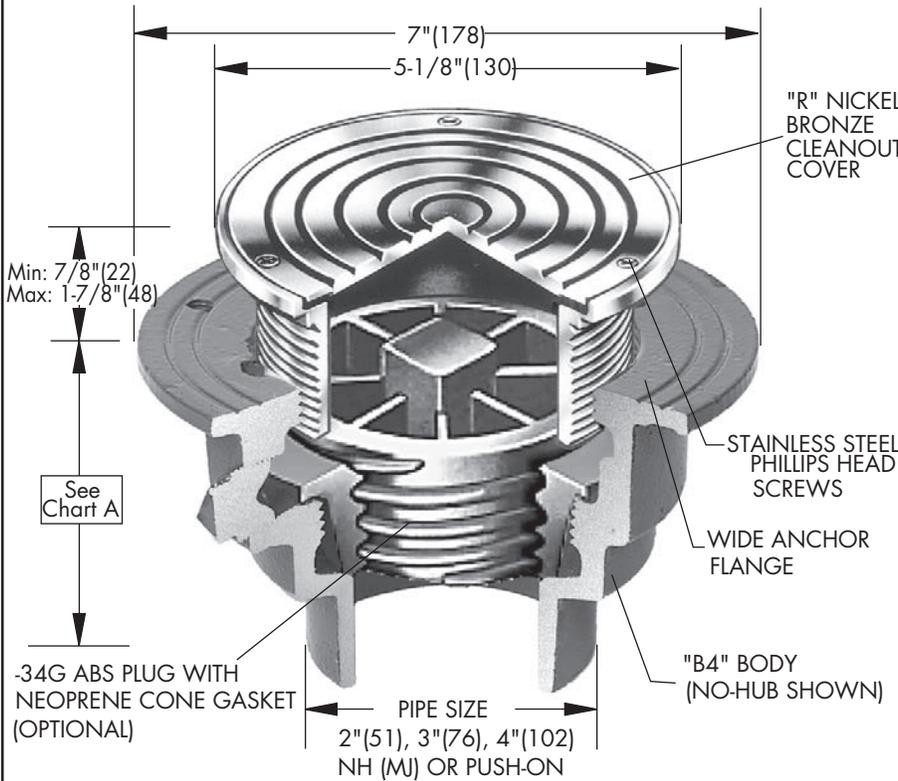

Order Code: CO-20   -  -  -  -

Ex. CO-202-R-1-6

| Pipe Sizing (Select One) |   |
|--------------------------|---|
| Suffix                   | Description                                 |
| 2                        | 2" (51) Pipe Size <input type="checkbox"/>  |
| 3                        | 3" (76) Pipe Size <input type="checkbox"/>  |
| 4                        | 4" (102) Pipe Size <input type="checkbox"/> |

| Outlet Type (Select One) |                                      |
|--------------------------|--------------------------------------|
| Suffix                   | Description                          |
| NH                       | No Hub (MJ) <input type="checkbox"/> |
| P                        | Push On <input type="checkbox"/>     |

| Cover (Select One) |   |
|--------------------|---|
| Suffix             | Description   |
| R-1                | 5" (127) Diameter, Nickel Bronze <input type="checkbox"/>   |
| R-3                | 5" (127) Diameter, Stainless Steel <input type="checkbox"/> |

| Options (Select One or More) |  |
|------------------------------|--|
| Suffix                       | Description  |
| -6                           | Vandal Proof <input type="checkbox"/>                  |
| -13                          | Galvanized Body <input type="checkbox"/>               |
| -15                          | Strainer Extension (DD-50) <input type="checkbox"/>    |
| -34G                         | ABS plug with Neoprene gasket <input type="checkbox"/> |
| -113M                        | Special Epoxy from 3M Range <input type="checkbox"/>   |
| -C                           | Membrane Clamp <input type="checkbox"/>                |
| -Z                           | Elastomeric Flange <input type="checkbox"/>            |

| Optional Body Material (NH Only) |   |
|----------------------------------|---|
| Suffix                           | Description                                       |
| -60                              | PVC Body w/Socket Outlet <input type="checkbox"/> |
| -61                              | ABS Body w/Socket Outlet <input type="checkbox"/> |

Chart A

|           | Std.    | P        | 60/61       |
|-----------|---------|----------|-------------|
| Pipe Size | No Hub  | Push On  | PVC/ABS     |
| 2" (51)   | 3" (76) | 4" (102) | 4" (102)    |
| 3" (76)   | 3" (76) | 4" (102) | 3-3/4" (95) |
| 4" (102)  | 3" (76) | 4" (102) | 3-3/4" (95) |

Load Rating

| Suffix | Load Rating |
|--------|-------------|
| R-1    | *MD         |
| R-3    | *MD         |

**NOTICE**

The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:  
MD - Safe Live Load 2000-4999 lbs.(900-2250kg)  
The above categories are given as a guide only. Please consult factory.

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_

Representative \_\_\_\_\_

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



A Watts Water Technologies Company

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

ES-WD-CO-200-R-CAN 1520

© 2015 Watts